

Product Range





Your Partner for Sealing Technology

Trelleborg Sealing Solutions is a major international developer, manufacturer and supplier of seals, bearings and molded components in polymers. We are uniquely placed to offer dedicated design and development from our market-leading product and material portfolio: a one-stop-shop providing the best in elastomer, silicone, thermoplastic, PTFE and composite technologies for applications in aerospace, industrial and automotive industries.

With 50 years of experience, Trelleborg Sealing Solutions engineers support customers with design, prototyping, production, test and installation using state-of-the-art design tools. An international network of over 70 facilities worldwide includes over 20 manufacturing sites, strategically-positioned research and development centers, including materials and development laboratories and locations specializing in design and applications.

Developing and formulating materials in-house, we utilize the resource of our material database, including over 2,000

proprietary compounds and a range of unique products. Trelleborg Sealing Solutions fulfills challenging service requirements, supplying standard parts in volume or a single custom-manufactured component, through our integrated logistical support, which effectively delivers over 40,000 sealing products to customers worldwide.

Facilities are certified to ISO 9001:2008 and ISO/TS 16949:2009. Trelleborg Sealing Solutions is backed by the experience and resources of Trelleborg Group, one of the world's foremost experts in polymer technology.

ISO 9001:2008

ISO/TS 16949:2009

Contents

02	Introduction	56	Pneumatic Seals
16	Product Overview	53	Non-standard Pneumatic Seals
32	O-Rings	60	Rotary Seals
34	Static Seals	64	Bearings & Bushings
38	Hydraulic Seals – Piston Seals	65	Engineered Seals, Gaskets and Other Parts
44	Hydraulic Seals – Rod Seals	69	Surface Finishing
50	Hydraulic Scrapers		
55	Hydraulic Wear Rings		

The information in this brochure is intended to be for general reference purposes only and is not intended to be a specific recommendation for any individual application. The application limits for pressure, temperature, speed and media given are maximum values determined in laboratory conditions. In application, due to the interaction of operating parameters, maximum values may not be achieved. It is vital therefore, that customers satisfy themselves as to the suitability of product and material for each of their individual applications. Any reliance on information is therefore at the user's own risk. In no event will Trelleborg Sealing Solutions be liable for any loss, damage, claim or expense directly or indirectly arising or resulting from the use of any information provided in this brochure. While every effort is made to ensure the accuracy of information contained herewith, Trelleborg Sealing Solutions cannot warrant the accuracy or completeness of information.

To obtain the best recommendation for a specific application, please contact your local Trelleborg Sealing Solutions marketing company.

This edition supersedes all previous brochures. This brochure or any part of it may not be reproduced without permission.

© All trademarks are the property of Trelleborg Group. The turquoise color is a registered trademark of Trelleborg Group.

© 2015, Trelleborg Group. All rights reserved.

Your Partner for Sealing Technology

“We build long term partnerships with customers and suppliers by providing leading technology and excellent service.”

OUR MISSION

We will be the supply partner of first choice within our chosen markets, working globally through our local teams. We will build long-term partnerships with customers and suppliers by providing leading technology and excellent service.

We are determined to be different.

SEALING TECHNOLOGY

Trelleborg Sealing Solutions offers an outstandingly comprehensive sealing portfolio – a one-stop-shop providing the best in elastomer, silicone, thermoplastic, PTFE and composite technologies; our solutions are featured in virtually every application conceivable within the aerospace, industrial and automotive industries.

A WORLDWIDE PRESENCE

We are uniquely placed to offer a dedicated design and development service for sealing solutions, globally servicing, supporting and supplying our customers through an unrivaled international network.

- Over 80 facilities worldwide
- More than 20 manufacturing sites
- Seven strategically positioned material and development laboratories
- Internationally linked design and application centers

COMMITMENT – TO CUSTOMERS' NEEDS LONG-TERM

The aim of Trelleborg Sealing Solutions is to facilitate customers in achieving cost-effective, durable solutions that match their specific business requirements and needs. We are one of the world's foremost experts in polymer sealing technology. We develop, manufacture and supply safety-critical polymer-based precision seals, bearings and molded components.

THE TRELLEBORG GROUP



Trelleborg Coated Systems

Leading global supplier of unique customer solutions for polymer-coated fabrics deployed in a variety of industrial applications.



Trelleborg Industrial Solutions

Market leader in such industrial application areas as hose systems, industrial antivibration solutions and selected industrial sealing systems.



Trelleborg Offshore & Construction

Leading global supplier of polymer-based critical solutions for deployment in highly demanding environments.



Trelleborg Wheel Systems

Leading global supplier of tires and complete wheels for agricultural and forestry machines, forklift trucks and other materials handling vehicles.



Trelleborg Sealing Solutions

One of the world's leading developers, manufacturers and suppliers of precision seals. It supports its aerospace, industrial and automotive customers through over 20 production facilities and more than 50 marketing companies globally.

Trelleborg Sealing Solutions Key Industries



Aerospace




Automotive



Machine Tools & Fluid Power



Off-Highway, Agriculture, Construction



Food & Beverage, Chemical Processing



Life Sciences and Pharmaceutical



Oil & Gas



Mining



Alternative Energy



Marine

Our Global Resources



Americas

- 2 R&D Centers
- 19 Marketing Companies
- 1 Logistics Centers SCM
- 6 Manufacturing Sites
- Damping Solutions
- 2 Automotive Hubs
- 4 Aerospace Hubs



- 8 Research & Development Centers
- 54 Marketing Companies
- 4 Logistics Centers
- 24 Manufacturing Sites
- Damping Solutions
- 5 Automotive Hubs
- 8 Aerospace Hubs

5,300
employees

82
worldwide
locations

More than
2,000
proprietary material
formulations

How local is your
global seal supplier?

www.global-but-local.com

Europe

-  5 R&D Centers
-  21 Marketing Companies
-  1 Logistics Centers SCM
-  14 Manufacturing Sites
-  Damping Solutions
-  1 Automotive Hubs
-  2 Aerospace Hubs

Asia

-  1 R&D Centers
-  15 Marketing Companies
-  2 Logistics Centers SCM
-  4 Manufacturing Sites
-  Damping Solutions
-  2 Automotive Hubs
-  2 Aerospace Hubs

Products, Brands and Materials

Decades of experience designing and manufacturing polymer solutions has led Trelleborg Sealing Solutions to develop, manufacture and supply a range of unique materials and proprietary product designs, many of which have become industry standards. Development is ongoing, ensuring that our solutions meet the changing needs of our customers, as well as the latest industry trends and regulations.

WORLD RENOWNED NAMES UNITED

We own many of the longest established and leading names within the seal industry. These include:

- American Variseal
- Busak+Shamban
- Dowty Seals
- Chase Walton
- Forsheda
- GNL
- Impervia
- Nordex
- Orkot
- Palmer Chenard
- Polypac
- SF Medical
- Shamban
- Silcofab
- Silcotech
- Skega
- Stefa
- Wills

PROPRIETARY MATERIALS

Ongoing development has yielded some of the most successful sealing and bearing materials available.

- HiMod®
- Isolast®
- Orkot®
- Turcite®
- Turcon®
- Turel®
- Zurcon®

OUR PIONEERING PRODUCTS

Trelleborg Sealing Solutions is pioneering and is continuously developing innovative products.

- Turcon® AQ Seal®
- D-A-S Compact Seal®
- Turcon® Double Delta®
- Turcon® Excluder®
- Turcon® Glyd Ring® T
- Turcon® Hatseal
- Zurcon® L-Cup®
- Turcite® Slydring®
- Turcite® B-Slydway®
- Turcon® Stepseal® 2K
- V-Ring®
- Turcon® Varilip® PDR
- Turcon® Variseal®
- Turcon® VL-Seal™
- Turcon® Wedgpak®
- Wills Rings®
- Zurcon® Wynseal®




To design a solution for your specific needs, contact your local Trelleborg Sealing Solutions marketing company.



Films and Animations

SEEING IS BELIEVING

Complex sealing configurations can feature a large number of sealing elements. Trying to illustrate these on a 2-D page is difficult and can never properly show their function or characteristics. Trelleborg Sealing Solutions turned to the latest graphic technologies to produce 3-D animations of applications and typical sealing solutions for them.

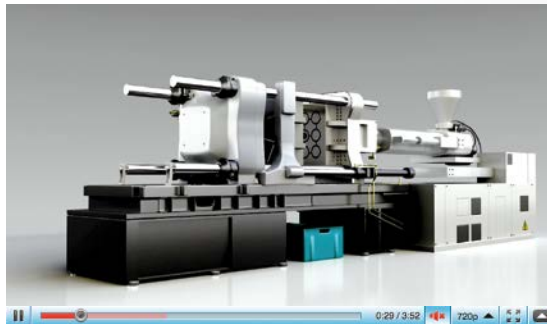

View at
[YouTube.com/
trelleborgseals](https://www.youtube.com/trelleborgseals)
You
Tube



View at
[tss.trelleborg.com/
films](https://tss.trelleborg.com/films)
TSS



Online 24-7

A range of films specific to different industries and products are available to view on the Trelleborg Sealing Solutions website or via YouTube.



Turcon® Roto L
Energy saving with no friction



0:29 / 3:55

Digital Services



ONLINE TOOLS MAKE LIFE EASIER

Trelleborg Sealing Solutions has developed a number of online tools that make the working life of an engineer specifying seals easier. All these industry-leading tools are available free-of-charge from the Trelleborg Sealing Solutions website at www.tss.trelleborg.com. To use these advanced services all you have to do is register on the Members Area.

There is also a continually increasing range of innovative engineering apps available for smartphones, both for iOS and Android devices. Just search for "Trelleborg" in the App Store or GooglePlay to find the tools to optimize your daily productivity.

Materials Search and Chemical Compatibility Check


These two programs allow you to find out the compatibility of sealing materials to hundreds of different media and help identify the most suitable material for your application.

- + Very good suitability
- Good suitability
- Limited suitability
- ✘ Unsuitable
- ? Insufficient information



O-Ring Calculator

An industry-leading tool, the easy to use O-Ring calculator includes sizing capabilities, compression forces, design parameter recommendations and complete measurements. Results and comments may be printed, shared or filed as PDF.

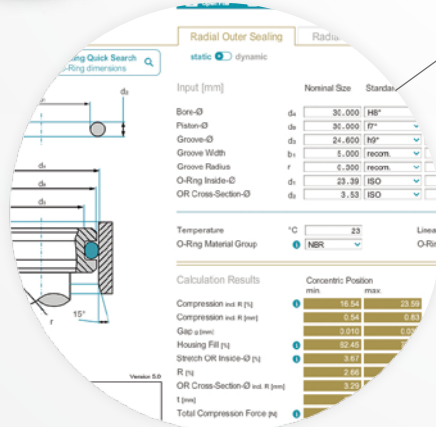



Versatile CAD Service

The CAD download facility provides thousands of drawings of a wide range of seals. It gives the option of 2- or 3-dimensional files in a range of formats to suit most commonly used CAD systems.



Sealing Solutions Configurator

The Sealing Solutions Configurator is the first tool of its kind offered by any seal supplier. It allows engineers to identify a proven sealing solution for their specific application in just four easy steps.



Powerful Electronic Catalog

Search through over 100,000 seals by item number or their properties and access comprehensive and detailed information plus an interactive quote facility.



E-Learning on sealing technology

Trelleborg Sealing Solutions has a number of e-Learning modules available on several aspects of sealing technology.



For more information
www.tss.trelleborg.com

Mobile Apps and Services

We understand the needs of engineers on the go. Check out our latest mobile tools and apps, ranging from an O-Ring calculator to unit and hardness converters. Just search for "Trelleborg" in the App Store or Google Play to find the tools to optimize your daily productivity.




ISO Fits & Tolerances App

Simply enter the nominal diameter and select the tolerance classes for bore and shaft to find the complete ISO fits definition with all relevant values including type of fit, with handy graphs to illustrate the classes by bore and shaft.



Technical Glossary App

This app provides definitions of more than 2,000 terms from the world of sealing technology and engineering.

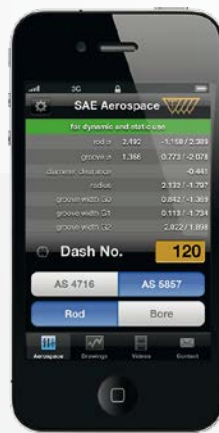

Aerospace Groove Selector App

This app covers two of the most important SAE aerospace groove standards for hydraulic systems, AS4716 Rev B and AS5857 Rev A, making it really easy to find the size of grooves and hardware needed.



Installation Instructions App

Videos demonstrate the best practice methods for installing seals, providing all relevant documentation within the interface, guiding you to a successful installation of Radial Oil Seals and Turcon® and Zurcon® rod and piston seals.



Unit & Hardness Converter App

Intuitive and very easy to use, simply select the dimension and enter the value for conversion. The app offers a wide range of engineering and scientific units for each dimension.





For more information
www.tss.trelleborg.com



in the groove app

Our in the groove magazine provides news, technical and product information on seals, as well as insights into the markets they are used in. The magazine is also available in print and as an interactive PDF.



O-Ring Calculator App

When a user enters installation specifications into the O-Ring Calculator app, such as the bore or rod/shaft diameter, the app quickly calculates O-Ring and housing dimensions in both metric and inch.




Hydraulic Cylinder Calculator

Quickly calculate areas and volumes in cylinders, extraction and retraction forces, time velocity and outflow by entering the requisite dimensions and parameters of the cylinder. In compliance with ISO 3320, ISO 3321 and ISO 4393.







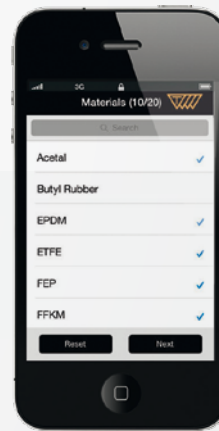













Tubing and Hose App






Developed specially for life sciences engineers, this app helps you to easily choose the correct tubing and hose based on material, pressure and dimensions, removing the need to search through catalogs.
























Material Compability App



Cross reference a wide variety of different materials with chemical environments to find the most effective compounds for your application. Select up to 20 materials at once to produce an easy to read compatibility chart with recommendations for use.






O-Rings		Sealing and Bearing Materials									Applications	Operating Range		
		Turcon®	Zurcon®	Turcite®	Orkot®	HiMod®	PTFE	Elastomeric	Polyurethane	Other Polymeric		Metal	Pressure	Temperature
Type	Page													
Elastomeric O-Ring  general purpose	32						•				   D	200 MPa 29,000 psi	-60 °C +200 °C -75 °F +390 °F	0.5 m/s 1.6 ft/s
Polyurethane O-Ring  hydraulics abrasion resistance	32		•					•			   D	200 MPa 29,000 psi	-30 °C +100 °C -20 °F +210 °F	— —
FlexiMold™ O-Ring  general purpose large dimensions	32						•				   D	200 MPa 29,000 psi	-60 °C +200 °C -75 °F +390 °F	0.5 m/s 1.6 ft/s
FEP O-Ring  chemical industry aggressive media	33						•		•		 D	25 MPa 3,625 psi	-60 °C +200 °C -75 °F +390 °F	— —
PTFE O-Ring  chemical industry aggressive media	33					•					 D	40 MPa 5,800 psi	-200 °C +260 °C -325 °F +500 °F	— —
Isolast® Perfluoroelastomer O-Ring  chemical industry aggressive media high temperatures	33						•				 D	200 MPa 29,000 psi	-25 °C +325 °C -10 °F +615 °F	— —






KEY TO APPLICATIONS: Reciprocating =  Rotary =  Oscillating =  Helix =  Static =  Single-acting = **S** Double-acting = **D**










Static seals		Sealing and Bearing Materials										Operating Range			
		Turcon®	Zurcon®	Turcite®	Orkot®	HiMod®	PTFE	Elastomeric	Polyurethane	Other Polymeric	Metal	Applications	Pressure	Temperature	Velocity
Type	Page														
Zurcon® Dualseal  mobile hydraulics twist-free	34		•									* D	50 MPa 7,250 psi	-35 °C +110 °C -30 °F +230 °F	— —
Quad-Ring® Seal  general purpose twist-free	34						•					 *  D 	40 MPa 5,800 psi	-30 °C +200 °C -20 °F +390 °F	up to 2 m/s up to 6.5 ft/s
Kantseal  general purpose for flanges axial static	34						•					* D	50 MPa 7,250 psi	-30 °C +200 °C -20 °F +390 °F	— —
Back-up Ring  general purpose for O-Ring and Quad-Ring® seals	35	•	•			•	•	•	•	•		 *	250 MPa 36,250 psi	-200 °C +260 °C -325 °F +500 °F	0.5 m/s 1.6 ft/s
Wills Rings® O  general purpose sealing extreme conditions flange applications	35										•	* D	1,000 MPa 145,000 psi	up to +850 °C up to +1.560 °F	— —
Wills Rings® C  general purpose sealing extreme conditions flange applications	35										•	* S	200 MPa 29,000 psi	up to +750 °C up to +1.380 °F	— —
Turcon® Variseal® H  chemical industry gasket fittings gas sealing	36	•	•									 *  S 	40 MPa 5,800 psi	-100 °C +200 °C -150 °F +390 °F	— —
Turcon® Variseal® HF  chemical industry flange fittings gas sealing	36	•	•									* S	60 MPa 8,700 psi	-150 °C +200 °C -240 °F +390 °F	— —
Zurcon® SAE J 518 Flange Seals  mobile hydraulics general mechanical applications	36		•					•				* S	42 MPa 6,000 psi	-35 °C +110 °C -30 °F +230 °F	— —






KEY TO APPLICATIONS: Reciprocating =  Rotary =  Oscillating =  Helix =  Static =  Single-acting = S Double-acting = D












Static seals		Sealing and Bearing Materials									Operating Range			
		Turcon®	Zurcon®	Turcite®	Orkot®	HiMod®	PTFE	Elastomeric	Polyurethane	Other Polymeric	Metal	Applications	Pressure	Temperature
Type	Page													
Bonded Seal	37										☼	100 MPa 14,500 psi	-30 °C +200 °C -20 °F +390 °F	— —
 general purposes general machine operation automotive industry							•				D			
Airseal	37										☼	1 MPa 145 psi	-50 °C +220 °C -55 °F +430 °F	— —
 chemical industry general mechanical applications							•				D			







Hydraulic Seals – Piston Seals		Sealing and Bearing Materials									Operating Range			
		Turcon®	Zurcon®	Turcite®	Orkot®	HiMod®	PTFE	Elastomeric	Polyurethane	Other Polymeric	Metal	Applications	Pressure	Temperature
Type	Page													
Turcon® Glyd Ring®	38		•	•							↕	60 MPa 8,700 psi	-45 °C +200 °C -50 °F +390 °F	15 m/s 50 ft/s
 hydraulics general machine operation machine tools mobile hydraulics											D			
Turcon® Glyd Ring® T	38		•	•							↕	60 MPa 8,700 psi	-45 °C +200 °C -50 °F +390 °F	15 m/s 50 ft/s
 hydraulics general machine operation machine tools mobile hydraulics											D			
Zurcon® Glyd Ring® P	38			•							↕	50 MPa 7,250 psi	-30 °C +110 °C -20 °F +230 °F	1 m/s 3 ft/s
 mobile hydraulics construction machinery											D			
Turcon® Double Delta®	39		•	•							↕	35 MPa 5,075 psi	-45 °C +200 °C -50 °F +390 °F	15 m/s 50 ft/s
 hydraulics light hydraulics medium hydraulics											D			
Turcon® AQ Seal®	39		•	•				•			↕ ☼	50 MPa 7,250 psi	-45 °C +200 °C -50 °F +390 °F	2 m/s 6.5 ft/s
 hydraulics medium operation piston accumulators											D			






KEY TO APPLICATIONS: Reciprocating =  Rotary =  Oscillating =  Helix =  Static =  Single-acting = **S** Double-acting = **D**










Hydraulic Seals – Piston Seals		Sealing and Bearing Materials										Operating Range						
		Turcon®	Zurcon®	Turcite®	Orkot®	HiMod®	PTFE	Elastomeric	Polyurethane	Other Polymeric	Metal	Applications	Pressure	Temperature	Velocity			
Turcon® AQ Seal® 5	39																	
 hydraulics fluid/gas separation mobile hydraulics heavy operation		•	•					•						60 MPa 8,700 psi	-45 °C +200 °C -50 °F +390 °F	3 m/s 10 ft/s		
Turcon® Stepseal® 2K	40																	
 hydraulics general machine operation machine tools mobile hydraulics		•	•											60 MPa 8,700 psi	-45 °C +200 °C -50 °F +390 °F	15 m/s 50 ft/s		
Turcon® Stepseal® V	40																	
 hydraulics general machine operation machine tools mobile hydraulics		•	•											60 MPa 8,700 psi	-45 °C +200 °C -50 °F +390 °F	15 m/s 50 ft/s		
Zurcon® Wynseal	40																	
 hydraulics light hydraulics medium duty			•											40 MPa 5,800 psi	-35 °C +110 °C -30 °F +230 °F	0.8 m/s 2.6 ft/s		
Zurcon® Wynseal M	41																	
 hydraulics light hydraulics medium duty		•	•											50 MPa 7,250 psi	-45 °C +200 °C -50 °F +390 °F	10 m/s 33 ft/s		
Zurcon® U-Cup	41																	
 fluid power hydraulic cylinders general maintenance			•											40 MPa 5,800 psi	-35 °C +110 °C -30 °F +230 °F	0.5 m/s 1.6 ft/s		
Compact Seal® Polypac® DBM	41																	
 hydraulics standard cylinder light to medium duty			•		•		•	•						35 MPa 5,075 psi	-35 °C +100 °C -30 °F +210 °F	0.5 m/s 1.6 ft/s		
PHD / CST Seal	42																	
 hydraulics mobile hydraulics construction machinery		•	•				•							40 MPa 5,800 psi	-45 °C +135 °C -50 °F +275 °F	1.5 m/s 5 ft/s		
Turcon® Variseal® M2	42																	
 hydraulics chemical industry aggressive media		•	•											Dynamic 20 MPa 2,900 psi Static 40 MPa 5,800 psi	-70 °C +300 °C -95 °F +570 °F	Linear 15 m/s 50 ft/s Oscillating / Rotary / Helix 1.3 m/s 4.2 ft/s		






KEY TO APPLICATIONS: Reciprocating =  Rotary =  Oscillating =  Helix =  Static =  Single-acting = **S** Double-acting = **D**







Hydraulic Seals – Piston Seals		Sealing and Bearing Materials										Operating Range		
		Turcon®	Zurcon®	Turcite®	Orkot®	HiMod®	PTFE	Elastomeric	Polyurethane	Other Polymeric	Metal	Applications	Pressure	Temperature
Type	Page													
Turcon® Variseal® W2  chemical industry general mechanical applications	42	•	•								    S	Dynamic 20 MPa 2,900 psi Static 40 MPa 5,800 psi	-70 °C +300 °C -95 °F +570 °F	Linear 15 m/s 50 ft/s Oscillating / Rotary / Helix 1.3 m/s 4.2 ft/s
Turcon® VL Seal®  hydraulics general machine operation machine tools mobile hydraulics	43	•	•								 S	60 MPa 8,700 psi	-45 °C +200 °C -50 °F +390 °F	15 m/s 50 ft/s
VEEPAC  hydraulic cylinders machine presses mining, steel mills water management	43						•				 S	40 MPa 5,800 psi	-30 °C +200 °C -20 °F +390 °F	0.5 m/s 1.6 ft/s
Selemaster DSM  hydraulic cylinders presses mining, steel mills water management	43						•				 D	70 MPa 10,150 psi	-40 °C +130 °C -40 °F +270 °F	0.5 m/s 1.6 ft/s






Hydraulic Seals – Rod Seals		Sealing and Bearing Materials										Operating Range		
		Turcon®	Zurcon®	Turcite®	Orkot®	HiMod®	PTFE	Elastomeric	Polyurethane	Other Polymeric	Metal	Applications	Pressure	Temperature
Type	Page													
Turcon® Stepseal® 2K  hydraulics general machine operation machine tools mobile hydraulics	44	•	•								 S	60 MPa 8,700 psi	-45 °C +200 °C -50 °F +390 °F	15 m/s 50 ft/s
Turcon® Stepseal® V  hydraulics machine operation machine tools mobile hydraulics	44	•	•								 S	60 MPa 8,700 psi	-45 °C +200 °C -50 °F +390 °F	15 m/s 50 ft/s
Zurcon® Rimseal  hydraulics general machine operation machine tools mobile hydraulics	44		•								 S	60 MPa 8,700 psi (in tandem)	-45 °C +110 °C -50 °F +230 °F	5 m/s 16 ft/s (in tandem)




























KEY TO APPLICATIONS: Reciprocating =  Rotary =  Oscillating =  Helix =  Static =  Single-acting = S Double-acting = D






Hydraulic Seals – Rod Seals		Sealing and Bearing Materials										Operating Range							
		Turcon®	Zurcon®	Turcite®	Orkot®	HIMod®	PTFE	Elastomeric	Polyurethane	Other Polymeric	Metal	Applications	Pressure	Temperature	Velocity				
Zurcon® U-Cup RU9	45		•																
 hydraulic cylinder mobile hydraulic industrial hydraulic																			
Zurcon® Buffer Seal	45		•																
 earth moving equipment mobile hydraulic construction machinery																			
Balsele	45																		
 hydraulic cylinders presses mobile plant																			
Zurcon® L-Cup®	46		•																
 hydraulics standard cylinders																			
Turcon® Variseal® M2	46																		
 hydraulics, chemical industry general mechanical applications aggressive media food & beverage			•	•															
Turcon® Variseal® W2	46																		
 chemical industry general mechanical applications			•	•															
Turcon® VL Seal®	47																		
 hydraulics general machine operation machine tools mobile hydraulics			•	•															
Turcon® Glyd Ring®	47																		
 hydraulics general machine operation machine tools mobile hydraulics			•	•															
Turcon® Glyd Ring® T	47																		
 hydraulics general machine operation machine tools mobile hydraulics			•	•															













KEY TO APPLICATIONS: Reciprocating =  Rotary =  Oscillating =  Helix =  Static =  Single-acting = **S** Double-acting = **D**






Hydraulic Seals – Rod Seals		Sealing and Bearing Materials										Applications	Operating Range				
		Turcon®	Zurcon®	Turcite®	Orkot®	HiMod®	PTFE	Elastomeric	Polyurethane	Other Polymeric	Metal		Pressure	Temperature	Velocity		
Type	Page																
Turcon® AQ Seal® with Bean Seal  hydraulics general machine operation fluid/gas separation medium duty	48	•	•												50 MPa 7,250 psi	-45 °C +110 °C -50 °F +230 °F	2 m/s 6.5 ft/s
Turcon® AQ Seal® 5 with Bean Seal  hydraulics, fluid/gas separation mobile hydraulics heavy operation	48	•	•												60 MPa 8,700 psi	-45 °C +110 °C -50 °F +230 °F	3 m/s 10 ft/s
Zurcon® Wynseal M  hydraulics light hydraulics medium duty	48	•	•												50 MPa 7,250 psi	-45 °C +200 °C -50 °F +230 °F	10 m/s 33 ft/s
Turcon® Double Delta®  hydraulics light hydraulics medium duty	49	•	•												35 MPa 5,000 psi	-45 °C +200 °C -50 °F +390 °F	15 m/s 50 ft/s
VEEPAC  hydraulic cylinders presses, mining steel mills water management	49														40 MPa 5,800 psi	-30 °C +200 °C -20 °F +390 °F	0.5 m/s 1.6 ft/s
Selemaster SM  hydraulic cylinders presses, mining steel mills water management	49														70 MPa 10,150 psi	-40 °C +130 °C -40 °F +270 °F	0.5 m/s 1.6 ft/s
















KEY TO APPLICATIONS: Reciprocating =  Rotary =  Oscillating =  Helix =  Static =  Single-acting = **S** Double-acting = **D**









Hydraulic Scrapers		Sealing and Bearing Materials										Applications	Operating Range		
		Turcon®	Zurcon®	Turcite®	Orkot®	HiMod®	PTFE	Elastomeric	Polyurethane	Other Polymeric	Metal		Pressure	Temperature	Velocity
Type	Page														
Turcon® Excluder® 2	50											 	—	-45 °C +200 °C -50 °F +390 °F	15 m/s 50 ft/s
 light hydraulics machine tools		•	•										—		
Turcon® Excluder® 5	50											 	—	-45 °C +200 °C -50 °F +390 °F	15 m/s 50 ft/s
 medium hydraulics mobile hydraulics		•	•										—		
Turcon® Excluder® F	50											 	—	-45 °C +200 °C -50 °F +390 °F	15 m/s 50 ft/s
 hydraulics machine operation machine tools medium duty		•	•										—		
Turcon® Excluder® G	51											 	—	-45 °C +200 °C -50 °F +390 °F	5 m/s 16 ft/s
 hydraulics machine operation mobile hydraulics heavy duty		•	•										—		
Zurcon® Scraper DA22	51											 	—	-35 °C +100 °C -30 °F +210 °F	1 m/s 3 ft/s
 hydraulics general purpose industrial hydraulics ISO 6195 housing			•										—		
Zurcon® Scraper DA24	51											 	—	-35 °C +100 °C -30 °F +210 °F	0.5 m/s 1.6 ft/s
 hydraulics mobile hydraulics			•										—		
Scraper DA17	52											 	—	-30 °C +100 °C -20 °F +210 °F	1 m/s 3 ft/s
 hydraulics general purpose							•						—		
Scraper DA27	52											 	—	-30 °C +100 °C -20 °F +210 °F	1 m/s 3 ft/s
 hydraulics industrial hydraulics presses							•						—		
Zurcon® Scraper ASW	52											 	—	-35 °C +100 °C -30 °F +210 °F	1 m/s 3 ft/s
 hydraulics general purpose			•										—		






KEY TO APPLICATIONS: Reciprocating =  Rotary =  Oscillating =  Helix =  Static =  Single-acting = **S** Double-acting = **D**











Hydraulic Scrapers		Sealing and Bearing Materials										Applications	Operating Range				
		Turcon®	Zurcon®	Turcite®	Orkot®	HiMod®	PTFE	Elastomeric	Polyurethane	Other Polymeric	Metal		Pressure	Temperature	Velocity		
Type	Page																
Scraper SA	53											 S	— —	-30 °C +110 °C -20 °F +230 °F	1 m/s 3 ft/s		
 hydraulics general purpose							●										
Scraper WRM	53											 S	— —	-30 °C +110 °C -20 °F +230 °F	1 m/s 3 ft/s		
 hydraulics general purpose							●										
Metal Scraper	53											 S	— —	-40 °C +120 °C -40 °F +250 °F	1 m/s 3 ft/s		
 hydraulics general purpose							●			●							
Zurcon® Scraper WNE	54		●									 S	— —	-35 °C +100 °C -30 °F +210 °F	1 m/s 3 ft/s		
 agricultural machinery mobile hydraulics			●														
Zurcon® Scraper WNV	54		●									 D	— —	-35 °C +100 °C -30 °F +210 °F	1 m/s 3 ft/s		
 agricultural machinery mobile hydraulics ISO standard cylinders			●														
Zurcon® Scraper SWP	54		●									 S	— —	-35 °C +100 °C -30 °F +210 °F	1 m/s 3 ft/s		
 mobile hydraulics construction machinery link-pin sealing			●														









KEY TO APPLICATIONS: Reciprocating =  Rotary =  Oscillating =  Helix =  Static =  Single-acting = **S** Double-acting = **D**






Hydraulic Wear Rings		Sealing and Bearing Materials										Operating Range		
		Turcon®	Zurcon®	Turcite®	Orkot®	HiMod®	PTFE	Elastomeric	Polyurethane	Other Polymeric	Metal	Applications	Radial Bearing Pressure	Temperature
Type	Page													
 Turcite® Slydring® hydraulics general purpose standard cylinders	55			●							   	15 MPa 2,200 psi	-60 °C +200 °C -75 °F +390 °F	15 m/s 50 ft/s
 HiMod® Slydring® hydraulics general purpose standard cylinders mobile hydraulics	55				●						   	50 MPa 7,200 psi	-40 °C +135 °C -40 °F +275 °F	1 m/s 3 ft/s
 Orkot® Slydring® hydraulics general purpose standard cylinders mobile hydraulics	55			●							   	120 MPa 17,400 psi	-60 °C +130 °C -75 °F +270 °F	1 m/s 3 ft/s










Pneumatic Seals		Sealing and Bearing Materials										Operating Range		
		Turcon®	Zurcon®	Turcite®	Orkot®	HiMod®	PTFE	Elastomeric	Polyurethane	Other Polymeric	Metal	Applications	Pressure	Temperature
Type	Page													
 Pneumatic Piston Seal	56		●					●			 S D	1.6 MPa 232 psi	-40 °C +85 °C -40 °F +185 °F	1 m/s 3 ft/s
 Pneumatic Rod Seal and Rod Seal - Scraper Combination	56		●				●	●			 S D	1.6 MPa 232 psi	-40 °C +150 °C -40 °F +300 °F	up to 5 m/s up to 16 ft/s
 Pneumatic Scraper / Scraper for Guiding Units	56							●			 S	— —	-40 °C +80 °C -40 °F +175 °F	up to 4 m/s up to 13 ft/s
 Pneumatic Cushioning Seal	57		●					●			 S	1.6 MPa 232 psi	-40 °C +110 °C -40 °F +230 °F	1 m/s 3 ft/s






KEY TO APPLICATIONS: Reciprocating =  Rotary =  Oscillating =  Helix =  Static =  Single-acting = S Double-acting = D








Pneumatic Seals		Sealing and Bearing Materials										Operating Range			
		Turcon®	Zurcon®	Turcite®	Orkot®	HiMod®	PTFE	Elastomeric	Polyurethane	Other Polymeric	Metal	Applications	Pressure	Temperature	Velocity
Type	Page														
Pneumatic Glyd Ring® for Pistons and Rods 	57	•	•									 	1.6 MPa 232 psi	-30 °C +200 °C -20 °F +390 °F	5 m/s 16 ft/s
Pneumatic Wear Ring for Pistons and Rods 	57	•	•		•							  	40 MPa 5.800 psi	-40 °C +110 °C -40 °F +230 °F	1 m/s 3 ft/s
Complete Magnet Piston 	58						•	•		•		 	1.6 MPa 232 psi	-40 °C +80 °C -40 °F +175 °F	up to 1 m/s up to 3 ft/s














Non-standard Pneumatic Seals		Sealing and Bearing Materials										Operating Range			
		Turcon®	Zurcon®	Turcite®	Orkot®	HiMod®	PTFE	Elastomeric	Polyurethane	Other Polymeric	Metal	Applications	Pressure	Temperature	Velocity
Type	Page														
Rubber-to-Metal and Rubber-to-Plastic Bonded Parts 	59											 	—	—	—
Special and Customized Solutions in Polyurethane 	59											 	—	—	—
Engineered Molded Elastomeric Parts 	59												—	—	—






KEY TO APPLICATIONS: Reciprocating =  Rotary =  Oscillating =  Helix =  Static =  Single-acting = **S** Double-acting = **D**


























Rotary Seals		Sealing and Bearing Materials										Operating Range							
		Turcon®	Zurcon®	Turcite®	Orkot®	HIMod®	PTFE	Elastomeric	Polyurethane	Other Polymeric	Metal	Applications	Pressure	Temperature	Velocity				
Radial Oil Seal	60																		
 general purpose general mechanical applications																			
Shaft Repair Kit	60																		
 repair of worn shafts for non-hardened shaft																			
Sealing Cap	60																		
 gear manufacturing																			
Turcon® Varilip® PDR	61																		
 general purpose general mechanical applications compressors, vacuum pumps gearboxes																			
V-Ring®	61																		
 general purpose general mechanical applications																			
GAMMA Seal	61																		
 mobile hydraulics power transmission																			
STEFA System 500 / 3000 / 5000 Cassette Seal	62																		
 mobile hydraulics construction machinery																			
Turcon® Roto Glyd Ring®	62																		
 hydraulics general purpose rotary applications																			
Turcon® Roto Variseal®	62																		
 general mechanical applications chemical industry																			






KEY TO APPLICATIONS: Reciprocating =  Rotary =  Oscillating =  Helix =  Static =  Single-acting = **S** Double-acting = **D**


Rotary Seals		Sealing and Bearing Materials										Operating Range			
		Turcon®	Zurcon®	Turcite®	Orkot®	HIMod®	PTFE	Elastomeric	Polyurethane	Other Polymeric	Metal	Applications	Pressure	Temperature	Velocity
Turcon® Roto VL Seal®	63	•	•									  S	30 MPa 4,350 psi	-45 °C +200 °C -50 °F +390 °F	2 m/s 6.5 ft/s
 hydraulics general rotary machine applications construction swivels and rotary connections															
Zurcon® Roto Glyd Ring® S	63		•									 D	40 MPa 5,800 psi	-30 °C +100 °C -20 °F +210 °F	PV Limit 6.5 MPa x m/s 2,916 psi x ft/s
 machine tools rotary connections															
Mechanical Face Seals	63										•		0.3 MPa 43.5 psi	-45 °C +200 °C -50 °F +390 °F	3 m/s 10 ft/s
 tracked vehicles tunnel boring machines heavy trucks conveyor systems															

Bearings & Bushings		Sealing and Bearing Materials										Operating Range			
		Turcon®	Zurcon®	Turcite®	Orkot®	HIMod®	PTFE	Elastomeric	Polyurethane	Other Polymeric	Metal	Applications	Radial Bearing Pressure	Temperature	Velocity
Turcite®-B Slydway®	64			•								 	9 MPa 1,300 psi	up to +260 °C up to +500 °F	1 m/s 3 ft/s
 chemical industry aggressive media															
Turcite® Bearings	64			•								   	15 MPa 2,200 psi	-60 °C +200 °C -75 °F +390 °F	15 m/s 50 ft/s
 general mechanical applications															
Orkot® Marine and Hydro Bearings	64				•							   	Dynamic 90 MPa 13,000 psi Static 120 MPa 17,400 psi	-60 °C +250 °C -75 °F +480 °F	6 m/s 20 ft/s
 marine hydropower															









KEY TO APPLICATIONS: Reciprocating =  Rotary =  Oscillating =  Helix =  Static =  Single-acting = **S** Double-acting = **D**






Engineered Seals, Gaskets and other Parts		Materials									Applications	Operating Range		
		Turcon®	Zurcon®	Turcite®	Orkot®	HiMod®	PTFE	Elastomeric	Polyurethane	Other Polymeric		Metal	Pressure	Temperature
Type	Page													
Engineered Molded Elastomeric Parts  various custom applications	65										    	—	up to +325 °C up to +615 °F	—
							•	•	•			—		—
Engineered PTFE Components  various custom applications	65						•				 	—	up to +260 °C up to +500 °F	—
Engineered HiMod® FlatSeal™ chemical and processing industries	65											25 MPa 3,625 psi	-210 °C +550 °C 345 °F +1.020 °F	—
Rubber-to-Metal and Rubber-to-Plastic Bonded Parts various custom applications across all industries from a wide range of materials	66						•	•	•	•	   	—	-60 °C +325 °C -75 °F +615 °F	—
												—		—
Rubber and Rubber-to-Metal Bonded Gaskets various custom applications across all industries from a wide range of materials	66						•			•		—	-60 °C +325 °C -75 °F +615 °F	—
												—		—
Ground Balls  check valves	66						•					—	-30 °C +200 °C -20 °F +390 °F	—
												—		—
Elastomer Diaphragms  pumps valves regulators and actuators	67						•	•	•	•	  	(Not reinforced) 0.05 MPa 7 psi (Reinforced) 10 MPa 1,450 psi	-50 °C +325 °C -55 °F +615 °F	—
												—		—
Custom-made HiMod® High Modulus Plastics 	67						•					—	up to +300 °C up to +570 °F	—
												—		—
Liquid Silicone (LSR) Molded Parts custom applications including Life Sciences, Food & Pharmaceutical, Sanitary and Automotive	67						•				 	—	-40 °C +175 °C -40 °F +350 °F	—
												—		—

KEY TO APPLICATIONS: Reciprocating =  Rotary =  Oscillating =  Helix =  Static =  Single-acting = **S** Double-acting = **D**

Engineered Seals, Gaskets and other Parts		Materials										Applications	Operating Range				
		Turcon®	Zurcon®	Turcite®	Orkot®	HIMod®	PTFE	Elastomeric	Polyurethane	Other Polymeric	Metal		Pressure	Temperature	Velocity		
Type	Page																
Two Component (2K) Liquid Silicone Parts various custom applications including Life Sciences, Food & Pharmaceutical and Automotive	68							●		●		↔ * ↻	— —	-40 °C +150 °C -40 °F +300 °F	— —		
Silicone Hose and Tube medical tubing and profiles, reinforced hose and related value-added assemblies	68							●				↔ * S	— —	-40 °C +175 °C -40 °F +350 °F	— —		
Rubore® Seals  rubber-metal composite for custom made applications, various possible geometries and designs	68						●	●			●	↔ * ↻	— —	-40 °C +165 °C -40 °F +329 °F	— —		

KEY TO APPLICATIONS: Reciprocating = ↔ Rotary = ↻ Oscillating = ↺ Helix = ↻ Static = * Single-acting = S Double-acting = D

Surface Finishing		Sealing and Bearing Materials										Operating Range			
		Turcon®	Zurcon®	Turcite®	Orkot®	HiMod®	PTFE	Elastomeric	Polyurethane	Other Polymeric	Metal	Applications	Group	Temperature	Velocity
Flexcoat™ coatings	69		●					●	●			 	—	-40 °C +175 °C -40 °F +350 °F	—
computer controlled secure processes water-based												 	—		—
Flexcoat™ colored coatings	69		●					●	●			 	—	-40 °C +150 °C -40 °F +300 °F	—
computer controlled secure processes water-based												 	—		—
Flexclean™ cleaning solutions	69		●				●	●	●				—	—	—
computer controlled secure processes													—	—	—


KEY TO APPLICATIONS: Reciprocating =  Rotary =  Oscillating =  Helix =  Static =  Single-acting = **S** Double-acting = **D**



Elastomeric O-Ring

A double-acting seal for static and dynamic applications. Available in various materials including NBR, FKM, EPDM, chloroprene, silicone and fluorosilicone. Available to ISO 3601, AS 568 and other recognized standards.


Ø Range	Pressure Range	Temperature Range	Velocity
from 0.5 mm	200 MPa	-60 °C +200 °C	0.5 m/s
from 0.02 in	29,000 psi	-75 °F +390 °F	1.6 ft/s

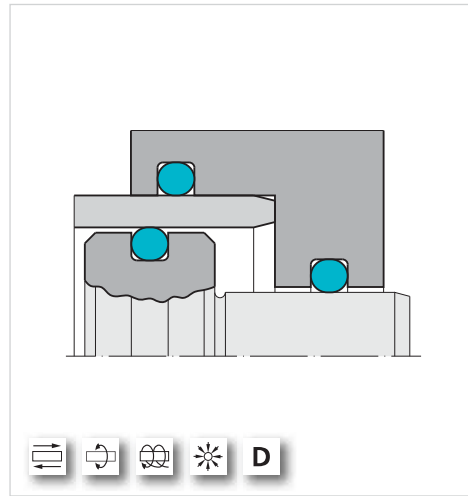

Polyurethane O-Ring

Polyurethane O-Rings are especially suited wherever O-Rings are subject to dynamic loads. This includes, for example, applications in hydraulics, pneumatics and in a wide range of other critical areas. In many cases, polyurethane O-Rings are used instead of NBR due to their high mechanical strengths.


Ø Range	Pressure Range	Temperature Range	Velocity
from 2.5 mm	200 MPa	-30 °C +100 °C	-
from 0.1 in	29,000 psi	-20 °F +210 °F	-

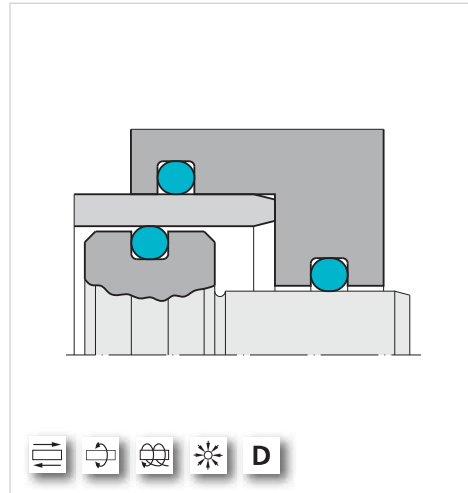

FlexiMold™ O-Ring

Trelleborg Sealing Solutions has developed a proprietary manufacturing technology, FlexiMold™, that allows the manufacturing of large, high quality O-Rings without the leadtime and cost associated with dedicated tooling. Compared to conventional techniques such as the splicing of extruded cord, the FlexiMold™ process ensures full visual and dimensional integrity. The tolerances according to ISO 3601-1, class B apply for the inside diameters and cross sections.

Ø Range	Pressure Range	Temperature Range	Velocity
0.5 – 1,000 mm	200 MPa	-60 °C +200 °C	0.5 m/s
0.020 in – 39 in	29,000 psi	-75 °F +390 °F	1.6 ft/s

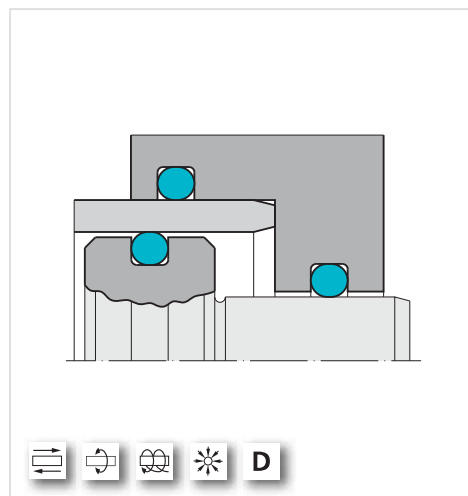


KEY TO APPLICATIONS: Reciprocating = Rotary = Oscillating = Helix = Static = Single-acting = S Double-acting = D



FEP O-Ring

This encapsulated O-Ring is produced from silicone or fluorocarbon with a seamless FEP jacket. These seals can solve sealing problems due to their chemical resistance coupled with elastic properties and low friction. Available to ISO 3601, AS 568 and BS 4518 and other standards including hollow and square sections. Available in both inch and metric sizes.


Ø Range	Pressure Range	Temperature Range	Velocity
from 7.7 mm	25 MPa	-60 °C +200 °C	—
from 0.300 in	3,625 psi	-75 °F +390 °F	—

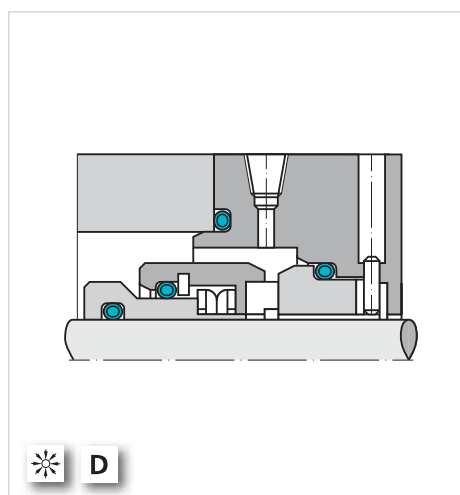

PTFE O-Ring

For axial static face or flange-type applications. Resistant to practically all chemicals and to high temperatures. Available in any required size.


Ø Range	Pressure Range	Temperature Range	Velocity
0.5 - 1,000 mm	40 MPa	-200 °C +260 °C	—
0.02 in - 39 in	5,800 psi	-325 °F +500 °F	—

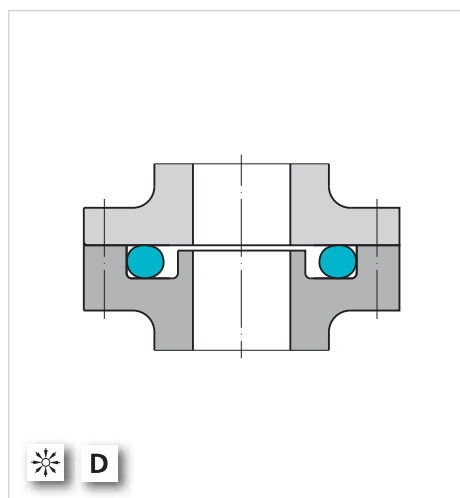

Isolast® Perfluoroelastomer O-Ring

Isolast® is Trelleborg Sealing Solutions proprietary perfluoroelastomer. It combines the elastic properties of fluorocarbon (FKM) with the outstanding chemical resistance and the high temperature stability of PTFE. Isolast® seals can be used for applications in high temperature service up to +325 °C / +615 °F. Isolast® O-Rings are available in metric and inch dimensions to ISO 3601 and AS 568.

Ø Range	Pressure Range	Temperature Range	Velocity
from 0.8 mm	200 MPa	-25 °C +325 °C	—
from 0.031 in	29,000 psi	-10 °F +615 °F	—

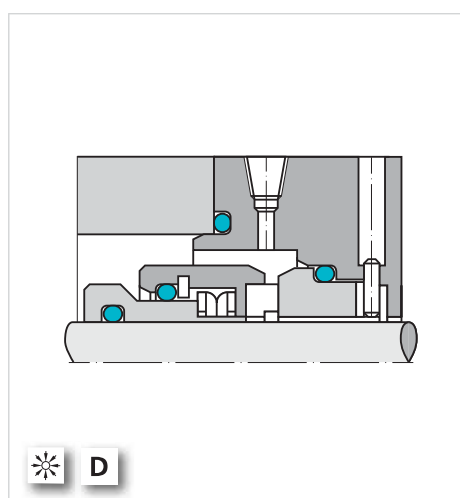


KEY TO APPLICATIONS: Reciprocating = Rotary = Oscillating = Helix = Static = Single-acting = **S** Double-acting = **D**



Zurcon® Dualseal

Zurcon® Dualseal is a sealing element for static applications and a highly effective alternative to an O-Ring and Back-up Ring combination. The main advantages are resistance to twisting, stability at pulsating pressures and low contamination risk. Dualseal is easy to install and guarantees long service life. Recommended for heavy duty applications in cylinders and valves.


Ø Range	Pressure Range	Temperature Range	Velocity
6 - 280 mm	50 MPa	-35 °C +110 °C	—
0.236 in - 11 in	7,250 psi	-30 °F +230 °F	—

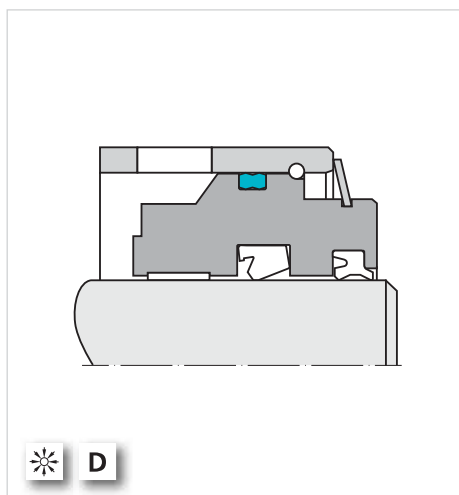

Quad-Ring® Seal

A double-acting four lip seal for static and dynamic applications. Available in a wide range of elastomer compounds. Provides higher seal efficiency and lower friction than conventional O-Rings.


Ø Range	Pressure Range	Temperature Range	Velocity
1 - 660 mm	40 MPa	-30 °C +200 °C	0.5 m/s (up to 2 m/s rotary)
0.039 in - 26 in	5,800 psi	-20 °F +390 °F	1.6 ft/s (up to 6.5 ft/s rotary)

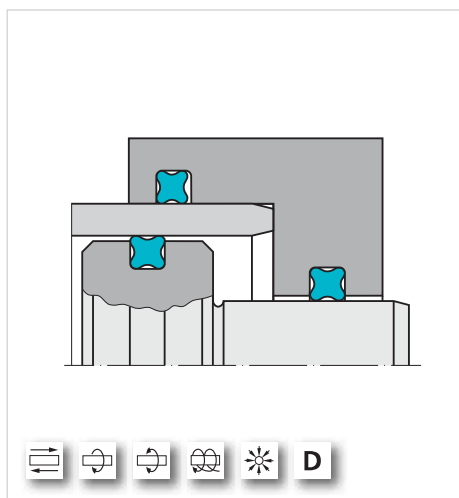

Kantseal

Kantseal is an elastomer square sectioned ring for static applications. Mostly used on flanges to SAE standards and covers, it has a high sealing efficiency and keeps its shape. Available in nitrile (NBR) and fluorocarbon (FKM).

Ø Range	Pressure Range	Temperature Range	Velocity
5 - 456 mm	50 MPa	-30 °C +200 °C	—
0.197 in - 18 in	7,250 psi	-20 °F +390 °F	—

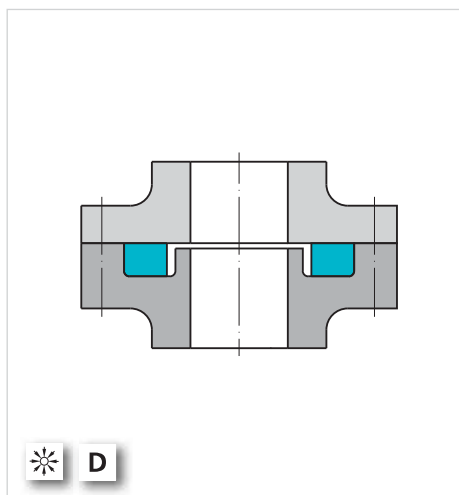


KEY TO APPLICATIONS: Reciprocating = Rotary = Oscillating = Helix = Static = Single-acting = S Double-acting = D



Back-up Ring

Back-up Rings are installed together with O-Rings and Quad-Ring® Seals to prevent gap extrusion in applications above 5 MPa / 725 psi. Available in spiral, cut or uncut designs in filled or unfilled PTFE, Turcon®, elastomers and thermoplastics based on ISO 3601, AS 568.


Ø Range	Pressure Range	Temperature Range	Velocity
from 2.9 mm	250 MPa	-200 °C +260 °C	0.5 m/s
from 0.115 in	36,250 psi	-325 °F +500 °F	1.6 ft/s

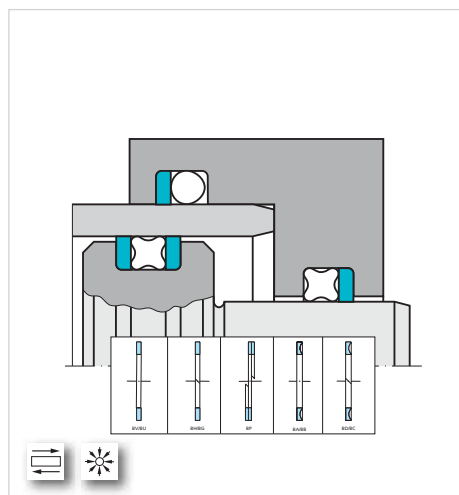

Wills Rings® O

Wills Rings® O are metal O-Rings for static face-sealing applications that give reliable performance over a large temperature range for gases and liquids. Extreme high pressures and vacuums can be sealed with Wills Rings® O. Long life and excellent corrosion resistance are also characteristics of the seals. Available as pressure-filled, pressure-actuated, non-pressurized and solid seals, in mild and stainless steel, copper and Inconel® 600 materials. The seals can be plated in silver or nickel, or PTFE coated.



Ø Range	Pressure Range	Temperature Range	Velocity
8 - 3,000 mm	1,000 MPa	up to +850 °C	—
0.315 in - 118 in	145,000 psi	up to +1,560 °F	—

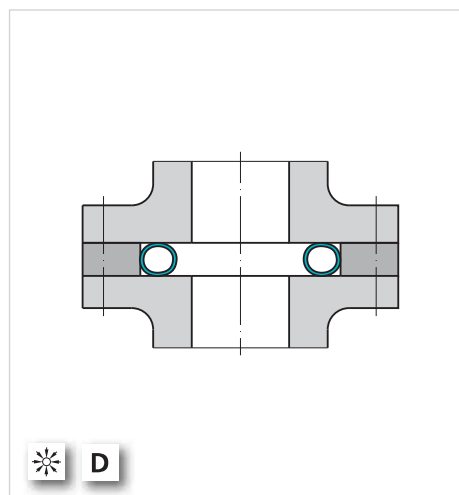

Wills Rings® C

Wills Rings® C are metal C-Rings used for almost any static face sealing applications. They give reliable performance over a large temperature range in liquids and they can also seal high pressures and vacuums. Wills Rings® C exhibits greater spring back and elasticity than Wills Rings® O. This characteristic provides more effective sealing where thermal expansion of the seal housing is found. The seals are available for internal and external seal housing in Inconel® 718 and X750. They can be plated in silver or nickel, or coated with PTFE.

Ø Range	Pressure Range	Temperature Range	Velocity
20 - 500 mm	200 MPa	up to +750 °C	—
0.787 in - 19.5 in	29,000 psi	up to +1,380 °F	—

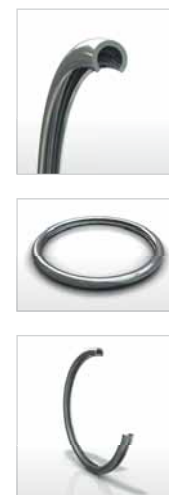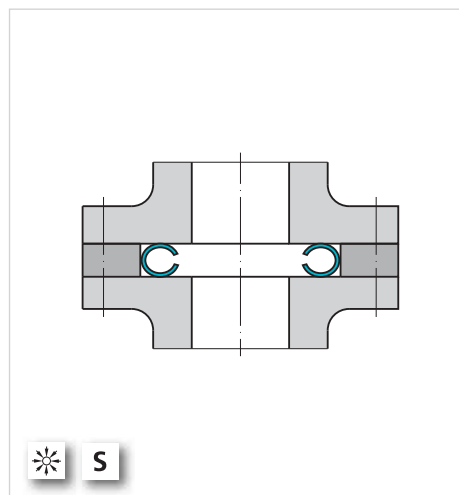


KEY TO APPLICATIONS: Reciprocating = Rotary = Oscillating = Helix = Static = Single-acting = S Double-acting = D



Turcon® Variseal® H

A single-acting sealing element comprised of a U-shaped Turcon® ring and a coiled metallic energizing spring. The seal has a high specific sealing force and gives gas-tight sealing even at low temperatures. Resistant to most liquids and chemicals it has unlimited shelf life. Used for radial static or slightly dynamic applications, the seal is available in versions for cryogenic service.


Ø Range	Pressure Range	Temperature Range	Velocity
3 - 3,300 mm	40 MPa	-100 °C +200 °C	—
0.118 in - 130 in	5,800 psi	-150 °F +390 °F	—

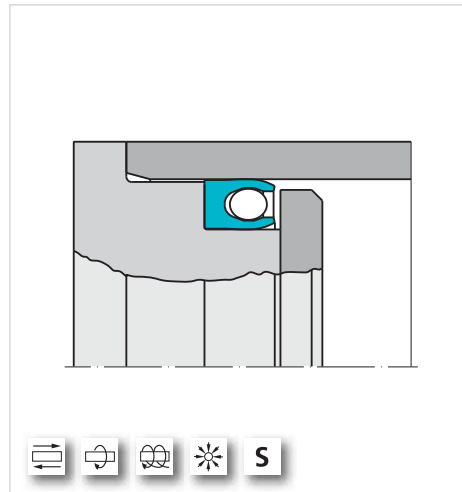

Turcon® Variseal® HF

A single-acting face sealing element comprised of a U-shaped Turcon® ring and a coiled metallic energizing spring. The seal has a high specific sealing force and gives gas-tight sealing even at low temperatures. Resistant to most liquids and chemicals it has unlimited shelf life. Used for inside or outside sealing, the seal is available in versions for cryogenic service.

Ø Range	Pressure Range	Temperature Range	Velocity
3 - 3,300 mm	60 MPa	-150 °C +200 °C	—
0.118 in - 130 in	8,700 psi	-240 °F +390 °F	—

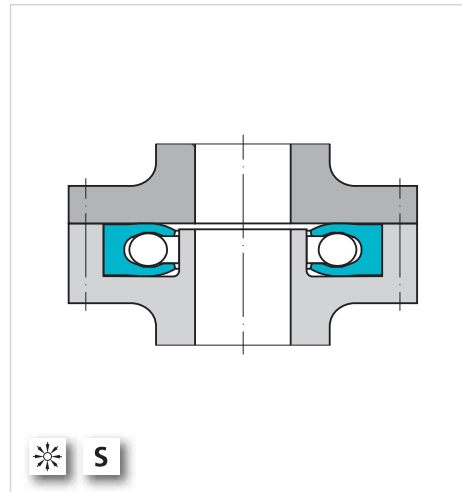


Zurcon® SAE J 518 Flange Seals

SAE Flange Seals corresponding to SAE J 518 are available in three different variants:

- O-Rings (standard material: NBR 90 ShA)
- Rectangle Seals series DR (standard material: NBR 90 ShA)
- Zurcon® SAE-Seals series DRV3 (standard material: Zurcon® Z20 polyurethane 93 ShA)

All SAE Flange Seals provide high functional security and can easily be mounted and dismantled. They are used in a variety of applications including hydraulics, press manufacturing and materials-handling.

Ø Range	Pressure Range	Temperature Range	Velocity
15 - 50 mm	42 MPa	-35 °C +110 °C	—
0.59 in - 2 in	6,000 psi	-30 °F +230 °F	—

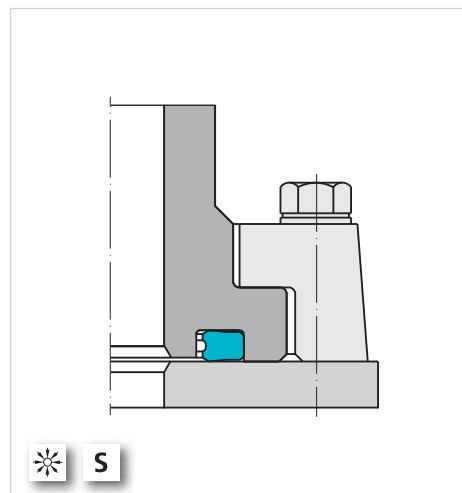


KEY TO APPLICATIONS: Reciprocating = Rotary = Oscillating = Helix = Static = Single-acting = **S** Double-acting = **D**



Bonded Seal

These are sealing discs that seal threads and flange joints. The discs consist of a metallic ring and a rubber sealing pad bonded together. Available in metric and inch dimensions.


Ø Range	Pressure Range	Temperature Range	Velocity
M2.5 - M125	100 MPa	-30 °C +200 °C	—
1/8 in - 2 1/2 in	14,500 psi	-20 °F +390 °F	—

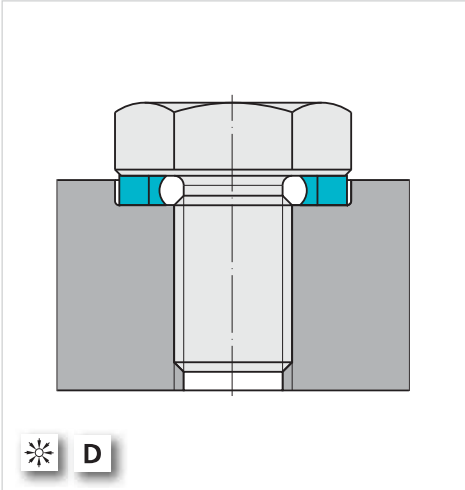

Airseal

Airseal is an inflatable seal, vulcanized to specific customer profiles. Being activated by air, water or other medium, this seal represents an economical alternative to conventional gaskets. The large range of profiles and compounds available allows the use of Airseal in various applications, including doors and locks of autoclaves and sterilizers, in the chemical and semiconductor industries.

Ø Range	Pressure Range	Temperature Range	Velocity
50 - 4,000 mm	1 MPa	-50 °C +220 °C	—
2 in - 157 in	145 psi	-55 °F +430 °F	—

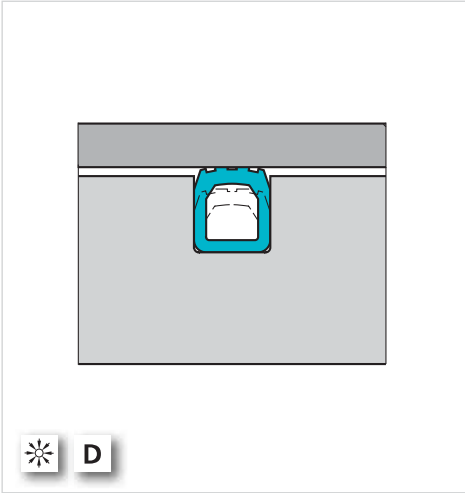


KEY TO APPLICATIONS: Reciprocating = Rotary = Oscillating = Helix = Static = Single-acting = **S** Double-acting = **D**



Turcon® Glyd Ring®

Turcon® Glyd Ring® is a double-acting O-Ring energized piston seal for dynamic applications. Turcon® Glyd Ring® provides low friction with no stick-slip, minimal break out force and high wear resistance. Main application is actuator cylinders. Installed in grooves to ISO 7425.


Ø Range	Pressure Range	Temperature Range	Velocity
8 - 2,700 mm	60 MPa	-45 °C +200 °C	15 m/s
0.315 in - 105 in	8,700 psi	-50 °F +390 °F	50 ft/s

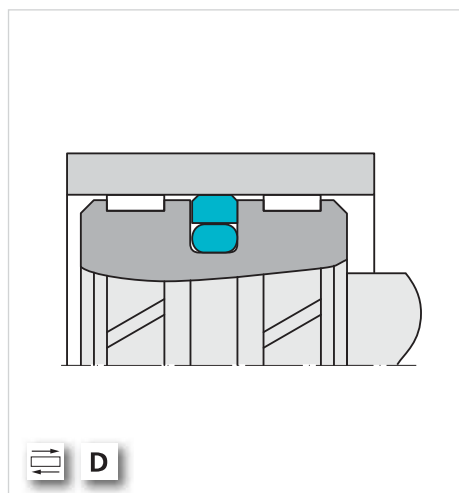

Turcon® Glyd Ring® T

Turcon® Glyd Ring® T provides optimum leakage control and good resistance to extrusion. The seal is a double-acting O-Ring energized piston seal for dynamic applications. Installed in grooves to ISO 7425, it has excellent friction characteristics with no stick-slip, minimal break-out force and high wear resistance.



Ø Range	Pressure Range	Temperature Range	Velocity
8 - 2,700 mm	60 MPa	-45 °C +200 °C	15 m/s
0.315 in - 105 in	8,700 psi	-50 °F +390 °F	50 ft/s

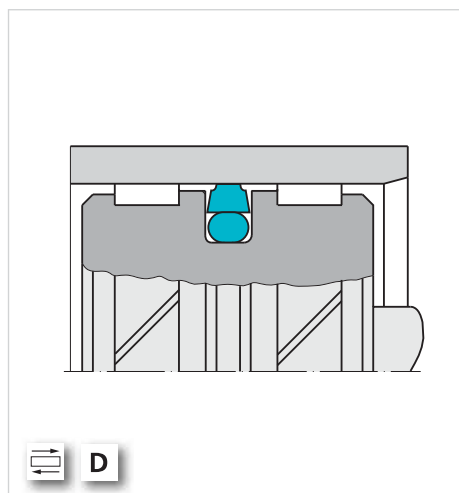

Zurcon® Glyd Ring® P

The double-acting Zurcon® Glyd Ring® P is a combination of a Zurcon® based material slipper-seal with a step cut and an energizing rectangular elastomer ring. The high strength of Zurcon® means there can be a two-times larger extrusion gap compared with Turcon® materials. The step cut in the ring is necessary for installation in closed grooves and to give flexibility to this very stiff material.

Ø Range	Pressure Range	Temperature Range	Velocity
45 - 190 mm	50 MPa	-30 °C +110 °C	1 m/s
1.75 in - 7.5 in	7,250 psi	-20 °F +230 °F	3 ft/s

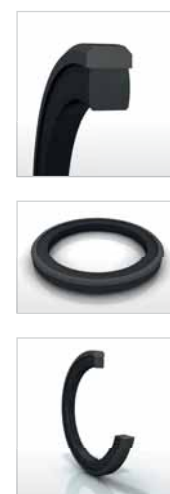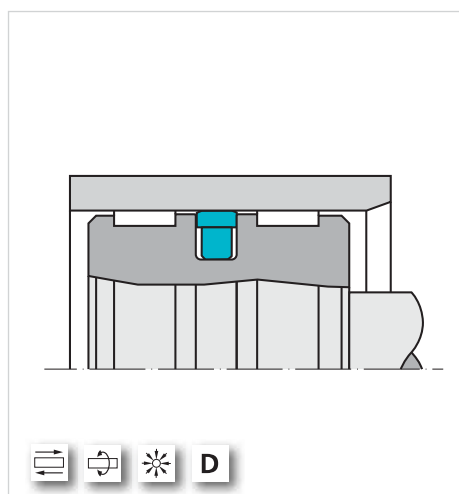


KEY TO APPLICATIONS: Reciprocating = Rotary = Oscillating = Helix = Static = Single-acting = S Double-acting = D



Turcon® Double Delta®

The Turcon® Double Delta® is a double-acting sealing element which is energized by an elastomer O-Ring. The Turcon® Double Delta® seal can be fitted in existing O-Ring grooves (US standard AS 568 A, MIL-P-5514) and it demonstrates good friction properties, stick-slip-free starting and excellent dry-running. The Turcon® Double Delta® is used in light and medium-duty industrial hydraulics.


Ø Range	Pressure Range	Temperature Range	Velocity
4 – 2,700 mm	35 MPa	-45 °C +200 °C	15 m/s
0.157 in – 105 in	5,075 psi	-50 °F +390 °F	50 ft/s

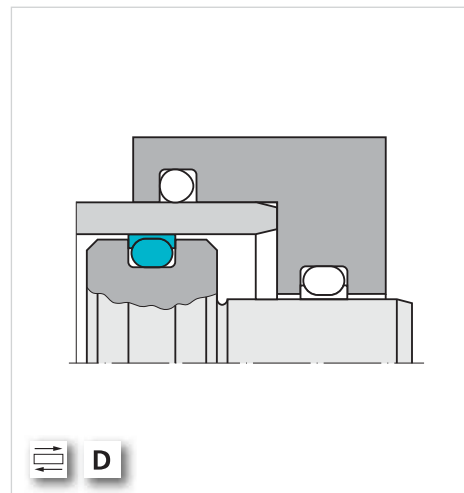

Turcon® AQ Seal®

A double-acting O-Ring energized seal developed for sealing between two media such as fluid and gas. It incorporates a limited footprint Quad-Ring® Seal inset into the dynamic sealing face. Installed in grooves to ISO 7425.


Ø Range	Pressure Range	Temperature Range	Velocity
16 – 700 mm	50 MPa	-45 °C +200 °C	2 m/s
0.625 in – 27.5 in	7,250 psi	-50 °F +390 °F	6.5 ft/s

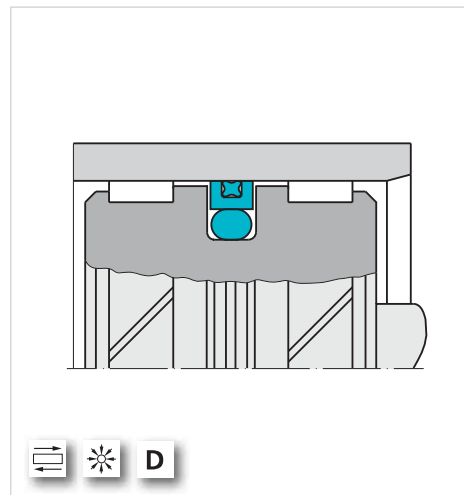

Turcon® AQ Seal® 5

A further development of the standard Turcon® AQ Seal®, the double-acting Turcon® AQ Seal® 5 incorporates an elastomer Quad-Ring® Seal and an elastomer or polyurethane Bean Seal in the dynamic sealing face. It is energized by two O-Rings to improve sealing behavior.

Ø Range	Pressure Range	Temperature Range	Velocity
40 – 700 mm	60 MPa	-45 °C +200 °C	3 m/s
1.5 in – 27.5 in	8,700 psi	-50 °F +390 °F	10 ft/s

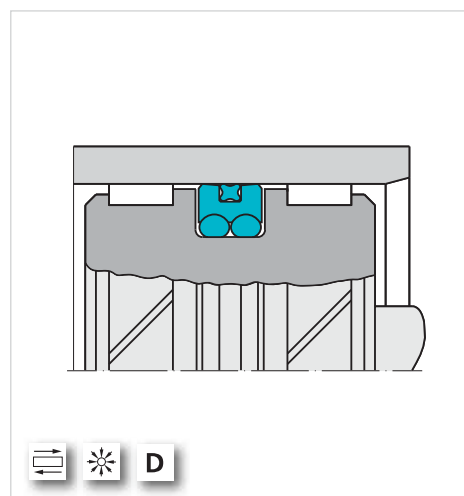


KEY TO APPLICATIONS: Reciprocating = Rotary = Oscillating = Helix = Static = Single-acting = **S** Double-acting = **D**



Turcon® Stepseal® 2K

A single-acting O-Ring energized piston seal for dynamic applications installed in closed grooves, including grooves to ISO 7425. Turcon® Stepseal® 2K offers high sealing efficiency, low friction with no stick-slip, minimal break out force and high wear resistance. Optimum sealing characteristics are achieved by installing in a tandem Turcon® Stepseal® or Rimseal arrangement together with a double-acting scraper. Available in Turcon® or Zurcon® materials.



Ø Range	Pressure Range	Temperature Range	Velocity
8 - 2,700 mm	60 MPa	-45 °C +200 °C	15 m/s
0.315 in - 105 in	8,700 psi	-50 °F +390 °F	50 ft/s

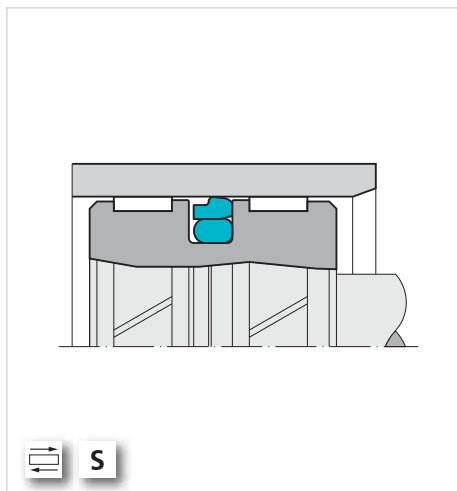

Turcon® Stepseal® V

A single-acting O-Ring energized piston seal with hydrostatic pressure relief channel for dynamic applications. It prevents pressure trapping between seals under all service conditions. Installed in closed grooves, including grooves to ISO 7425, Turcon® Stepseal V offers high sealing efficiency. It also has low friction with no stick-slip, minimal break out force and high wear resistance. Stepseal® V is preferably used with Turcon® or Zurcon® piston seals.


Ø Range	Pressure Range	Temperature Range	Velocity
15 - 2,700 mm	60 MPa	-45 °C +200 °C	15 m/s
0.600 in - 105 in	8,700 psi	-50 °F +390 °F	50 ft/s

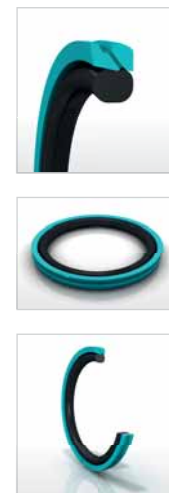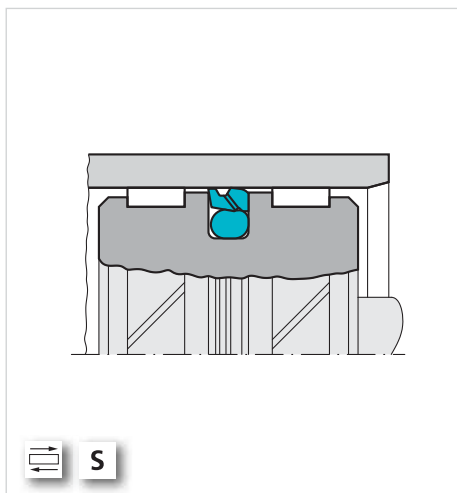

Zurcon® Wynseal

A double-acting O-Ring energized piston seal in injection molded polyurethane for dynamic applications. Installed in grooves to ISO 7425, Zurcon® Wynseal offers high sealing efficiency, and is tear and abrasion resistant.

Ø Range	Pressure Range	Temperature Range	Velocity
16 - 250 mm	40 MPa	-35 °C +110 °C	0.8 m/s
0.625 in - 10 in	5,800 psi	-30 °F +230 °F	2.6 ft/s

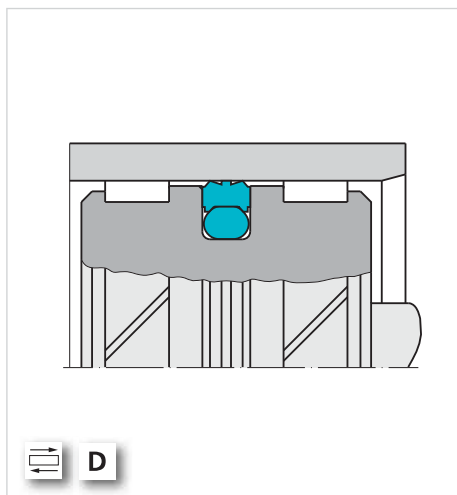


KEY TO APPLICATIONS: Reciprocating = Rotary = Oscillating = Helix = Static = Single-acting = **S** Double-acting = **D**



Zurcon® Wynseal M

A double-acting O-Ring energized piston seal for dynamic applications in a machined version. All diameters up to 2,700 mm / 105 in. Installed in grooves to ISO 7425. High sealing efficiency in tear and abrasion resistant Zurcon® polyurethane. Also available in Turcon® materials.


Ø Range	Pressure Range	Temperature Range	Velocity
8 – 2,700 mm	50 MPa	-45 °C +200 °C	10 m/s
0.315 in – 100 in	7,250 psi	-50 °F +390 °F	33 ft/s

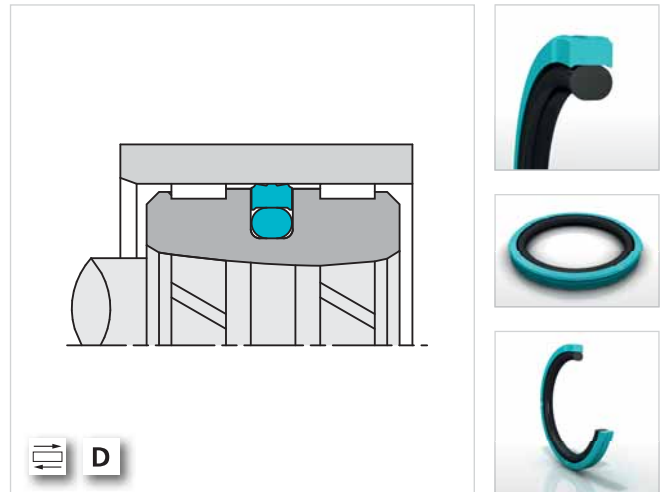

Zurcon® U-Cup

Zurcon® U-Cup is a single-acting polyurethane piston seal that is available in a wide range of sizes. The seal is suitable for assembly into closed grooves and mainly used in light-duty cylinder applications in mobile equipment.


Ø Range	Pressure Range	Temperature Range	Velocity
14 – 250 mm	40 MPa	-35 °C +110 °C	0.5 m/s
0.550 in – 10 in	5,800 psi	-30 °F +230 °F	1.6 ft/s

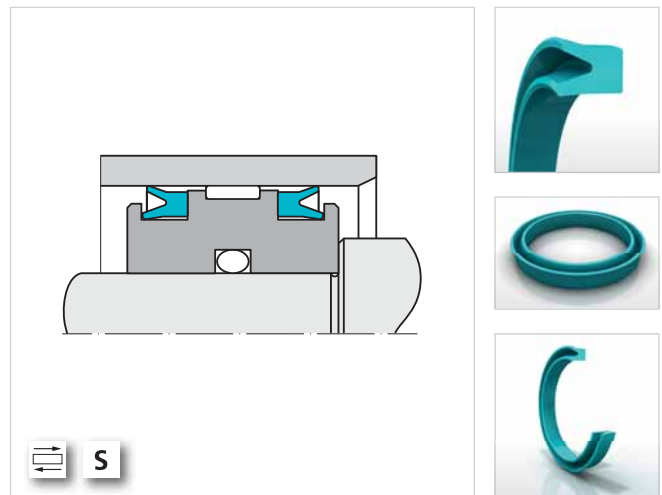

Compact Seal® Polypac DBM®

Double-acting compact piston seal assemblies consisting of an elastomer piston seal, two thermoelastomeric Back-up Rings and two thermoplastic wear rings. They are installed in closed grooves.

Ø Range	Pressure Range	Temperature Range	Velocity
20 – 250 mm	35 MPa	-35 °C +100 °C	0.5 m/s
0.800 in – 10 in	5,075 psi	-30 °F +210 °F	1.6 ft/s

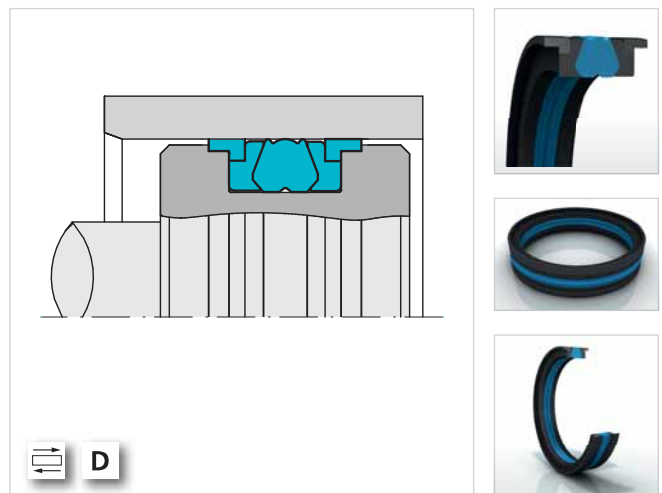


KEY TO APPLICATIONS: Reciprocating = Rotary = Oscillating = Helix = Static = Single-acting = **S** Double-acting = **D**



PHD / CST Seal

A heavy duty compact double-acting piston seal, the PHD / CST Seal is an elastomer energized PTFE assembly. It gives stability, wear resistance, sealability, low friction and a maintenance-free long life. HiMod® Back-up Rings are specially designed to protect the seal ring from extrusion, even in the most demanding applications. Available in metric and inch sizes.

Ø Range	Pressure Range	Temperature Range	Velocity
50 – 180 mm	40 MPa	-45 °C +135 °C	1.5 m/s
2 in – 7 in	5,800 psi	-50 °F +275 °F	5 ft/s

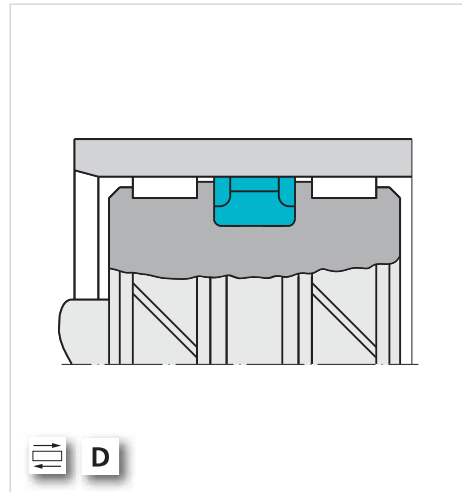


Turcon® Variseal® M2

A single-acting sealing element comprised of a U-shaped Turcon® ring and metallic energizing finger spring. It offers low friction with no stick-slip, minimal break out force and high wear resistance. Resistant to most liquids and chemicals, it has an unlimited shelf life.

Ø Range	Pressure Range	Temperature Range	Velocity
6 – 3,300 mm	D: 20 MPa S: 40 MPa	-70 °C +300 °C	L: 15 m/s R/O/H: 1.3 m/s
0.236 in – 130 in	D: 2,900 psi S: 5,800 psi	-95 °F +570 °F	L: 50 ft/s R/O/H: 4.2 ft/s

S = Static, D = Dynamic, L = Linear, R/O/H = Rotary/Oscillating/Helix

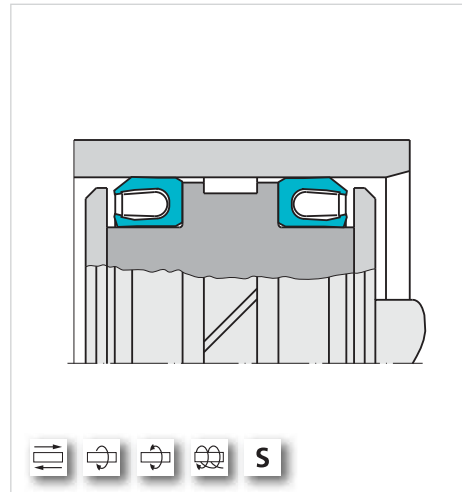


Turcon® Variseal® W2

Turcon® Variseal® W2 is a single-acting rod seal energized by a slantcoil spring. The advantage of the Variseal® W2 lies in its low friction and relatively constant preloading force over a relatively large deformation range. The seal is used wherever friction has to be kept within a narrow tolerance zone, for instance in pressure switches.

Ø Range	Pressure Range	Temperature Range	Velocity
3 – 3,300 mm	D: 20 MPa S: 40 MPa	-70 °C +300 °C	L: 15 m/s R/O/H: 1.3 m/s
0.118 in – 130 in	D: 2,900 psi S: 5,800 psi	-95 °F +570 °F	L: 50 ft/s R/O/H: 4.2 ft/s

S = Static, D = Dynamic, L = Linear, R/O/H = Rotary/Oscillating/Helix

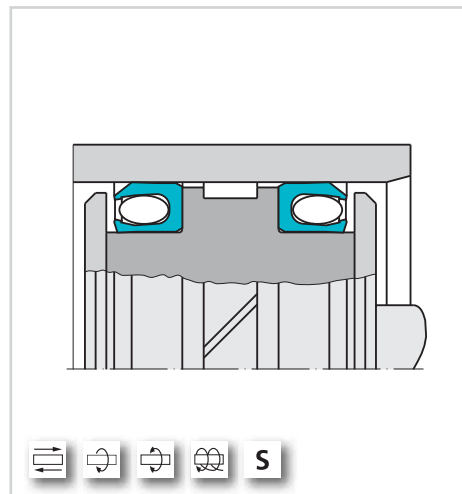


KEY TO APPLICATIONS: Reciprocating = Rotary = Oscillating = Helix = Static = Single-acting = **S** Double-acting = **D**



Turcon® VL Seal®

The Turcon® VL Seal® is a single-acting L-shaped Turcon® seal with an elastic energizer for dynamic applications. Its design provides low friction, no stick-slip effect, high wear resistance. It features the Turcon® Stepseal® back pumping effect and is also available in Zurcon®. The seal can be installed in a standard O-Ring groove.

Ø Range	Pressure Range	Temperature Range	Velocity
10 – 2,700 mm	60 MPa	-45 °C +200 °C	15 m/s
0.400 in – 105 in	8,700 psi	-50 °F +390 °F	50 ft/s

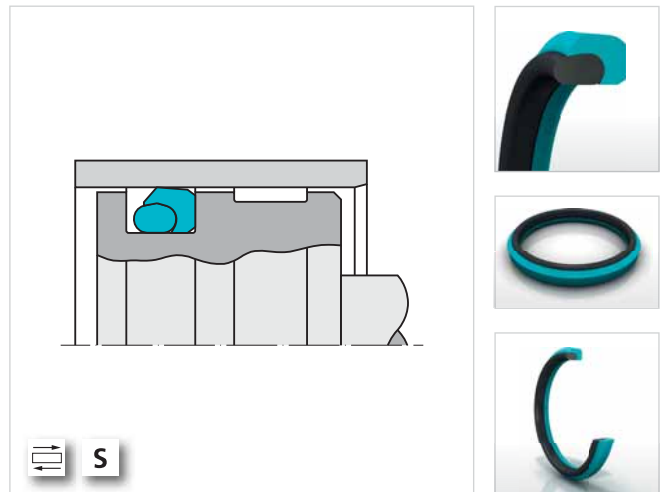

VEEPAC

VEEPAC is an assembly of fabric-reinforced, highly wear resistant, chevron sealing rings with a support ring and a pressure energizing ring. VEEPAC seals are designed with preloaded radial lips to provide good sealing results. They are very robust, not sensitive to sealing surface finish and dimensionally adjustable. They are especially suited to applications where there is a risk of damage and contamination.


Ø Range	Pressure Range	Temperature Range	Velocity
40 – 250 mm	40 MPa	-30 °C +200 °C	0.5 m/s
1.5 in – 10 in	5,800 psi	-20 °F +390 °F	1.6 ft/s



Selemaster DSM

A double-acting compact piston seal with an integrated Back-up Ring and guide ring. The multi-lip elastomer seal element is backed on both sides with fiber-reinforced profile rings. Recommended for high pressure applications and where vibration occurs.

Ø Range	Pressure Range	Temperature Range	Velocity
45 – 360 mm	70 MPa	-40 °C +130 °C	0.5 m/s
1.75 in – 14 in	10,150 psi	-40 °F +270 °F	1.6 ft/s

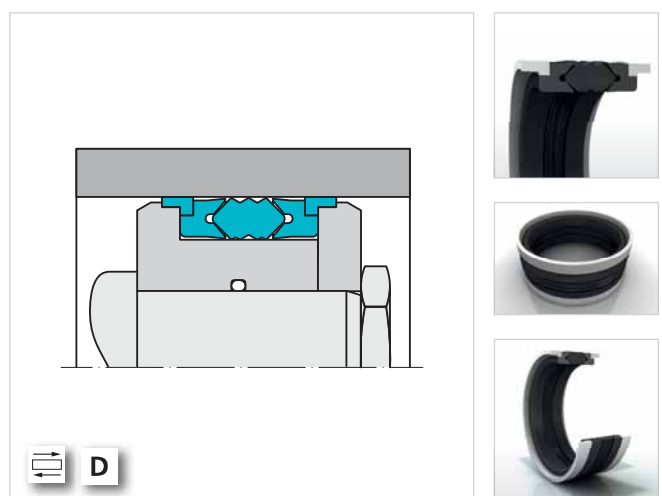


KEY TO APPLICATIONS: Reciprocating = Rotary = Oscillating = Helix = Static = Single-acting = **S** Double-acting = **D**



Turcon® Stepseal® 2K

A single-acting, O-Ring energized rod seal for dynamic applications, Turcon® Stepseal® 2K can be installed in closed grooves including grooves to ISO 7425. It offers high sealing efficiency, low friction with no stick-slip, minimal break out force and high wear resistance. Optimum sealing characteristics are achieved by installing in a tandem Turcon® Stepseal® or Rimseal arrangement together with a double-acting scraper. Available in Turcon® or Zurcon® materials.


Ø Range	Pressure Range	Temperature Range	Velocity
3 – 2,600 mm	60 MPa	-45 °C +200 °C	15 m/s
0.120 in – 102 in	8,700 psi	-50 °F +390 °F	50 ft/s

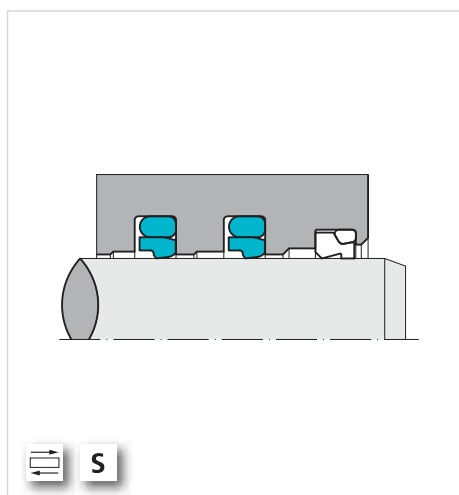

Turcon® Stepseal® V

A single-acting, O-Ring energized rod seal with hydrostatic pressure relief channel for dynamic applications. Prevents pressure trap between seals under all service conditions. Installed in closed grooves including grooves to ISO 7425, Turcon® Stepseal V offers high sealing efficiency. It also gives, low friction with no stick-slip, minimal break out force and high wear resistance. Stepseal® V is preferably used together with a secondary seal from the range of Turcon® and Zurcon® rod seals, together with a double-acting Excluder® or Scraper.



Ø Range	Pressure Range	Temperature Range	Velocity
12 – 2,600 mm	60 MPa	-45 °C +200 °C	15 m/s
0.500 in – 102 in	8,700 psi	-50 °F +390 °F	50 ft/s

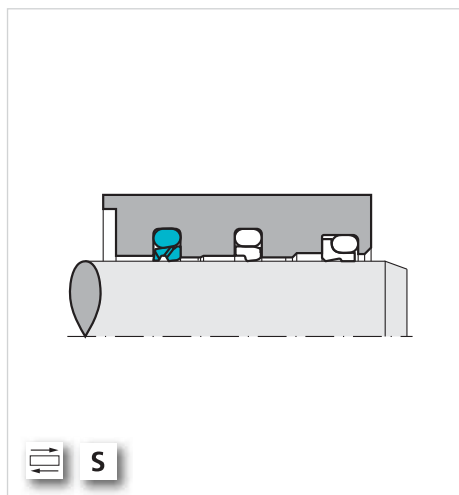

Zurcon® Rimseal

Zurcon® Rimseal is a single-acting rod seal energized by an elastomer O-Ring and it has a high static and dynamic tightness. The installation spaces are identical to those used for the Turcon® Stepseal® 2K, making the Zurcon® Rimseal an ideal secondary system element. The main application fields are rod seals with redundant sealing systems and double wipers in mobile hydraulics, machine tools, injection molding machines and in general machine construction.

Range Ø	Pressure Range	Temperature Range	Velocity
8 – 2,200 mm	60 MPa (in tandem)	-45 °C +110 °C	5 m/s (in tandem)
0.315 in – 87 in	8,700 psi (in tandem)	-50 °F +230 °F	16 ft/s (in tandem)

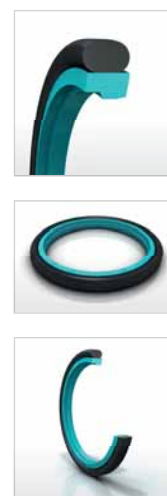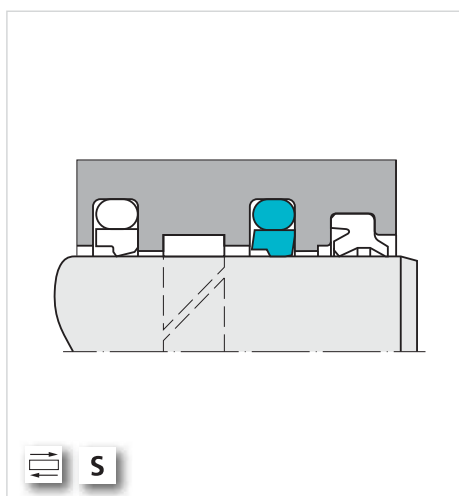


KEY TO APPLICATIONS: Reciprocating = Rotary = Oscillating = Helix = Static = Single-acting = S Double-acting = D



Zurcon® U-Cup RU9

Rod seals are particularly exposed to pressure and friction and a long service life is a specific requirement of piston rods. Zurcon® U-Cup RU9 can offer this with its outstanding wear and extrusion resistance. It is also compatible with virtually all media, has a wide operating temperature range, and gives low friction. It has compact installation dimensions and is easy to assemble.


Ø Range	Pressure Range	Temperature Range	Velocity
6 – 140 mm	40 MPa	-35 °C +110 °C	0.5 m/s
0.375 in – 8 in	5,800 psi	-30 °F +230 °F	1.6 ft/s

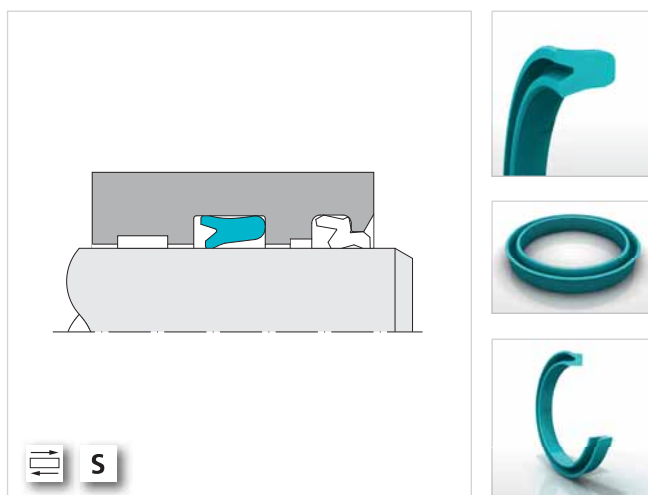

Zurcon® Buffer Seal

In heavy-duty applications, leak-free performance and good service life cannot be assured by a single sealing element; therefore, specially developed "system seals" are arranged in series, building a "tandem configuration". The single-acting Zurcon® Buffer Seal is designed as a heavy-duty primary rod seal. The design of the product incorporates a combination of a Zurcon® sealing ring along with a Back-up Ring.


Ø Range	Pressure Range	Temperature Range	Velocity
40 – 140 mm	40 MPa	-35 °C +110 °C	1 m/s
2 in – 8 in	5,800 psi	-30 °F +230 °F	3.2 ft/s

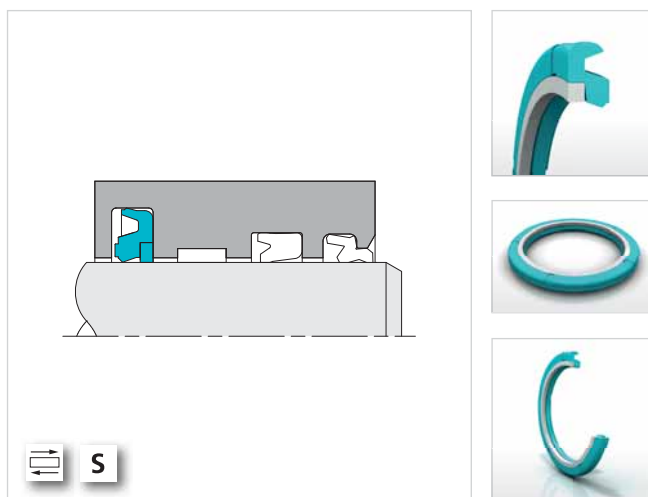

Balsele

A single-acting compact seal comprised of an elastomer sealing lip, supported by a fiber-reinforced back with optional integrated plastic Back-up Ring for high pressure applications. Recommended for use in standard hydraulic cylinders, presses and mobile hydraulics.

Ø Range	Pressure Range	Temperature Range	Velocity
10 – 1,200 mm	40 MPa	-30 °C +130 °C	0.5 m/s
0.394 in – 47 in	5,800 psi	-20 °F +270 °F	1.6 ft/s

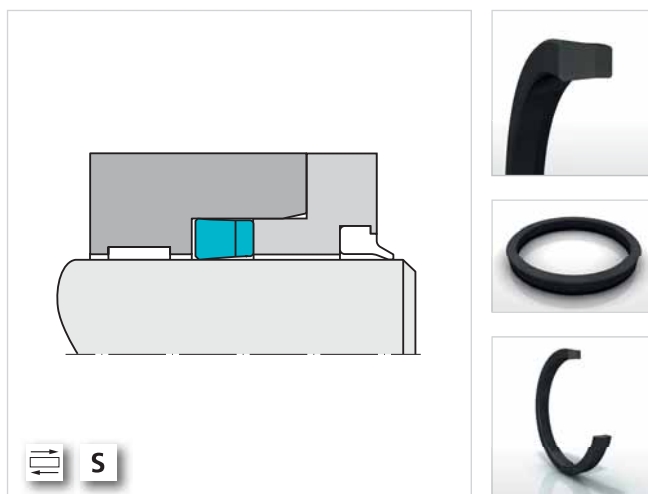


KEY TO APPLICATIONS: Reciprocating = Rotary = Oscillating = Helix = Static = Single-acting = **S** Double-acting = **D**



Zurcon® L-Cup®

A single-acting rod seal, Zurcon® L-Cup® is an alternative to the U-Cup. It is a highly effective sealing system offering optimized sealing performance and extended service life. With exceptionally low friction properties, it has high wear resistance, back pumping ability along with high static and dynamic tightness.

Ø Range	Pressure Range	Temperature Range	Velocity
8 - 270 mm	40 MPa	-35 °C +110 °C	0.5 m/s
0.315 in - 10.5 in	5,800 psi	-30 °F +230 °F	1.6 ft/s

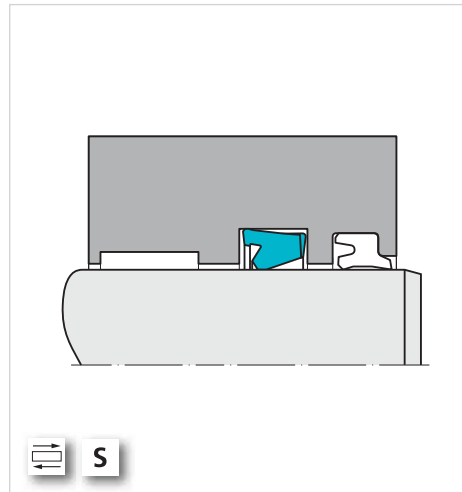


Turcon® Variseal® M2

A single-acting sealing element comprised of a U-shaped Turcon® ring and metallic energizing finger spring. It offers low friction with no stick-slip, minimal break out force and high wear resistance. Resistant to most liquids and chemicals, it has unlimited shelf life.

Ø Range	Pressure Range	Temperature Range	Velocity
3 - 3,300 mm	S: 40 MPa D: 20 MPa	-70 °C +300 °C	L: 15 m/s R/O/H: 1.3 m/s
0.118 in - 130 in	S: 5,800 psi D: 2,900 psi	-95 °F +570 °F	L: 50 ft/s R/O/H: 4.2 ft/s

S = Static, D = Dynamic, L = Linear, R/O/H = Rotary/Oscillating/Helix

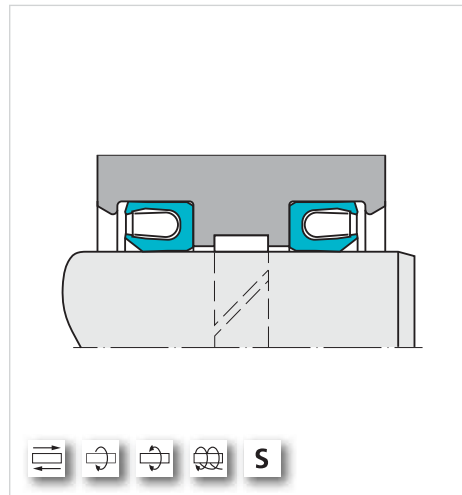


Turcon® Variseal® W2

Turcon® Variseal® W2 is a single-acting rod seal energized by a special Slantcoil® spring. The advantage of the Variseal® W2 lies in its low friction and relatively constant preloading force over a relatively large deformation range. The seal is used wherever friction has to be kept within a narrow tolerance zone, for instance in pressure switches.

Ø Range	Pressure Range	Temperature Range	Velocity
3 - 3,300 mm	S: 40 MPa D: 20 MPa	-70 °C +300 °C	L: 15 m/s R/O/H: 1.3 m/s
0.118 in - 130 in	S: 5,800 psi D: 2,900 psi	-95 °F +570 °F	L: 50 ft/s R/O/H: 4.2 ft/s

S = Static, D = Dynamic, L = Linear, R/O/H = Rotary/Oscillating/Helix

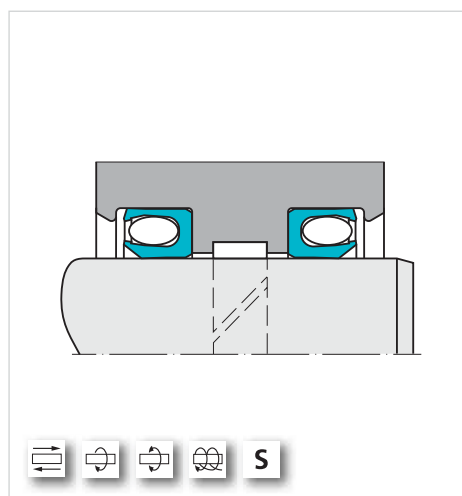


KEY TO APPLICATIONS: Reciprocating = Rotary = Oscillating = Helix = Static = Single-acting = **S** Double-acting = **D**



Turcon® VL Seal®

A single-acting L-shaped Turcon® seal with an elastomer energizer for dynamic applications. The design provides low friction, no stick-slip, high wear resistance and features the Turcon® Stepseal® back pumping effect. Available in Turcon® and Zurcon® materials. Installed in standard O-Ring groove.


Ø Range	Pressure Range	Temperature Range	Velocity
6 – 2,600 mm	60 MPa	-45 °C +200 °C	15 m/s
0.236 in – 102 in	8,700 psi	-50 °F +390 °F	50 ft/s

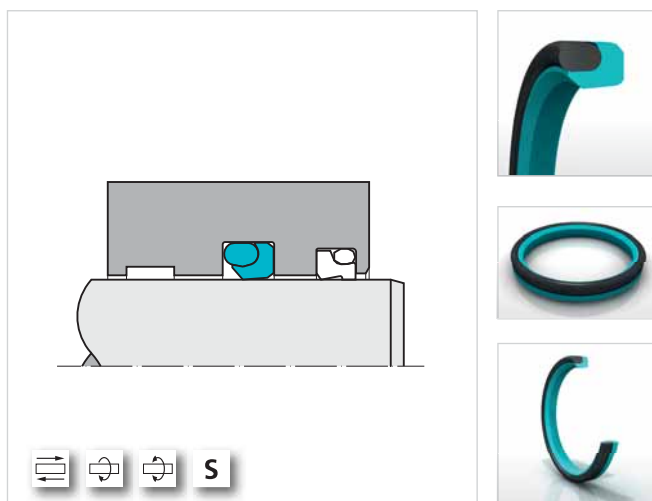

Turcon® Glyd Ring®

Turcon® Glyd Ring® is a double-acting O-Ring energized rod seal for dynamic applications. It provides low friction with no stick-slip, minimal break out force and high wear resistance. Installed in grooves to ISO 7425.


Ø Range	Pressure Range	Temperature Range	Velocity
3 – 2,600 mm	60 MPa	-45 °C +200 °C	15 m/s
0.118 in – 102 in	8,700 psi	-50 °F +390 °F	50 ft/s

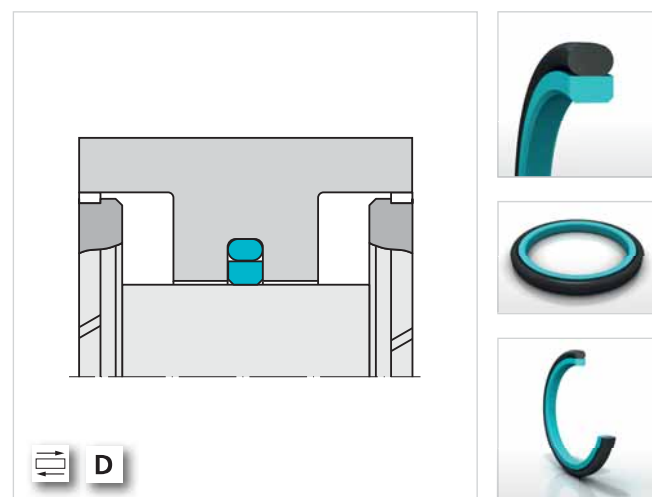

Turcon® Glyd Ring® T

A further development of the Turcon® Glyd Ring® T provides improved leakage control and better resistance to extrusion. It is a double-acting O-Ring energized rod seal for dynamic applications that can be installed in grooves to ISO 7425. It offers low friction with no stick-slip, minimal break out force and high wear resistance.

Ø Range	Pressure Range	Temperature Range	Velocity
3 – 2,600 mm	60 MPa	-45 °C +200 °C	15 m/s
0.118 in – 102 in	8,700 psi	-50 °F +390 °F	50 ft/s

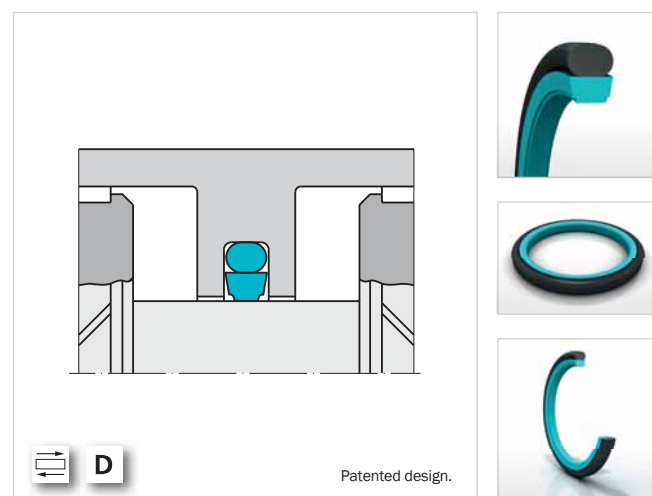



KEY TO APPLICATIONS: Reciprocating = Rotary = Oscillating = Helix = Static = Single-acting = **S** Double-acting = **D**



Turcon® AQ Seal® with Bean Seal

A double-acting O-Ring energized seal developed for sealing between two media such as fluid and gas. It incorporates a limited footprint polyurethane Bean Seal inset into the dynamic sealing face. Installed in grooves to ISO 7425.


Ø Range	Pressure Range	Temperature Range	Velocity
18 – 2,200 mm	50 MPa	-45 °C +110 °C	2 m/s
0.725 in – 87 in	7,250 psi	-50 °F +230 °F	6.5 ft/s

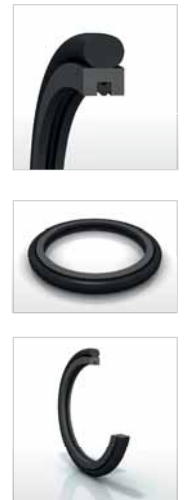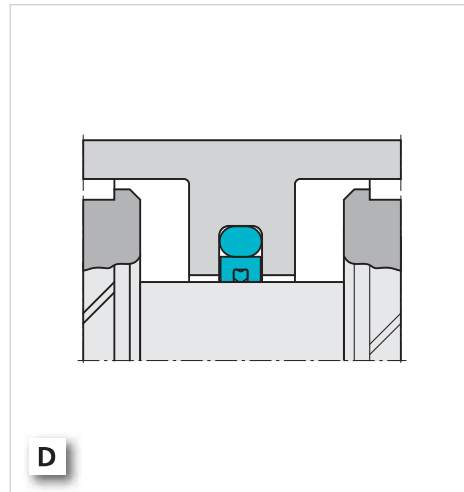

Turcon® AQ Seal® 5 with Bean Seal

A further development of the standard Turcon® AQ Seal® double-acting seal with a polyurethane Bean Seal in the dynamic sealing face. It is energized by two O-Rings to improve sealing behavior.


Ø Range	Pressure Range	Temperature Range	Velocity
32 – 2,200 mm	60 MPa	-45 °C +110 °C	3 m/s
1.275 in – 87 in	8,700 psi	-50 °F +230 °F	10 ft/s

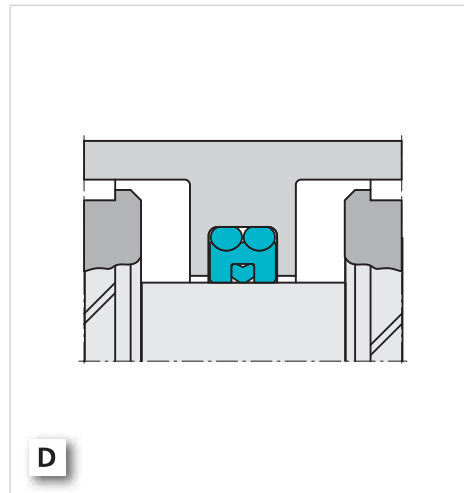

Zurcon® Wynseal M

A double-acting O-Ring energized rod seal for dynamic applications in a machined version for all diameters up to 2,600 mm / 102 in. It can be installed in grooves to ISO 7425 and provides high sealing efficiency in tear and abrasion resistant Zurcon® polyurethane. Also available in Turcon® materials.

Ø Range	Pressure Range	Temperature Range	Velocity
3 – 2,600 mm	50 MPa	-45 °C +200 °C	10 m/s
0.120 in – 102 in	7,250 psi	-50 °F +390 °F	33 ft/s

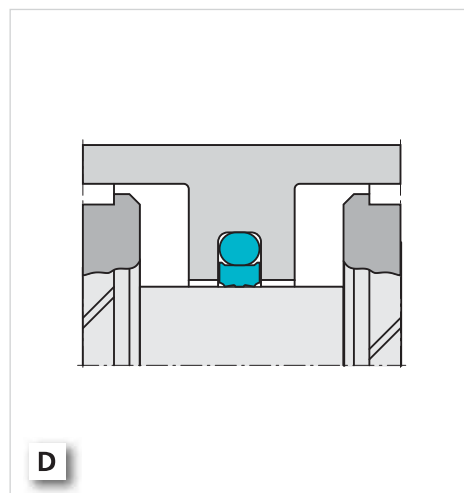


KEY TO APPLICATIONS: Reciprocating = Rotary = Oscillating = Helix = Static = Single-acting = S Double-acting = D



Turcon® Double Delta®

The Turcon® Double Delta® is a double-acting sealing element which is energized by an elastomer O-Ring. The Turcon® Double Delta® seal can be fitted in existing O-Ring grooves (US standard AS 568 A, MIL-P-5514) and demonstrates good friction properties, stick-slip free starting and excellent dry-running. The Turcon® Double Delta® is used in light and medium-duty industrial hydraulics.


Ø Range	Pressure Range	Temperature Range	Velocity
2 - 1,000 mm	35 MPa	-45 °C +200 °C	15 m/s
0.080 in - 39 in	5,000 psi	-50 °F +390 °F	50 ft/s

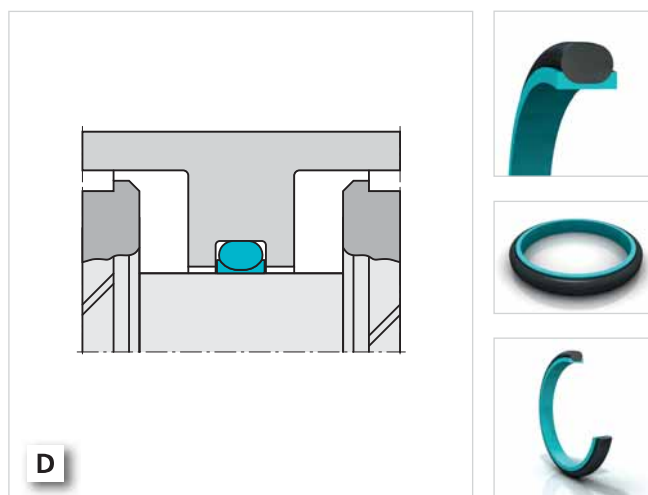

VEEPAC

VEEPAC is an assembly of fabric-reinforced, highly wear resistant, chevron sealing rings with a support ring and a pressure energizing ring. VEEPAC seals are designed with preloaded radial lips to provide good sealing results. They are very robust, insensitive to sealing surface finish and dimensionally adjustable. They are especially suited to applications where there is a risk of damage and contamination.


Ø Range	Pressure Range	Temperature Range	Velocity
10 - 700 mm	40 MPa	-30 °C +200 °C	0.5 m/s
0.394 in - 28 in	5,800 psi	-20 °F +390 °F	1.6 ft/s

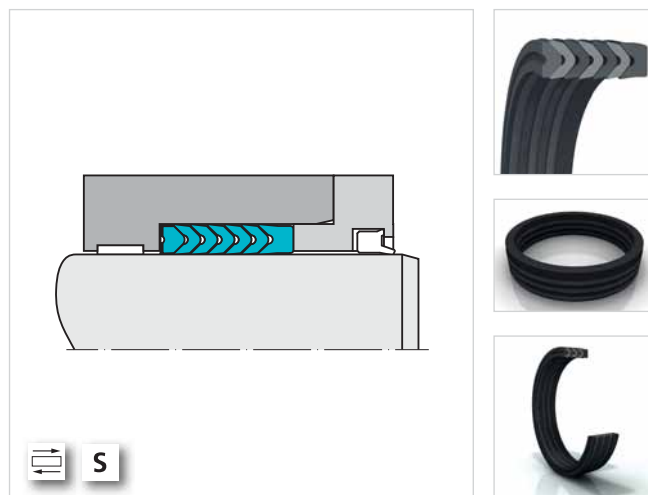

Selemaster SM

Compact rod seal designed for VEEPAC grooves and high pressure applications. The multi-lip elastomer sealing element is supported by a fiber-reinforced back with an integrated Back-up Ring.

Ø Range	Pressure Range	Temperature Range	Velocity
27 - 360 mm	70 MPa	-40 °C +130 °C	0.5 m/s
1.06 in - 14 in	10,150 psi	-40 °F +270 °F	1.6 ft/s

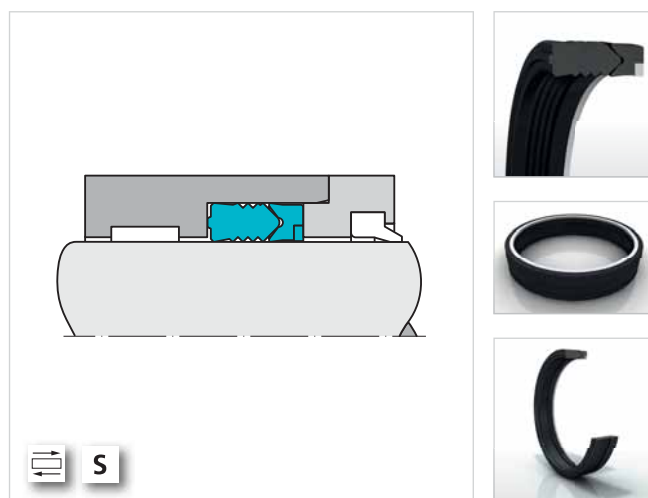


KEY TO APPLICATIONS: Reciprocating = Rotary = Oscillating = Helix = Static = Single-acting = S Double-acting = D



Turcon® Excluder® 2

A double-acting O-Ring energized scraper that prevents the ingress of mud or other contaminants, increasing effective system service life. It has a secondary sealing capability for use with back pumping performance seals such as Turcon® Stepseal® 2K and Zurcon® Rimseal.


Ø Range	Temperature Range	Velocity
6 – 2,600 mm	-45 °C +200 °C	15 m/s
0.236 in – 102 in	-50 °F +390 °F	50 ft/s

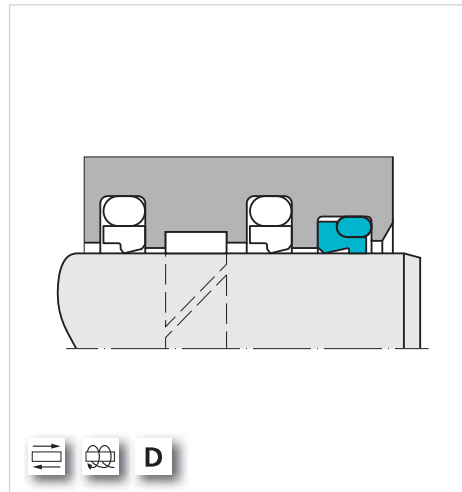

Turcon® Excluder® 5

A double-acting O-Ring energized scraper which prevents the ingress of mud or other contaminants, increasing effective system service life. It has a secondary sealing capability for use with back pumping performance seals such as Turcon® Stepseal® 2K and Zurcon® Rimseal. It is ideal for heavy duty mobile hydraulics applications. Primarily available in Turcon® or Zurcon® materials.


Ø Range	Temperature Range	Velocity
20 – 2,600 mm	-45 °C +200 °C	15 m/s
0.787 in – 102 in	-50 °F +390 °F	50 ft/s

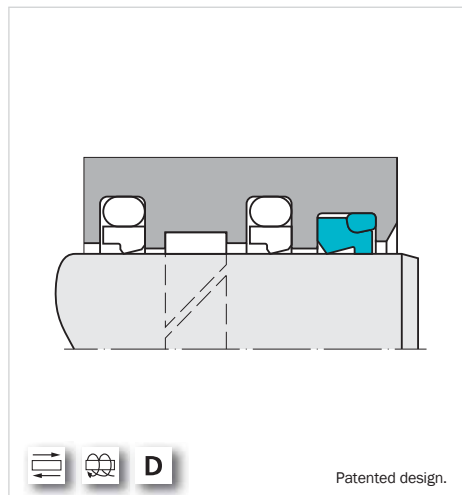

Turcon® Excluder® F

Double-acting O-Ring energized scraper which prevents the ingress of mud or other contaminants to increase effective system service life. Used in light and medium-duty industrial hydraulics. Offers easy installation in small diameters. Secondary sealing capability for use with back pumping performance seals such as Turcon® Stepseal® 2K and Zurcon® Rimseal. Available in Turcon® or Zurcon® materials.

Ø Range	Temperature Range	Velocity
19 – 1,000 mm	-45 °C +200 °C	15 m/s
0.750 in – 39 in	-50 °F +390 °F	50 ft/s

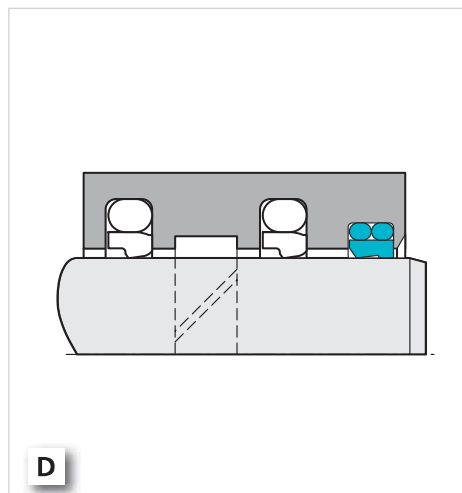


KEY TO APPLICATIONS: Reciprocating = Rotary = Oscillating = Helix = Static = Single-acting = S Double-acting = D



Turcon® Excluder® G

Double-acting O-Ring energized scraper which prevents the ingress of mud or other contaminants to increase effective system service life. Advanced scraping lip prevents dirt from being trapped in front of the scraper element. Used in medium to heavy duty hydraulics. Secondary sealing capability for use with back pumping performance seals such as Turcon® Stepseal® 2K and Zurcon® Rimseal. Available in Turcon® or Zurcon® materials.


Ø Range	Temperature Range	Velocity
100 – 1.000 mm	-45 °C +200 °C	5 m/s
4 in – 39 in	-50 °F +390 °F	16 ft/s

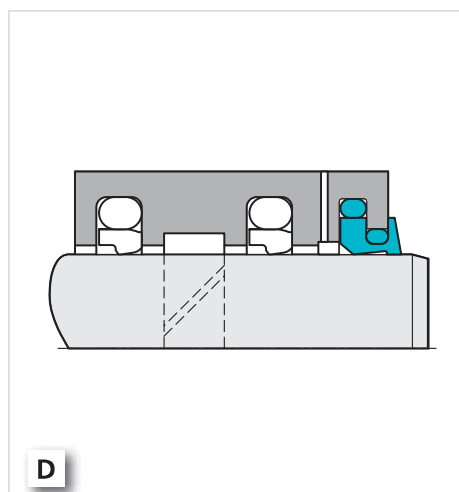

Zurcon® Scraper DA22

A double-acting scraper with a sealing and scraping lip in injection molded polyurethane that can be installed in grooves to ISO 6195 type C. For applications in conjunction with seals that give back pumping performance, such as Turcon® Stepseal® 2K and Zurcon® Rimseal.


Ø Range	Temperature Range	Velocity
5 – 180 mm	-35 °C +100 °C	1 m/s
0.197 in – 7 in	-30 °F +210 °F	3 ft/s

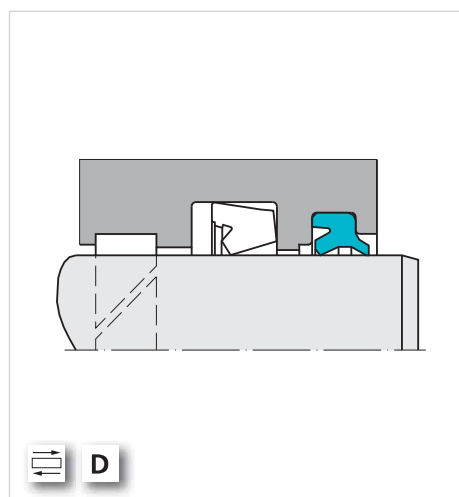

Zurcon® Scraper DA24

The Zurcon® Scraper DA24 is a double-acting polyurethane scraper for severe operating conditions and heavy dirt attack. It is especially suitable for construction machinery and mobile hydraulics. It can be used where there is side pressure on the piston rod.

Ø Range	Temperature Range	Velocity
45 – 290 mm	-35 °C +100 °C	0.5 m/s
1.6 in – 11 in	-30 °F +210 °F	1.6 ft/s

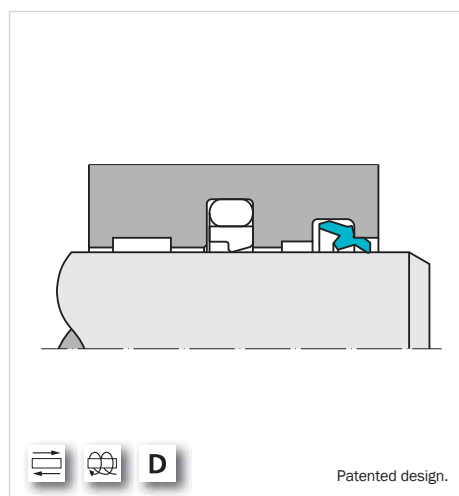

Patented design.


KEY TO APPLICATIONS: Reciprocating = Rotary = Oscillating = Helix = Static = Single-acting = S Double-acting = D



Scraper DA17

A double-acting scraper with both a sealing and a scraping lip in NBR. For applications in conjunction with seals that give back pumping performance, such as Turcon® Stepseal® 2K and Zurcon® Rimseal.


Ø Range	Temperature Range	Velocity
10 – 440 mm	-30 °C +100 °C	1 m/s
0.394 in – 17 in	-20 °F +210 °F	3 ft/s

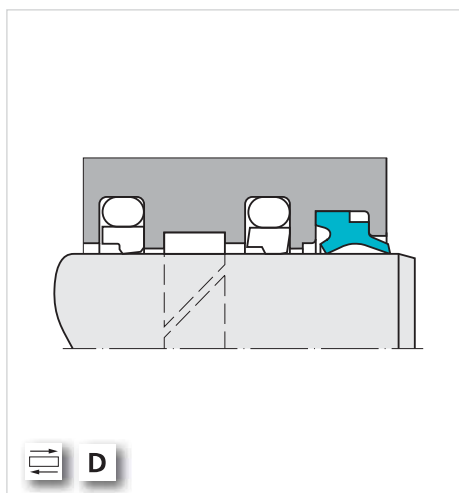

Scraper DA27

The double-acting rubber scraper DA27 is designed for large diameter hydraulic applications. With its "heavy" cross section it is a natural extension of scraper DA17 for diameters over 400 mm / 15.75 in. The DA27 scraper is produced by vulcanizing the required diameter from a 600 mm / 24 in master mold.


Ø Range	Temperature Range	Velocity
400 – 2,600 mm	-30 °C +100 °C	1 m/s
15.75 in – 102 in	-20 °F +210 °F	3 ft/s

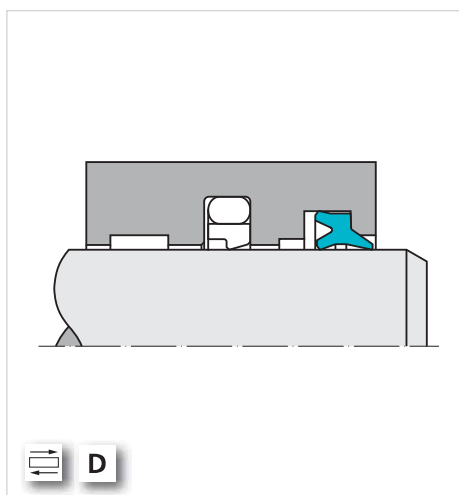

Zurcon® Scraper ASW

Injection molded polyurethane scraper with one scraping lip and inner support bead that gives improved seating in the groove. It has good abrasion and tear resistance.

Ø Range	Temperature Range	Velocity
8 – 125 mm	-35 °C +110 °C	1 m/s
0.315 in – 5 in	-30 °F +210 °F	3 ft/s

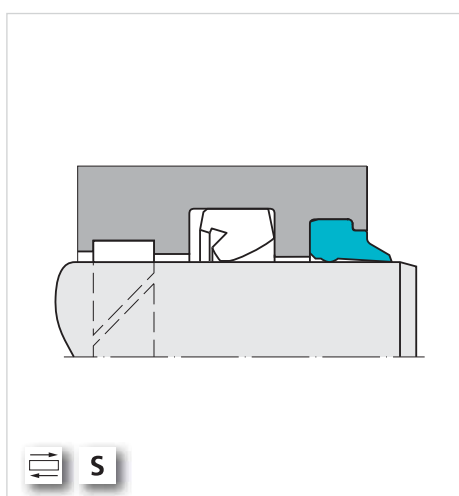


KEY TO APPLICATIONS: Reciprocating = Rotary = Oscillating = Helix = Static = Single-acting = S Double-acting = D



Scraper SA

Metal caged scraper with an NBR lip. For installation in open grooves including grooves to ISO 6195 Type B.

Ø Range	Temperature Range	Velocity
6 - 270 mm	-30 °C +110 °C	1 m/s
0.236 in - 10.5 in	-20 °F +230 °F	3 ft/s

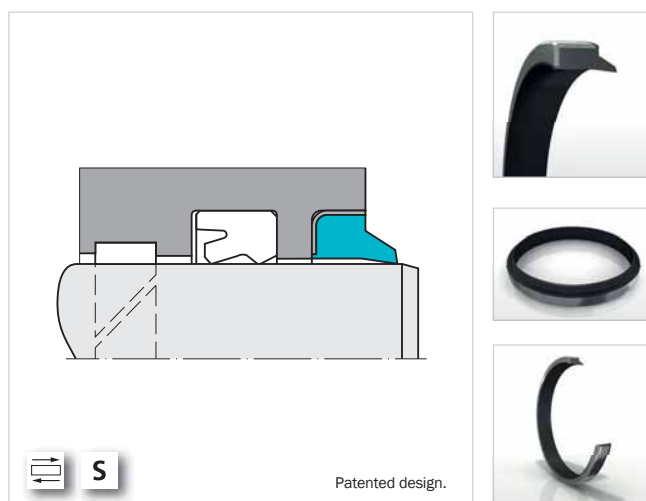

Scraper WRM

Scraper WRM is a single-acting, heat-molded elastomer scraper. It possesses a comb-profile sealing surface on its outer diameter which guarantees a firm seat in the groove. It is easy to install in closed grooves.


Ø Range	Temperature Range	Velocity
12 - 260 mm	-30 °C +110 °C	1 m/s
0.472 in - 10.25 in	-20 °F +230 °F	3 ft/s



Metal Scraper

Metal scraper consists of a thin spring brass scraper lip in tandem with an NBR wiping lip encased in a steel shell. It is capable of removing dried or frozen mud, tar, ice and other contaminants from the rod. Also available in Stainless Steel with an FKM wiper lip.

Ø Range	Temperature Range	Velocity
12 - 220 mm	-40 °C +120 °C	1 m/s
0.472 in - 8.5 in	-40 °F +250 °F	3 ft/s

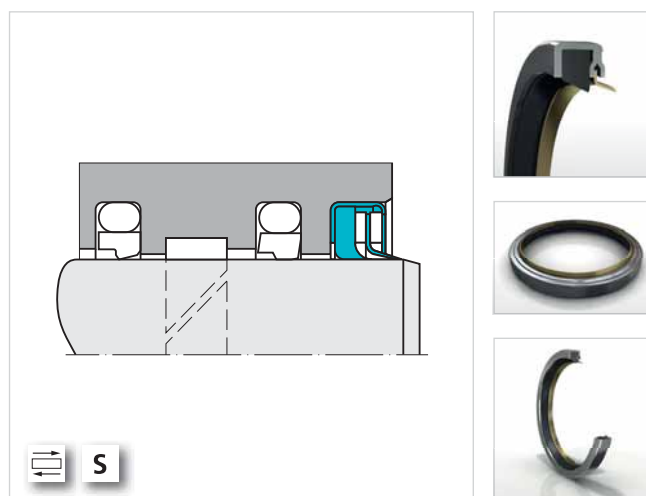


KEY TO APPLICATIONS: Reciprocating = Rotary = Oscillating = Helix = Static = Single-acting = S Double-acting = D



Zurcon® Scraper WNE

A single-acting polyurethane scraper with a static sealing lip to prevent any water or dirt ingress into the sealing groove. It is recommended for applications in mobile hydraulics and agricultural machinery.


Ø Range	Temperature Range	Velocity
4 - 280 mm	-35 °C +100 °C	1 m/s
0.157 in - 11 in	-30 °F +210 °F	3 ft/s

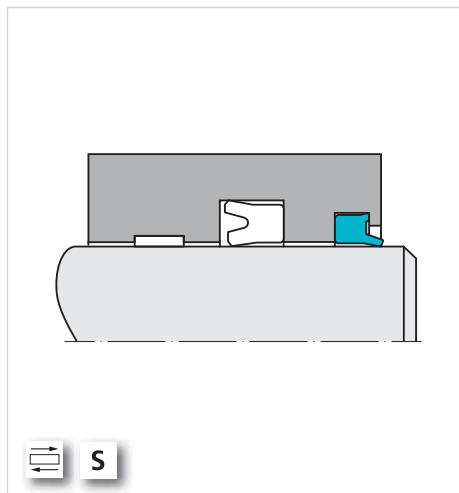

Zurcon® Scraper WNV

Zurcon® Scraper WNV is a double-acting scraper. Its dynamic scraping lip is specially designed with an additional inward sealing edge to keep the residual oil film in the system. If the volume of this oil film can not be backpumped by the main rod seal, a pressure build-up between main rod seal and scraper will be prevented by lifting the scraper lip to reduce pressure. The static sealing lip and edge ensure against ingress of dirt and fluids.


Ø Range	Temperature Range	Velocity
16 - 100 mm	-35 °C +100 °C	1 m/s
0.625 in - 4 in	-30 °F +210 °F	3 ft/s

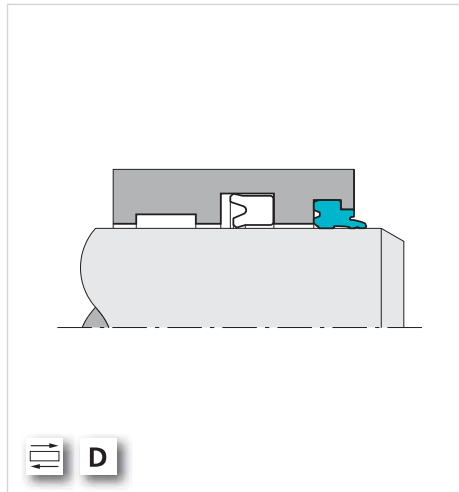

Zurcon® Scraper SWP

A single-acting Zurcon® scraper encased in a steel carrier, Zurcon® Scraper SWP gives excellent wear resistance and is easily installed into open grooves. The scraper is recommended for mobile hydraulic applications and as a rotary link pin seal.

Ø Range	Temperature Range	Velocity
25 - 190 mm	-35 °C +100 °C	1 m/s
1 in - 7.5 in	-30 °F +210 °F	3 ft/s

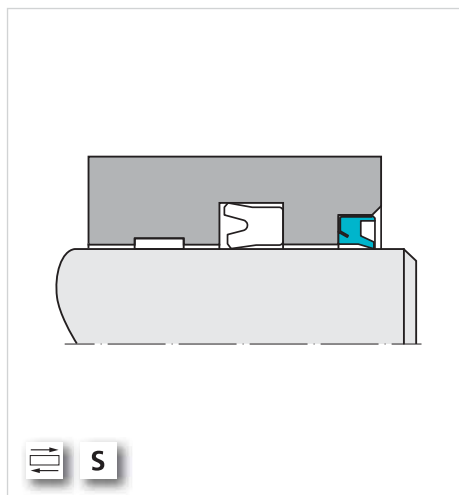


KEY TO APPLICATIONS: Reciprocating = Rotary = Oscillating = Helix = Static = Single-acting = S Double-acting = D



Turcite® Slydring®

Turcite® Slydring® prevents metal-to-metal contact between piston / rod and bore / gland, absorbing transverse loads. Turcite® material gives good load capacity with low friction and stick-slip-free operation. The Slydring® protects critical sealing lips from contamination and dieseling effects. Cost-effective, it allows designers freedom in hardware material selection. Higher static loads are permissible.


Ø Range	Radial Bearing Pressure	Temperature Range	Velocity
8 - 4,200 mm	15 MPa	-60 °C +200 °C	15 m/s
0.315 in - 165 in	2,200 psi	-75 °F +390 °F	50 ft/s

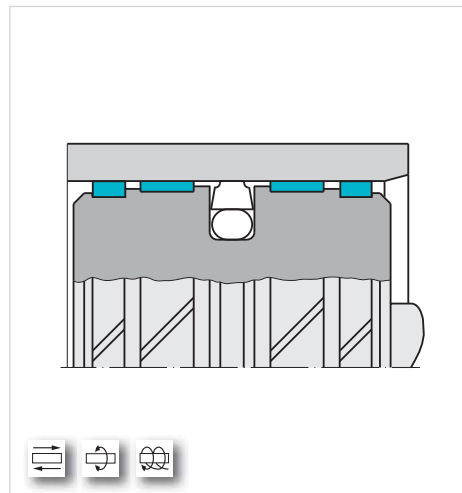

HiMod® Slydring®

HiMod® Slydring® prevents metal-to-metal contact between piston / rod and bore / gland, absorbing transverse loads. The modified polymeric material provides an economical solution for applications with medium transverse loads, while giving good wear and compression properties. The Slydring® is easily installed by snap-fitting and offers good dry-running and wiping performance. Higher static loads are permissible.


Ø Range	Radial Bearing Pressure	Temperature Range	Velocity
8 - 915 mm	50 MPa	-40 °C +135 °C	1 m/s
0.315 in - 36 in	7,200 psi	-40 °F +275 °F	3 ft/s

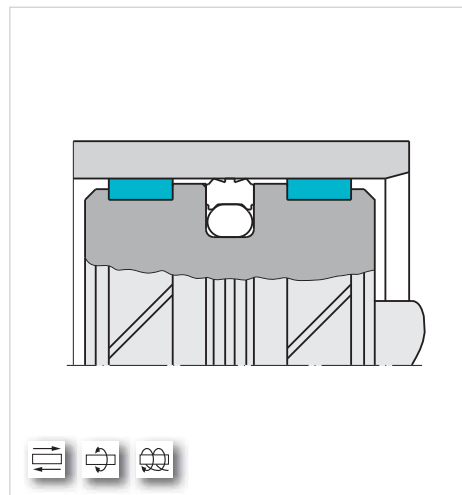

Orkot® Slydring®

Orkot® Slydring® prevents metal-to-metal contact between piston / rod and bore / gland, absorbing high transverse loads. Orkot® is a resin-impregnated, fine weave fabric material with added lubricants. It is capable of withstanding high side loads, damping vibrations and embedded foreign particles. Higher static loads are permissible. Special materials are available with operating temperatures up to +250 °C / +482 °F.

Ø Range	Radial Bearing Pressure	Temperature Range	Velocity
8 - 1,500 mm	120 MPa	-60 °C +130 °C	1 m/s
0.315 in - 59 in	17,400 psi	-75 °F +270 °F	3 ft/s

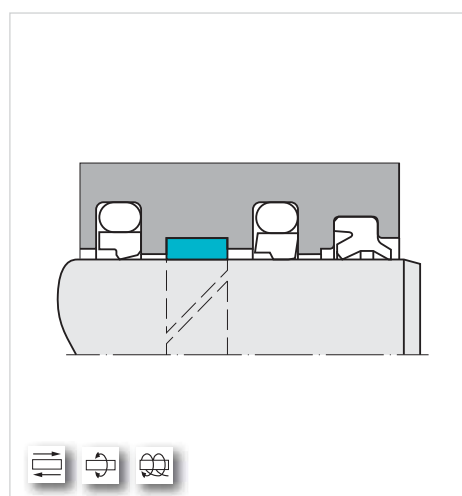


KEY TO APPLICATIONS: Reciprocating = Rotary = Oscillating = Helix = Static = Single-acting = **S** Double-acting = **D**



Pneumatic Piston Seal

The pneumatic product range offers single- and double-acting seals for piston applications. Made from extremely wear resistant material including Zurcon® polyurethane and FKM, these seals fit into small housings and are easily installed. The pneumatic piston seal range is recommended for standard and pneumatic cylinders with dry air.


Ø Range	Pressure Range	Temperature Range	Velocity
4 - 250 mm	1.6 MPa	-40 °C +85 °C	1 m/s
0.157 in - 10 in	232 psi	-40 °F +185 °F	3 ft/s

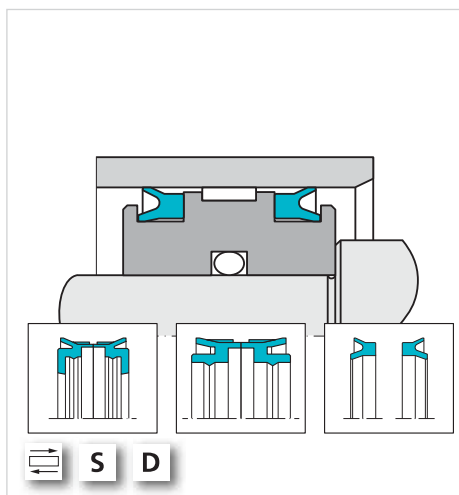

Pneumatic Rod Seal and Rod Seal - Scraper Combination

Pneumatic rod seals are available as lip seals and rod seal/scraper combinations for closed and open housings. Special materials provide high abrasion resistance and low friction cost-effectively. They are recommended for applications in standard cylinders, installed with a separate scraper or as rod seal/scraper combination for dry air.


Ø Range	Pressure Range	Temperature Range	Velocity
3 - 100 mm	1.6 MPa	-40 °C +150 °C	up to 5 m/s
0.118 in - 4 in	232 psi	-40 °F +300 °F	up to 16 ft/s

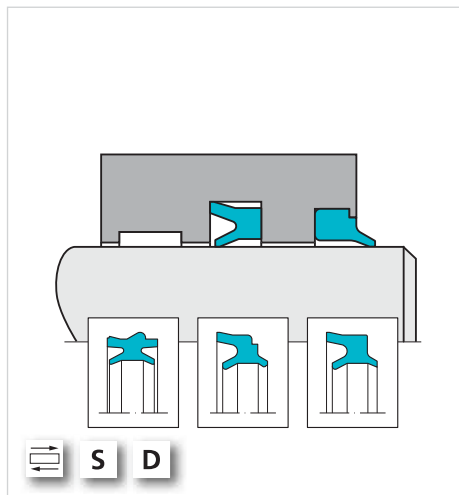

Pneumatic Scraper / Scraper for Guiding Units

These two versions of scrapers snap easily into open or semi-open grooves. Their special flexible lip design protects the cylinder from contamination. Where space is at a premium, the 3 mm / .118 in long type AWBB, is recommended (guiding units only).

Ø Range	Pressure Range	Temperature Range	Velocity
6 - 60 mm	—	-40 °C +80 °C	up to 4 m/s
0.236 in - 2.5 in	—	-40 °F +175 °F	up to 13 ft/s

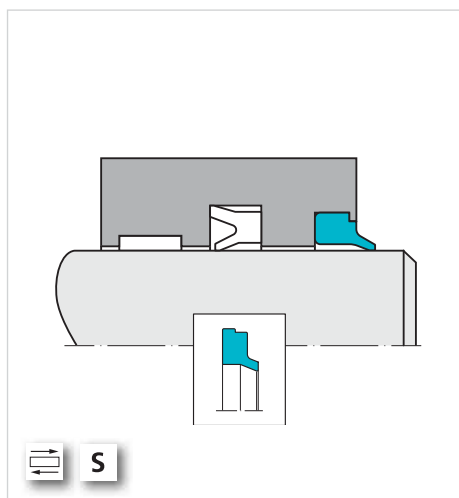


KEY TO APPLICATIONS: Reciprocating = Rotary = Oscillating = Helix = Static = Single-acting = S Double-acting = D



Pneumatic Cushioning Seal

Cushioning seals provide end-of-stroke damping in pneumatic cylinders, eliminating the need for check valves. These polyurethane, high performance seal elements are user-friendly and provide an automatic centering check valve function and easy, snap-in installation.


Ø Range	Pressure Range	Temperature Range	Velocity
6 - 60 mm	1.6 MPa	-40 °C +110 °C	1 m/s
0.236 in - 2.5 in	232 psi	-40 °F +230 °F	3 ft/s

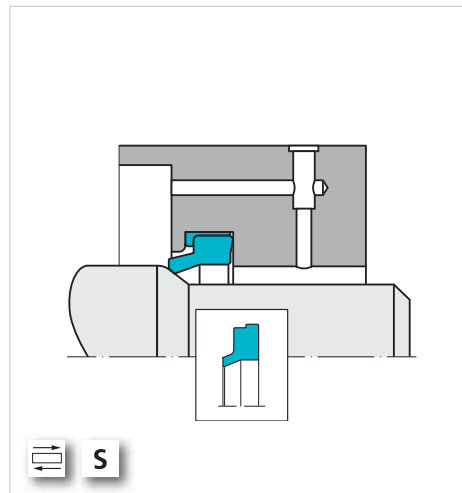

Pneumatic Glyd Ring® for Piston and Rods

Double-acting Glyd Ring® is available as piston or rod seal and is comprised of a slipper seal and an energizing O-Ring. This means less installation space is required. Different material combinations provide solutions suitable for special pneumatic applications where minimum static and dynamic friction, low stick-slip, high speed performance or wide temperature range are required.


Ø Range	Pressure Range	Temperature Range	Velocity
3 - 2,700 mm	1.6 MPa	-30 °C +200 °C	5 m/s
0.118 in - 106 in	232 psi	-20 °F +390 °F	16 ft/s

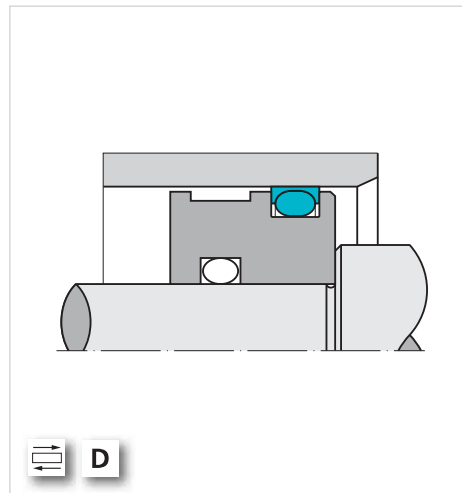

Pneumatic Wear Ring for Pistons and Rods

A complete range of seals and bearings for pneumatics including the most common dimensions for pistons and rods. The guide rings are made of a specially developed, self-lubricating plastic material to provide low friction, wear resistance, long term compression stability and excellent service life.

Ø Range	Pressure Range	Temperature Range	Velocity
8 - 250 mm	40 MPa	-40 °C +110 °C	1 m/s
0.315 in - 10 in	5,800 psi	-40 °F +230 °F	3 ft/s

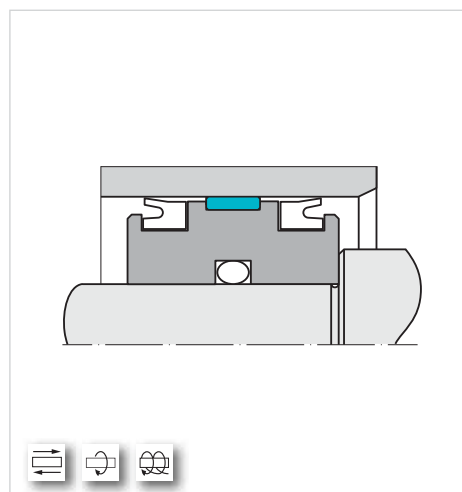

KEY TO APPLICATIONS: Reciprocating = Rotary = Oscillating = Helix = Static = Single-acting = **S** Double-acting = **D**




Complete Magnet Piston

The Complete Magnet Piston fulfills a large number of technical requirements within the pneumatics industry with its double-acting operation, dynamic sealing capability, guidance feature and mechanical end cushioning.

An NBR O-Ring acts as a static seal and seals the rod while an integrated magnet detects position. The dimension, magnet flux and return spring groove can all be customized to specific requirements.

Ø Range	Pressure Range	Temperature Range	Velocity
32 - 100 mm	1.6 MPa	-40 °C +80 °C	up to 1 m/s
1.25 in - 3.94 in	232 psi	-40 °F +175 °F	up to 3 ft/s

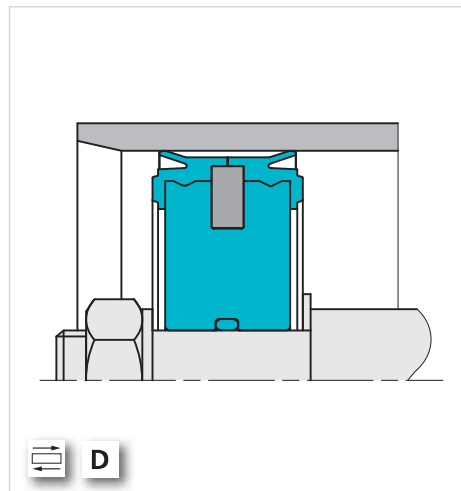

KEY TO APPLICATIONS: Reciprocating = Rotary = Oscillating = Helix = Static = Single-acting = **S** Double-acting = **D**



Rubber-to-Metal and Rubber-to-Plastic Bonded Parts

For certain applications custom seals are most suited. As your development partner, Trelleborg Sealing Solutions can work with you to design, develop and supply rubber-metal parts and bonded seals to your requirements.

Metal such as brass, aluminum, steel or stainless steel can be offered with bonding to all elastomer types.



Special and Customized Solutions in Polyurethane

Polyurethane materials have excellent elastic properties and optimum abrasion resistance. Outstanding tensile strength and low compression set offers numerous possibilities for sealing applications within the pneumatic industry.

For certain applications custom seals are most suited. As your development partner, Trelleborg Sealing Solutions can work with you to design, develop and supply precision elements and sealing systems suited to your requirements.



Engineered Molded Elastomeric Parts

Specialized molded parts with small profiles and specific cross sections can be offered according to ISO 3301-1/M1.

Custom-molded parts and static seals are manufactured to close tolerances in a wide range of engineered materials. These are developed in conjunction with Trelleborg Sealing Solutions to the specific requirements of the customer.




KEY TO APPLICATIONS: Reciprocating = Rotary = Oscillating = Helix = Static = Single-acting = **S** Double-acting = **D**



Radial Oil Seal

Radial oil seals are designed for sealing shafts and spindles. Providing long-lasting sealing efficiency, they consist of a rubber sealing lip, metal case and a spiralled tensioning spring. Available with or without external dust lip, they are self-retained in an open groove to ISO 6194 and DIN 3760. Versions come without the spring for grease applications, for use as a scraper or for helical movement.


Ø Range	Pressure Range	Temperature Range	Velocity
4 - 1,800 mm	1 MPa	-40 °C +200 °C	30 m/s
0.157 in - 71 in	145 psi	-40 °F +390 °F	100 ft/s

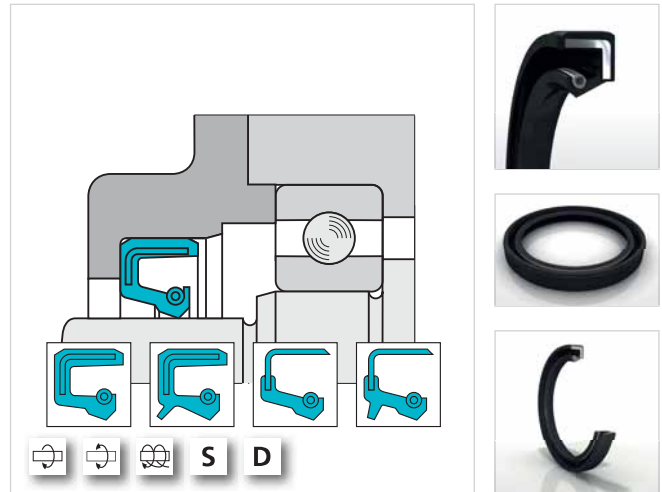

Shaft Repair Kit

Suitable for the repair of worn shafts or for original equipment manufacturing to avoid the need to harden the shaft. Shaft repair kits are thin-walled stainless steel sleeves which do not require any modification to the existing seal sizes. Tools for installation on the shaft are included in the kit.


Ø Range	Pressure Range	Temperature Range	Velocity
12 - 200 mm	—	—	—
0.472 in - 8 in	—	—	—

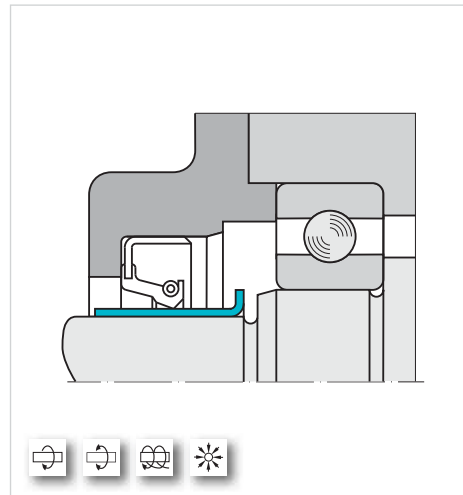

Sealing Cap

Sealing Caps consist of a metal cap which has been rubber coated. They are used to plug seal gaps or holes. They are often used as a substitute for sealing flanges and covers in gear manufacturing.

Ø Range	Pressure Range	Temperature Range	Velocity
16 - 180 mm	—	-30 °C +200 °C	—
0.63 in - 7 in	—	-20 °F +390 °F	—

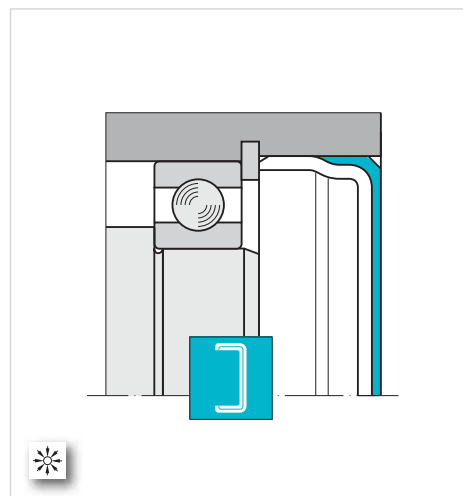


KEY TO APPLICATIONS: Reciprocating = Rotary = Oscillating = Helix = Static = Single-acting = **S** Double-acting = **D**



Turcon® Varilip® PDR

Turcon® Varilip® PDR seals are PTFE rotary shaft lip seals suitable for high surface speeds with low pressure. They provide stick-slip-free running with low friction and wide media and temperature range compatibility.


Ø Range	Pressure Range	Temperature Range	Velocity
–	1 MPa	-60 °C +200 °C	60 m/s
–	145 psi	-75 °F +390 °F	197 ft/s

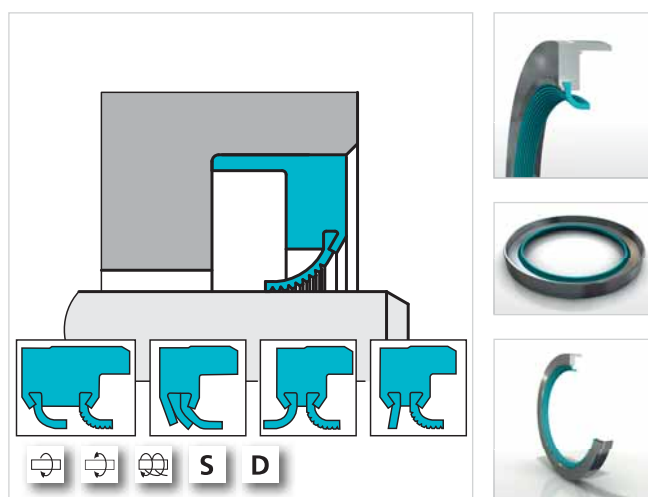

V-Ring®

The V-Ring® fits directly onto the shaft and seals axially against a counterface, such as shaft collar, thrust washer or bearing face. Its light lip pressure generates low friction.


Ø Range	Pressure Range	Temperature Range	Velocity
3 - 11,500 mm	–	-40 °C +200 °C	12 m/s
0.118 in - 452 in	–	-40 °F +390 °F	40 ft/s

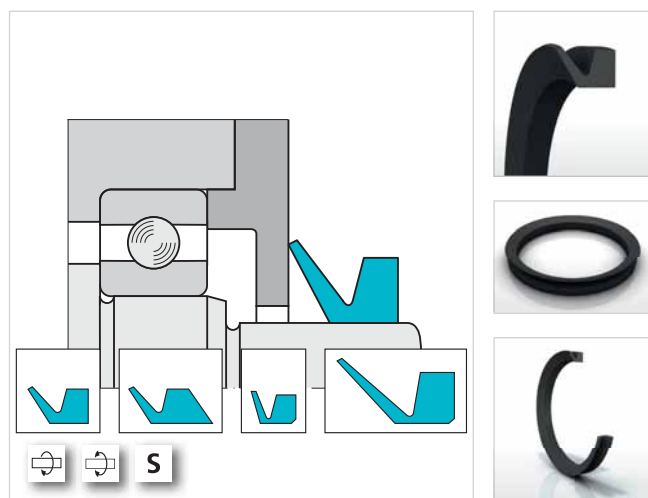

GAMMA Seal

The GAMMA Seal is an axial rotary seal that excludes contamination, moisture and grease. It consists of an elastomer sealing lip contained in a metal carrier. This design copes with arduous static and dynamic conditions in mobile hydraulics and power transmission applications.

Ø Range	Pressure Range	Temperature Range	Velocity
10 - 225 mm	–	-30 °C +200 °C	10 m/s
0.394 in - 9 in	–	-20 °F +390 °F	32 ft/s

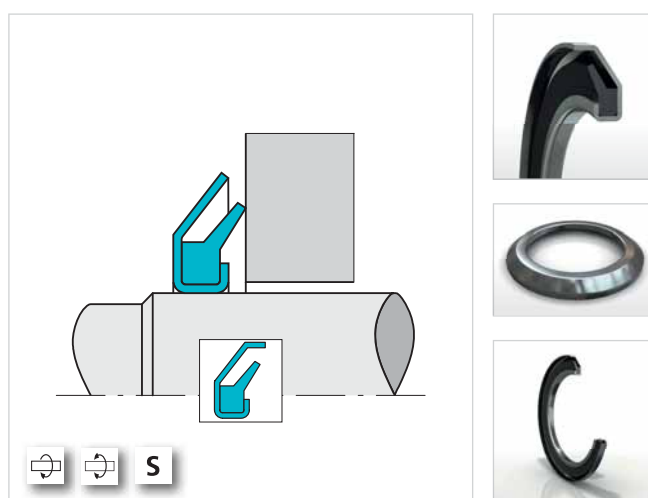


KEY TO APPLICATIONS: Reciprocating = Rotary = Oscillating = Helix = Static = Single-acting = S Double-acting = D



STEFA System 500 / 3000 / 5000 Cassette Seal

The STEFA System is a completely enclosed seal providing the functions of oil seal, wear sleeve and dust protection in one unit. It has been developed to meet the ever increasing requirements of long service life, high functional reliability, environmental safety and easy installation. STEFA System 500 / 3000 / 5000 Cassette Seals are used in heavy duty vehicle axles, hubs and industrial gearboxes.


Ø Range	Pressure Range	Temperature Range	Velocity
90 - 320 mm	0.05 MPa	-30 °C +200 °C	15 m/s
3.5 in - 12.5 in	7 psi	-20 °F +390 °F	50 ft/s

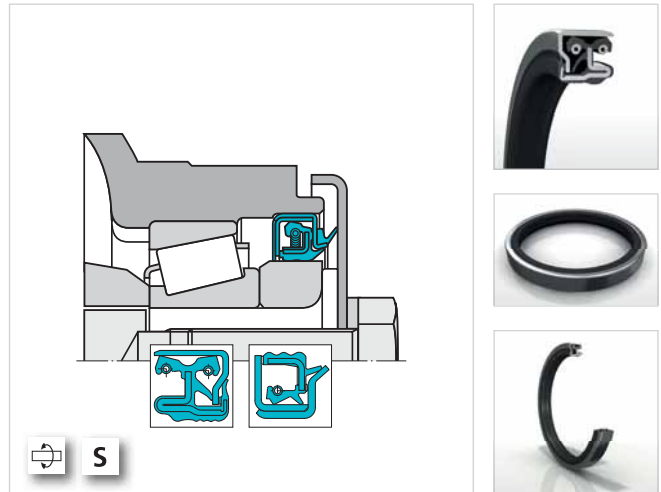

Turcon® Roto Glyd Ring®

A double-acting O-Ring energized seal designed for rotating, oscillating and helically moving pistons, rods and shafts. It is installed in grooves to ISO 7425 and is available in a single-acting version for higher rotating speeds.

Ø Range	Pressure Range	Temperature Range	Velocity
6 - 2,500 mm	30 MPa	-45 °C +200 °C	2 m/s
0.236 in - 98 in	4,350 psi	-50 °F +390 °F	6.5 ft/s

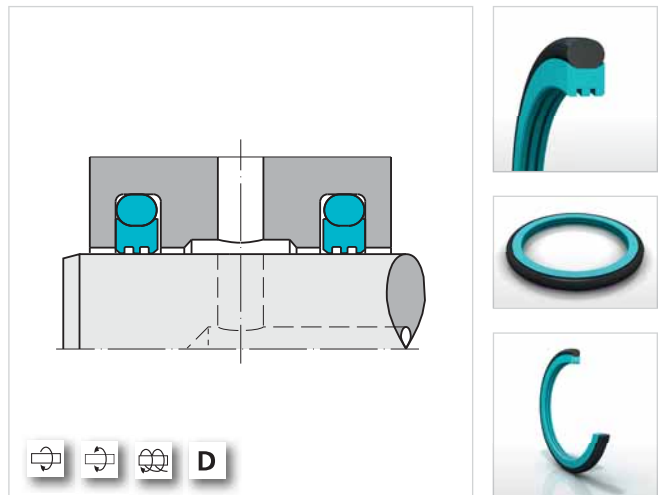


Turcon® Roto Variseal®

A single-acting sealing element comprised of a U-shaped Turcon® ring and metallic energizing finger spring. It offers low friction with no stick-slip, minimized break out force and high wear resistance. Its constrained flange eliminates potential seal rotation and it is resistant to most liquids and chemicals. Unlimited shelf life.

Ø Range	Pressure Range	Temperature Range	Velocity
5 - 3,300 mm	S: 25 MPa D: 20 MPa	-70 °C +300 °C	L: 15 m/s R: 2 m/s
0.197 in - 130 in	S: 3,625 psi D: 2,900 psi	-95 °F +570 °F	L: 50 ft/s R: 6.5 ft/s

S = Static, D = Dynamic, L = Linear, R = Rotary

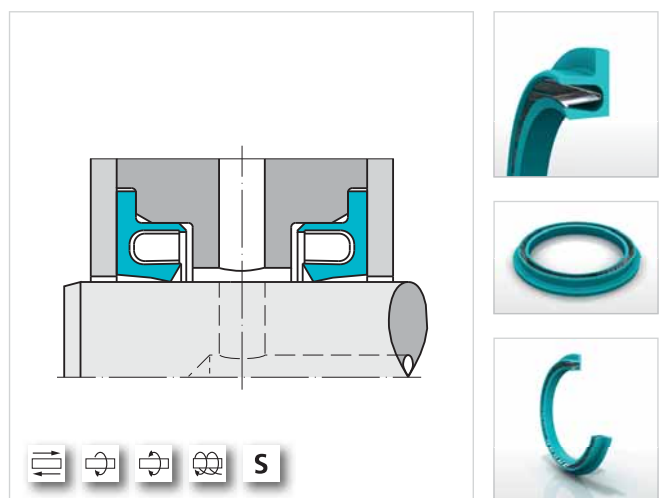


KEY TO APPLICATIONS: Reciprocating = Rotary = Oscillating = Helix = Static = Single-acting = S Double-acting = D



Turcon® Roto VL Seal®

Single-acting seal for rotary, turning and oscillating movements for pistons, rods and shafts in a wide range of machinery. The O-Ring activated L-shaped Turcon® or Zurcon® seal element gives optimized low frictional static and dynamic sealing performance. Offers high wear and chemical resistance depending on seal and O-Ring material. Installed in closed, standard O-Ring grooves.


Ø Range	Pressure Range	Temperature Range	Velocity
6 - 2,600 mm	30 MPa	-45 °C +200 °C	2 m/s
0.236 in - 102 in	4,350 psi	-50 °F +390 °F	6.5 ft/s

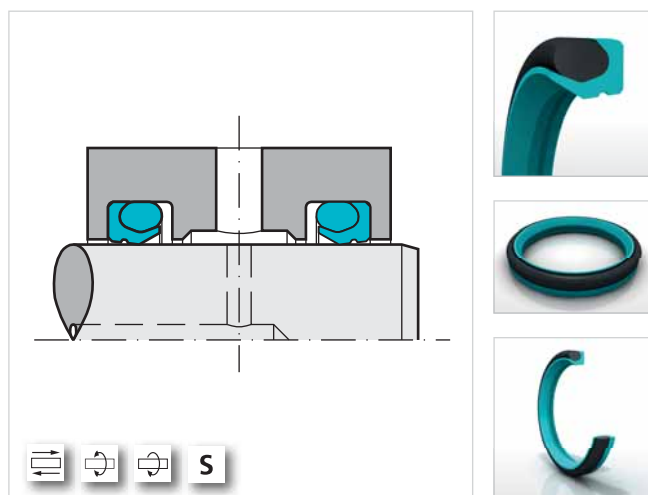

Zurcon® Roto Glyd Ring® S

Double-acting O-Ring energized seal designed for oscillating moving pistons, rods and shafts. It offers low friction performance in rotary transmission lead throughs and indexing tables.

Ø Range	Pressure Range	Temperature Range	Velocity
12 - 2,700 mm	40 MPa	-30 °C +100 °C	6.5 MPa x m/s
0.472 in - 106 in	5,800 psi	-20 °F +210 °F	2,916 psi x ft/s

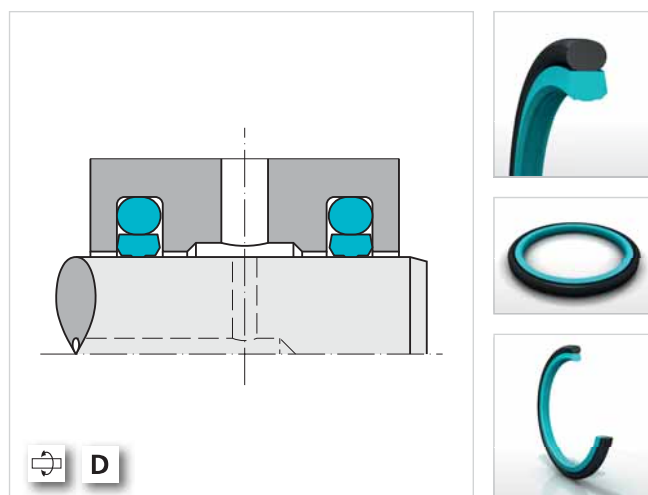


Mechanical Face Seals

Mechanical Face Seals are a special form of mechanical seals. They are also known under other designations, such as lifetime seals, floating seals, duo cone seals, toric seals and heavy duty seals.

There are two different types of Mechanical Face Seals:

- Type DO is the most common form that uses an O-Ring as a secondary sealing element.
- Type DF has an elastomer with a diamond-shaped cross section as a secondary sealing element instead of the O-Ring.

Ø Range	Pressure Range	Temperature Range	Velocity
45 - 750 mm	0.3 MPa	-45 °C +200 °C	3 m/s
1.772 in - 29.5 in	43.5 psi	-50 °F +390 °F	10 ft/s

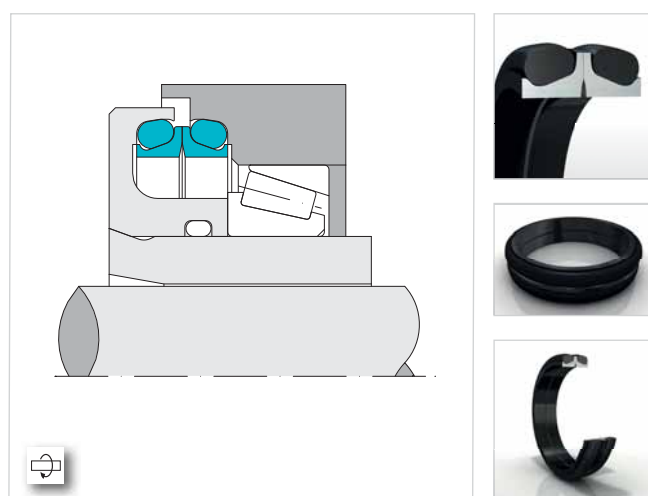


KEY TO APPLICATIONS: Reciprocating = Rotary = Oscillating = Helix = Static = Single-acting = **S** Double-acting = **D**



Turcite®-B Slydway®

Turcite®-B Slydway® is a low friction linear bearing strip C for use primarily, on the ways and gibs of machine tools. It provides low friction, stick-slip-free operation, long life and minimum wear. Turcite®-B Slydway® is applied using a two-part epoxy resin after cleaning and degreasing the bare metal surface thoroughly. Turcite®-B Slydway® is dimensionally stable, maintenance free and can be operated with or without lubrication.


Ø Range	Radial Bearing Pressure Range	Temperature Range	Velocity
—	9 MPa	up to +260 °C	1 m/s
—	1,300 psi	up to +500 °F	3 ft/s

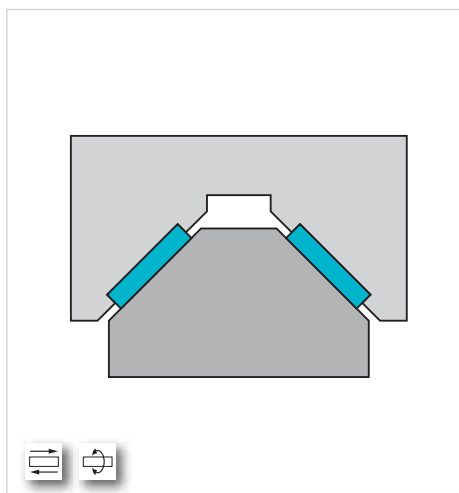

Turcite® Bearings

High load bearings made from Turcite® are dimensionally stable, wear resistant and provide excellent performance under dry and boundary lubrication conditions.

Ø Range	Radial Bearing Pressure Range	Temperature Range	Velocity
2 - 3,000 mm	15 MPa	-60 °C +200 °C	15 m/s
0.079 in - 118 in	2,200 psi	-75 °F +390 °F	50 ft/s

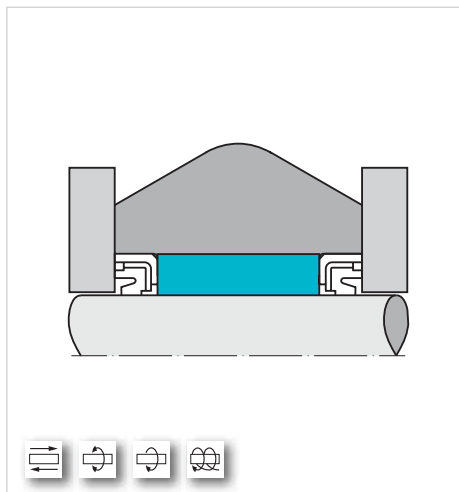

Orkot® Marine and Hydro Bearings

Orkot® is a composite consisting of technical fabrics impregnated with thermosetting resins, evenly dispersed solid lubricants and other additives. Orkot® bearings offer significant advantages over traditional metal bearings. All are dimensionally stable, have excellent wear resistance and outstanding low-friction characteristics, giving them unrivalled performance in dry running conditions or with boundary lubrication. With virtually no swell in seawater, they are ideal for marine and hydropower applications.

Ø Range	Radial Bearing Pressure Range	Temperature Range	Velocity
2 - 3,000 mm	S: 120 MPa D: 90 MPa	-60 °C +250 °C	6 m/s
0.079 in - 118 in	S: 17,400 psi D: 13,000 psi	-75 °F +480 °F	20 ft/s

S = Estática, D = Dinámica



KEY TO APPLICATIONS: Reciprocating = Rotary = Oscillating = Helix = Static = Single-acting = S Double-acting = D




Engineered Molded Elastomeric Parts

Customized seals and other components in a wide range of standard and specialized elastomers, including Isolast[®], are manufactured to close tolerances for all types of industries and applications. As your development partner, Trelleborg Sealing Solutions can work with you to design, develop and supply custom engineered molded parts to suit your application requirements.

Temperature Range

up to +325 °C
up to +615 °F

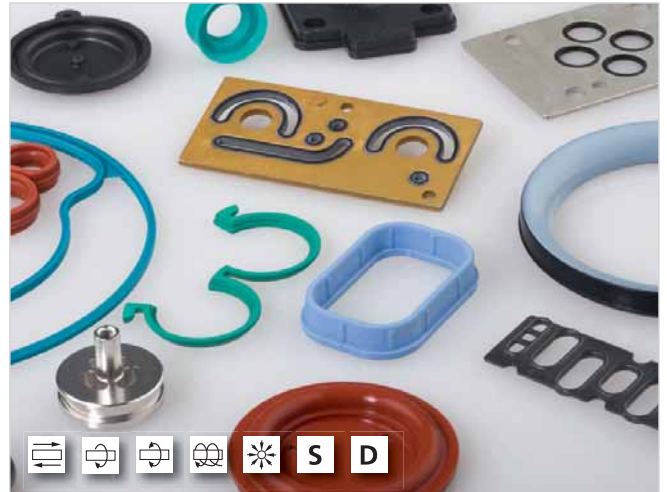

Engineered PTFE Components

A wide range of filled and unfilled engineered PTFE components are made available to all types of industry. They include valve seats, pump diaphragms, chevron packings, nozzles, bellows, guides, bearings and electrical insulators. These are developed in conjunction with Trelleborg Sealing Solutions to the specific requirements of the customer.

Temperature Range


up to +260 °C
up to +500 °F



Engineered HiMod[®] FlatSeal[™]

Flat gaskets are primarily fitted in flanges and widely used in sanitary and industrial applications. For the more demanding petrochemical and chemical processing sectors, superior materials that are compliant with blowout and fugitive emission regulations are offered. For food and beverage applications, materials compliant with stringent food contact standards such as FDA, are provided.

Pressure Range	Temperature Range
up to 25 MPa	-210 °C +550 °C
up to 3,625 psi	-345 °F +1,020 °F

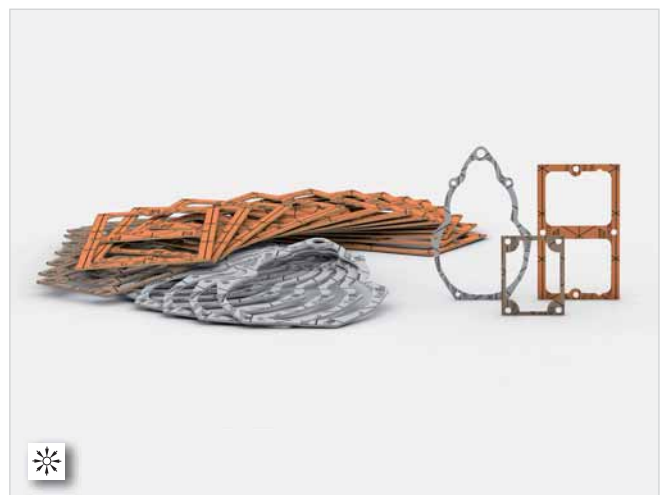


KEY TO APPLICATIONS: Reciprocating = Rotary = Oscillating = Helix = Static = Single-acting = **S** Double-acting = **D**

Rubber-to-Metal and Rubber-to-Plastic Bonded Parts

In many applications, a composite molded part has advantages in terms of technical robustness, quality, performance and total cost of ownership. Bonding of either standard or specialized elastomers, including Isolast®, is feasible with a large variety of metals and thermoplastics. As your development partner, Trelleborg Sealing Solutions can work with you to design, develop and supply a component to suit your application requirements.

Temperature Range
-60 °C +325 °C
-75 °F +615 °F

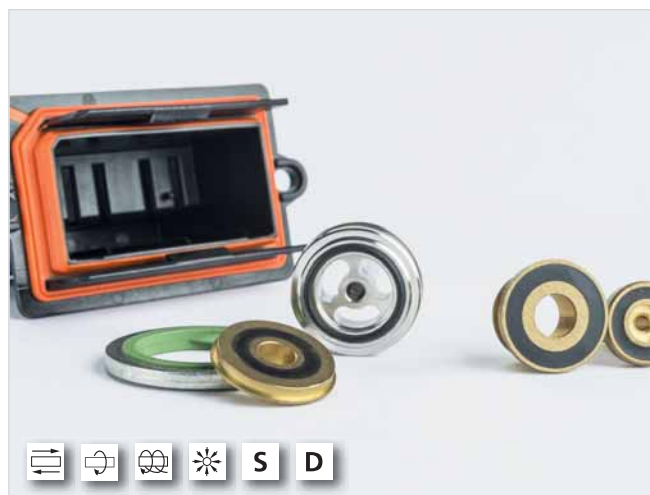

Rubber and Rubber-to-Metal Bonded Gaskets

Precision homogeneous or rubber-to-metal bonded gaskets are custom molded from a large variety of engineered elastomers for high performance engine and other applications. Metals such as cold-rolled or stainless steel, brass or aluminum can be offered bonded to all elastomer types. As your development partner, Trelleborg Sealing Solutions can work with you to design, develop and supply gaskets to suit your application requirements.

Temperature Range
-60 °C +325 °C
-75 °F +615 °F



Ground Balls

Ground Balls are rubber spheres of high dimensional accuracy. They guarantee sealing without leaks, are resistant to dirt and produce little noise. Ground Balls are used primarily as sealing elements in non-return check valves to seal against hydraulic fluid, water or air.

Temperature Range
-30 °C +200 °C
-20 °F +390 °F



KEY TO APPLICATIONS: Reciprocating = Rotary = Oscillating = Helix = Static = Single-acting = S Double-acting = D



Elastomer Diaphragms

Diaphragms are available in many forms and designs in a variety of homogeneous or fabric-reinforced elastomers. Technically challenging applications are solved through composite design and material technology. This includes the application of PTFE and other barrier materials for chemically aggressive environments. Plastic or metal-to-rubber bonding can be incorporated to simplify assembly and provide precision control of movement or pressure.

Pressure Range (Not reinforced)	Pressure Range (Not reinforced)	Temperature Range
up to 0.05 MPa	10 MPa	-50 °C +325 °C
up to 7 psi	1,450 psi	-55 °F +615 °F



Custom-made HiMod® High Modulus Plastics

A wide range of high performance, high modulus thermoplastics are available for use as custom-molded components, reinforcing rings and Back-up Rings. Grades can optimize operation on structural, chemical, electrical and high performance bearing applications.

Temperature Range
up to +300 °C
up to +570 °F



Liquid Silicone (LSR) Molded Parts

High-precision LSR parts, often delicate or micro-sized, are manufactured by injection molding techniques for many industrial sectors including medical technology, household appliances, the food and pharmaceutical industries and electrical engineering. As a result of high-performance, precision tool making and sophisticated process engineering and expertise, alongside fully automated production, LSR injection-molded parts continue to be developed for a wide range of challenging applications.


Temperature Range
-40 °C +175 °C
-40 °F +350 °F



KEY TO APPLICATIONS: Reciprocating = Rotary = Oscillating = Helix = Static = Single-acting = **S** Double-acting = **D**

Two Component (2K) Liquid Silicone Parts

Specially developed, proprietary tool design and process innovation are the foundation of our advanced two-component injection technology, allowing the production of complex, high-precision parts. In a two-shot molding process, either two dissimilar silicones or a combination of silicone and thermoplastics are injected in two shots into a single tool using a fully automated process. 2K solutions offer increased design latitude and eliminate the need for secondary handling and assembly operations.

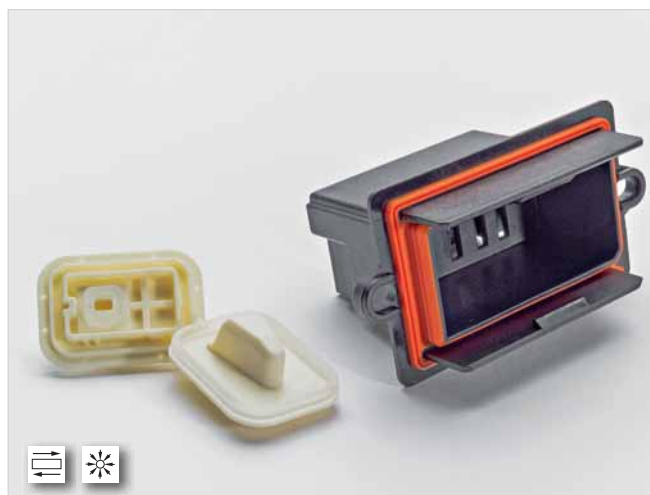


Temperature Range

-40 °C +175 °C

-40 °F +350 °F

Silicone Hose and Tube

A comprehensive range of platinum cured silicone hose and tube is produced to the most stringent performance and purity standards demanded in the Life Sciences, biotechnology and pharmaceutical markets. PharmaTube™ is used either as singular tube or value-added tube sets and assemblies in a wide variety of applications such as peristaltic pumps, drug delivery or catheters. As your development partner, Trelleborg Sealing Solutions can work with you to design, develop and supply a PharmaTube™ solution to suit your application requirements.

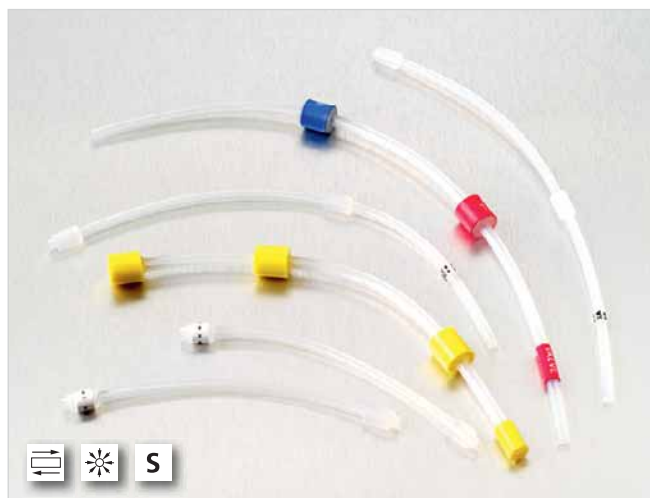

Temperature Range

-40 °C +175 °C

-40 °F +350 °F



Rubore® Seals

The Rubore® process is a unique rubber-metal layering technology permitting complex seal designs that have never before been possible. Rubore® Seals provide overall cost benefits, reducing weight and frequently eliminate the need for surface finishing and after treatments. The stiffness of the product reduces handling costs and logistics requirements, and makes automated seal installation achievable.



Temperature Range


-40 °C +165 °C

-40 °F +329 °F

KEY TO APPLICATIONS: Reciprocating = Rotary = Oscillating = Helix = Static = Single-acting = **S** Double-acting = **D**

Flexcoat™ coatings

Micro-thin, high-performance coatings and surface modification provide the ultimate choice, maximizing friction characteristics during assembly and in dynamic applications. Most of the Assembly and Application Professionals provide a UV-indicator. This is highlighted under ultraviolet lamps.

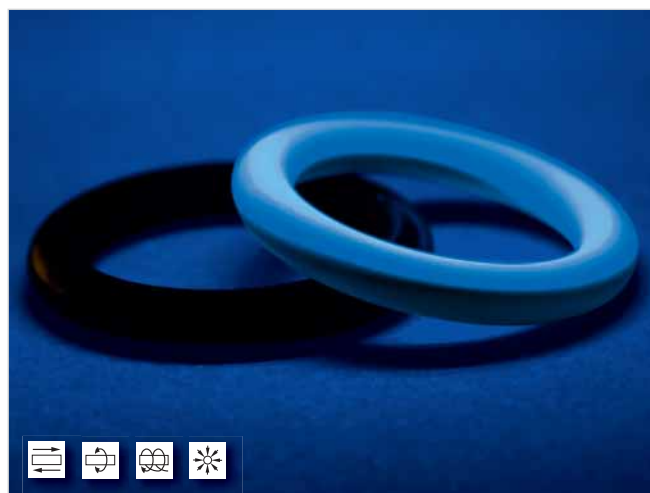

Temperature Range

-40 °C +175 °C

-40 °F + 350 °F

Flexcoat™ colored coatings

The primary function of any coating is to improve the friction characteristics of an elastomer seal. In addition, colored coatings enable effective differentiation of seals and 100 percent detection in production and assembly process.



Temperature Range






-40 °C +150 °C

-40 °F +300 °F

Flexclean™ cleaning solutions

Elastomeric seals can be offered in clean conditions to various cleanliness standards. These include seals free of paint wetting impairment substances (PWIS-free), maximum allowed particle sizes of 400 µm or 200 µm based on ISO 16232 or seals washed and packed in a cleanroom class 5 according to ISO 14644-1.



KEY TO APPLICATIONS: Reciprocating =  Rotary =  Oscillating =  Helix =  Static =  Single-acting = **S** Double-acting = **D**

Product Name	Product Range	Overview Page	Description Page
Airseal	Static Seals	18	37
Back-up Ring	Static Seals	17	35
Balsele	Hydraulic Seals – Rod Seals	21	45
Bonded Seal	Static Seals	18	37
Compact Seal® Polypac® DBM	Hydraulic Seals – Piston Seals	19	41
Complete Magnet Piston	Pneumatic Seals	26	58
Custom-made HiMod® High Modulus Plastics	Engineered Seals, Gaskets and other Parts	29	67
Elastomer Diaphragms	Engineered Seals, Gaskets and other Parts	29	67
Elastomeric O-Ring	O-Rings	16	32
Engineered HiMod® FlatSeal™	Engineered Seals, Gaskets and other Parts	29	65
Engineered Molded Elastomeric Parts	Non-standard Pneumatic Seals	26	59
Engineered Molded Elastomeric Parts	Engineered Seals, Gaskets and other Parts	29	65
Engineered PTFE Components	Engineered Seals, Gaskets and other Parts	29	65
FEP O-Ring	O-Rings	16	33
Flexclean™ cleaning solutions	Surface Finishing	31	69
Flexcoat™ coatings	Surface Finishing	31	69
Flexcoat™ colored coatings	Surface Finishing	31	69
FlexiMold™ O-Ring	O-Rings	16	32
GAMMA Seal	Rotary Seals	27	61
Ground Balls	Engineered Seals, Gaskets and other Parts	29	66
HiMod® Slydring®	Hydraulic Wear Rings	25	55
Isolast® Perfluoroelastomer O-Ring	O-Rings	16	33
Kantseal	Static Seals	17	34
Liquid Silicone (LSR) Molded Parts	Engineered Seals, Gaskets and other Parts	29	67
Mechanical Face Seals	Rotary Seals	28	63
Metal Scraper	Hydraulic Scrapers	24	53
Orkot® Marine and Hydro Bearings	Bearings & Bushings	28	64
Orkot® Slydring®	Hydraulic Wear Rings	25	55
PHD / CST Seal	Hydraulic Seals – Piston Seals	19	42
Pneumatic Cushioning Seal	Pneumatic Seals	25	57
Pneumatic Glyd Ring® for Pistons and Rods	Pneumatic Seals	26	57
Pneumatic Piston Seal	Pneumatic Seals	25	56
Pneumatic Rod Seal and Rod Seal - Scraper Combination	Pneumatic Seals	25	56
Pneumatic Scraper / Scraper for Guiding Units	Pneumatic Seals	25	56
Pneumatic Wear Ring for Pistons and Rods	Pneumatic Seals	26	57
Polyurethane O-Ring	O-Rings	16	32
PTFE O-Ring	O-Rings	16	33
Quad-Ring® Seal	Static Seals	17	34
Radial Oil Seal	Rotary Seals	27	60
Rubber and Rubber-to-Metal Bonded Gaskets	Engineered Seals, Gaskets and other Parts	29	66
Rubber-to-Metal and Rubber-to-Plastic Bonded Parts	Engineered Seals, Gaskets and other Parts	29	66
Rubber-to-Metal and Rubber-to-Plastic Bonded Parts	Non-standard Pneumatic Seals	26	59
Rubore® Seals	Engineered Seals, Gaskets and other Parts	30	68
Scraper DA17	Hydraulic Scrapers	23	52
Scraper DA27	Hydraulic Scrapers	23	52
Scraper SA	Hydraulic Scrapers	24	53
Scraper WRM	Hydraulic Scrapers	24	53
Sealing Cap	Rotary Seals	27	60
Selemaster DSM	Hydraulic Seals – Piston Seals	20	43
Selemaster SM	Hydraulic Seals – Rod Seals	22	49
Shaft Repair Kit	Rotary Seals	27	60
Special and Customized Solutions in Polyurethane	Non-standard Pneumatic Seals	26	59

Product Name	Product Range	Overview Page	Description Page
Silicone Hose and Tube	Engineered Seals, Gaskets and other Parts	30	68
STEFA System 500 / 3000 / 5000 Cassette Seal	Rotary Seals	27	62
Turcite® Bearings	Bearings & Bushings	28	64
Turcite® Slydring®	Hydraulic Wear Rings	25	55
Turcite® B Slydway®	Bearings & Bushings	28	64
Turcon® AQ Seal®	Hydraulic Seals - Piston Seals	18	39
Turcon® AQ Seal® 5	Hydraulic Seals - Piston Seals	19	39
Turcon® AQ Seal® with Bean Seal	Hydraulic Seals - Rod Seals	22	48
Turcon® AQ Seal® 5 with Bean Seal	Hydraulic Seals - Rod Seals	22	48
Turcon® Double Delta®	Hydraulic Seals - Piston Seals	18	39
Turcon® Double Delta®	Hydraulic Seals - Rod Seals	22	49
Turcon® Excluder® 2	Hydraulic Scrapers	23	50
Turcon® Excluder® 5	Hydraulic Scrapers	23	50
Turcon® Excluder® F	Hydraulic Scrapers	23	50
Turcon® Excluder® G	Hydraulic Scrapers	23	51
Turcon® Glyd Ring®	Hydraulic Seals - Piston Seals	18	38
Turcon® Glyd Ring®	Hydraulic Seals - Rod Seals	21	47
Turcon® Glyd Ring® T	Hydraulic Seals - Piston Seals	18	38
Turcon® Glyd Ring® T	Hydraulic Seals - Rod Seals	21	47
Turcon® Roto Glyd Ring®	Rotary Seals	27	62
Turcon® Roto Variseal®	Rotary Seals	27	62
Turcon® Roto VL Seal®	Rotary Seals	28	63
Turcon® Stepseal® V	Hydraulic Seals - Piston Seals	19	40
Turcon® Stepseal® V	Hydraulic Seals - Rod Seals	20	44
Turcon® Stepseal® 2K	Hydraulic Seals - Piston Seals	19	40
Turcon® Stepseal® 2K	Hydraulic Seals - Rod Seals	20	44
Turcon® Varilip® PDR	Rotary Seals	27	61
Turcon® Variseal® H	Static Seals	17	36
Turcon® Variseal® HF	Static Seals	17	36
Turcon® Variseal® M2	Hydraulic Seals - Piston Seals	19	42
Turcon® Variseal® M2	Hydraulic Seals - Rod Seals	21	46
Turcon® Variseal® W2	Hydraulic Seals - Piston Seals	20	42
Turcon® Variseal® W2	Hydraulic Seals - Rod Seals	21	46
Turcon® VL Seal®	Hydraulic Seals - Piston Seals	20	43
Turcon® VL Seal®	Hydraulic Seals - Rod Seals	21	47
Two Component (2K) Liquid Silicone Parts	Engineered Seals, Gaskets and other Parts	30	68
VEEPAC	Hydraulic Seals - Piston Seals	20	43
VEEPAC	Hydraulic Seals - Rod Seals	22	49
V-Ring®	Rotary Seals	27	61
Wills Rings® C	Static Seals	17	35
Wills Rings® O	Static Seals	17	35
Zurcon® Buffer Seal	Hydraulic Seals - Rod Seals	21	45
Zurcon® Dualseal	Static Seals	17	34
Zurcon® Glyd Ring® P	Hydraulic Seals - Piston Seals	18	38
Zurcon® L-Cup®	Hydraulic Seals - Rod Seals	21	46
Zurcon® Rimseal	Hydraulic Seals - Rod Seals	20	44
Zurcon® Roto Glyd Ring® S	Rotary Seals	28	63
Zurcon® SAE J 518 Flange Seals	Static Seals	17	36
Zurcon® Scraper ASW	Hydraulic Scrapers	23	52
Zurcon® Scraper DA22	Hydraulic Scrapers	23	51
Zurcon® Scraper DA24	Hydraulic Scrapers	23	51
Zurcon® Scraper SWP	Hydraulic Scrapers	24	54

Product Name	Product Range	Overview Page	Description Page
Zurcon® Scraper WNE	Hydraulic Scrapers	24	54
Zurcon® Scraper WNV	Hydraulic Scrapers	24	54
Zurcon® U-Cup	Hydraulic Seals - Piston Seals	19	41
Zurcon® U-Cup RU9	Hydraulic Seals - Rod Seals	21	45
Zurcon® Wynseal	Hydraulic Seals - Piston Seals	19	40
Zurcon® Wynseal M	Hydraulic Seals - Piston Seals	19	41
Zurcon® Wynseal M	Hydraulic Seals - Rod Seals	22	48

LOCAL CONTACTS

EUROPE

Austria – Vienna (Slovenia)

+43 (0) 1 406 47 33

Belgium - Dion-Valmont (Luxembourg)

+32 (0) 10 22 57 50

Bulgaria – Sofia

(Azerbaijan, Belarus, Greece, Romania, Ukraine)

+359 (0) 2 969 95 99

Croatia – Zagreb (Albania, Bosnia and Herzegovina,

Macedonia, Serbia, Montenegro)

+385 (0) 1 24 56 387

Czech Republic - Rakovník (Slovakia)

+420 313 529 111

Denmark – Copenhagen

+45 48 22 80 80

Finland – Vantaa (Estonia, Latvia)

+358 (0) 207 12 13 50

France - Maisons-Laffitte

+33 (0) 1 30 86 56 00

Germany - Stuttgart

+49 (0) 711 7864 0

Hungary – Budaörs

+36 (06) 23 50 21 21

Italy – Livorno

+39 0586 22 6111

The Netherlands - Rotterdam

+31 (0) 10 29 22 111

Norway – Oslo

+47 22 64 60 80

Poland – Warsaw (Lithuania)

+48 (0) 22 863 30 11

Russia – Moscow

+7 495 627 57 22

Spain – Madrid (Portugal)

+34 (0) 91 71057 30

Sweden – Jönköping

+46 (0) 36 34 15 00

Switzerland – Crissier

+41 (0) 21 631 41 11

Turkey – Istanbul

+90 216 569 73 00

United Kingdom - Solihull (Eire, South Africa)

+44 (0) 121 744 1221

Aerospace Hub Europe, North

(UK and Nordic Countries)

+44 (0) 121 744 1221

Aerospace Hub Europe, South & West

(Continental Europe and Middle East)

+33 (0) 1 30 86 56 00

Automotive Hub Europe

+49 (0) 711 7864 0

AMERICAS

Americas Regional

+1 260 749 9631

Brazil – São José dos Campos

+55 12 3932 7600

Canada Central – Etobicoke, ON

+1 416 213 9444

Canada East – Montreal, QC

+1 514 284 1114

Canada West – Langley, BC

+1 604 539 0098

Mexico - Mexico City

+52 55 57 19 50 05

USA, Great Lakes - Fort Wayne, IN

+1 260 482 4050

USA, East - Mt. Juliet, TN

+1 615 800 8340

USA, Midwest - Schaumburg, IL

+1 630 539 5500

USA, Northern California - Fresno, CA

+1 559 449 6070

USA, Northwest - Portland, OR

+1 503 595 6565

USA, Southwest - Houston, TX

+1 713 461 3495

Aerospace Hub Airframe

+1 303 469 1357

Aerospace Hub Distribution & Engineering

+1 260 749 9631

Aerospace Hub East

+1 610 828 3209

Aerospace Hub West

+1 310 371 1025

Automotive Hub North America

+1 734 354 1250

Automotive Hub South America

+55 12 3932 7600

ASIA PACIFIC

Asia Pacific Regional

+65 6 577 1778

China – Hong Kong

+852 2366 9165

China – Shanghai

+86 (0) 21 6145 1830

India – Bangalore

+91 (0) 80 3372 9000

Japan – Tokyo

+81 (0) 3 5633 8008

Korea – Seoul

+82 (0) 2 761 3471

Malaysia - Kuala Lumpur

+60 (0) 3 90549266

Taiwan – Taichung

+886 4 2382 8886

Vietnam – Ho Chi Minh City

+84 8 6288 6407

Singapore and all other countries in South

and East Asia, Australasia

+65 6 577 1778

Aerospace Hub China

+86 (0) 21 6145 1830

Aerospace Hub Singapore

+65 6 577 1778

Automotive Hub China

+86 (0) 21 6145 1830

Automotive Hub India

+91 (0) 80 3372 9200

AFRICA, CENTRAL ASIA AND MIDDLE EAST

Africa & Iran (excluding South Africa (see UK))

+41 (0) 21 631 41 11

Central Asia (Armenia, Georgia, Kazakhstan,

Kyrgyzstan, Tajikistan, Uzbekistan)

+7 495 627 57 22

Middle East and Gulf Region

+359 (0) 2 969 95 99



Trelleborg is a world leader in engineered polymer solutions that seal, damp and protect critical applications in demanding environments. Its innovative engineered solutions accelerate performance for customers in a sustainable way. The Trelleborg Group has local presence in over 40 countries around the world.



facebook.com/TrelleborgSealingSolutions
twitter.com/TrelleborgSeals
youtube.com/TrelleborgSeals
flickr.com/TrelleborgSealingSolutions



WWW.TSS.TRELLEBORG.COM