


# RIMI SEAL MECHANICAL SEAL CATALOG (1)



## RM 301



RM 301

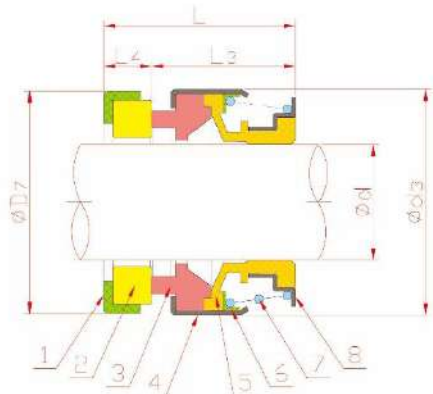

■ Application:

压力: 0.6MPa      Pressure: 0.6MPa  
 线速度: 10米/秒      Speed: 10M/S  
 温度: -30℃ ~ 200℃      Temperature: -30℃ ~ 200℃

型 号	d	d3	D7	L	L3	L4
RM 301-6	6	18	22	15	11	4
RM 301-8	8	18	22	15	11	4
RM 301-9	9	24	26	21	13	8
RM 301-10	10	24	26	21	13	8
RM 301-11	11	24	26	21	13	8
RM 301-12	12	24	26	21	13	8
RM 301-13	13	24	26	18.5/21	13	5.5/8
RM 301-14S	14	28	28.5/30	21	13	8
RM 301-14L	14	32	29.5	21	13	8
RM 301-15S	15	28	30	21	13	8
RM 301-15M	15	32	29.5	21	13	8
RM 301-15L	15	39	38	21	13	8
RM 301-16S	16	28	30	21	13	8
RM 301-16M	16	32	29.5	21	13	8
RM 301-16L	16	39	38/42	21	13	8
RM 301-17	17	39	42	21	13	8
RM 301-18	18	39	42	21	13	8
RM 301-19	19	39	42	21	13	8
RM 301-20S	20	39	42	21	13	8
RM 301-20L	20	42	45	21.5/23	13	8.5/10
RM 301-22S	22	39	42	21	13	8
RM 301-22	22	42	45	21.5/23	13	8.5/10
RM 301-23	23	47	50	23.5	13.5	10
RM 301-24	24	47	50	23.5	13.5	10
RM 301-25S	25	42	50	23.5	13.5	10
RM 301-25	25	47	50	23.5	13.5	10
RM 301-26	26	47	50	23.5	13.5	10
RM 301-27	27	47	50	23.5	13.5	10
RM 301-28	28	54	57	25	15	10
RM 301-30	30	54	57	25	15	10
RM 301-32	32	54	57	25	15	10
RM 301-35	35	60	63	26	16	10
RM 301-38	38	65	68	30	18	12
RM 301-40	40	65	68	30	18	12
RM 301-45	45	70	73	32	20	12
RM 301-50	50	85	88	38	23	15
RM 301-55	55	85	88	38	23	15
RM 301-60	60	105	110	45	30	15
RM 301-65	65	105	110	45	30	15
RM 301-70	70	105	110	47	32	15


■ Specification:

No.	配件/DESCRIPTION	材料/MATERIAL
1	橡胶套/Cup Gasket	NBR / HNBR / VITON
2	静环/Stationary ring	Alumina ceramic/SiC
3	动环/Rotary ring	Graphite carbon/SiC
4	传动套/Retainer	SUS304
5	橡胶波纹管/Bellows	NBR / HNBR / VITON
6	挡圈/Closing ring	SUS304
7	弹簧/Spring	SUS304
8	弹簧座/Spring seat	SUS304

# RM 155



RM 155

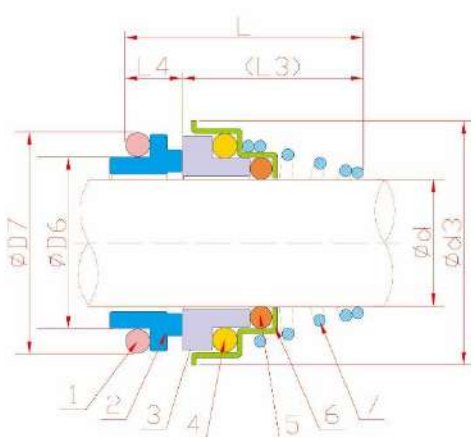

**Application:**

压力: 1MPa                      Pressure : 1MPa  
 线速度: 15米/秒              Speed: 12M/S  
 温度: -30℃ ~ 200℃        Temperature : -30℃ ~ 200℃

型号	d	d3	D6	D7	L	L3	L4
155-10	10.0	20.0	14.0	18.1	20.5	15.0	5.5
155-11	11.0	22.0	16.5	20.6	23.5	18.0	5.5
155-12	12.0	22.0	16.5	20.6	23.5	18.0	5.5
155-13	13.0	25.0	19.0	23.1	28.0	22.0	6.0
155-14	14.0	25.0	19.0	23.1	28.0	22.0	6.0
155-15	15.0	29.0	21.0	26.9	30.0	22.0	8.0
155-16	16.0	29.0	21.0	26.9	30.0	22.0	8.0
155-17	17.0	29.0	21.0	26.9	30.0	22.0	8.0
155-18	18.0	33.0	25.0	30.9	32.0	24.0	8.0
155-19	19.0	33.0	25.0	30.9	33.0	25.0	8.0
155-20	20.0	33.0	25.0	30.9	33.0	25.0	8.0
155-21	21.0	38.0	30.0	35.4	33.0	25.0	8.0
155-22	22.0	38.0	30.0	35.4	33.0	25.0	8.0
155-23	23.0	38.0	30.0	35.4	35.0	27.0	8.0
155-24	24.0	38.0	30.0	35.4	35.0	27.0	8.0
155-25	25.0	40.0	33.0	38.2	35.5	27.0	8.5
155-28	28.0	46.0	38.0	43.3	39.0	30.0	9.0
155-29	29.0	46.0	38.0	43.3	39.0	30.0	9.0
155-30	30.0	46.0	38.0	43.3	39.0	30.0	9.0
155-32	32.0	46.0	38.0	43.3	39.0	30.0	9.0
155-33	33.0	48.0	45.0	53.5	50.5	39.0	11.5
155-35	35.0	50.0	45.0	53.5	50.5	39.0	11.5
155-38	38.0	58.0	52.0	60.5	50.5	39.0	11.5
155-40	40.0	58.0	52.0	60.5	50.5	39.0	11.5

**Specification:**

No.	配件/DESCRIPTION	材料/MATERIAL
1	O形圈/Oring	NBR / HNBR / VITON
2	静环/Stationary ring	Graphite carbon/SIC
3	动环/Rotary ring	Alumina ceramic/SIC
4	O形圈/Oring	NBR / HNBR / VITON
5	O形圈/Oring	NBR / HNBR / VITON
6	传动套/Retainer	SUS304
7	弹簧/Spring	SUS304



# RM 560A RM 560B




**RM 560A**

**Specification:**

No.	配件/DESCRIPTION	材料/MATERIAL
1	橡胶套/Cup Gasket	NBR / HNBR / VITON
2	静环/Stationary ring	Alumina ceramic/SIC
3	动环/Rotary ring	Graphite carbon/SIC
4	传动套/Retainer	SUS304
5	橡胶波纹管/Bellows	NBR / HNBR / VITON
6	紧圈/Drive ring	SUS304
7	弹簧/Spring	SUS304
8	弹簧座/Spring seat	SUS304

型号	d	d3	d7	L	L3	L4
RM 560A-10	10	23.5	24	25	18	7
RM 560A-11	11	23.5	24	25	18	7
RM 560A-12	12	26	26	25	18	7
RM 560A-14	14	28	28	25.5	18.5	7
RM 560A-15	15	28	28	29.5	22.5	7
RM 560A-16	16	30	32	33.5	23.5	10
RM 560A-18	18	32.5	35	36.5	26.5	10
RM 560A-19	19	32.5	35	36.5	26.5	10
RM 560A-20	20	35.5	38	38	28	10
RM 560A-22	22	37.5	40	40.3	30.3	10
RM 560A-24	24	42	44	39.3	29.3	10
RM 560A-25	25	42	44	39.3	29.3	10
RM 560A-28	28	45.5	46	40	30	10
RM 560A-30S	30	46	45	38.2	30.7	7.5
RM 560A-30L	30	48	50	40	30	10
RM 560A-32	32	50	54	40	30	10
RM 560A-35	35	54.5	58	42	32	10
RM 560A-38	38	58.5	60	42.6	32.6	10
RM 560A-40	40	62.5	64	42.6	32.6	10
RM 560A-45	45	66.5	66	45	35	10
RM 560A-50	50	72.5	72	54.6	44.6	10
RM 560A-55S	55	72.5	75	59.4	47.4	12
RM 560A-55L	55	75	78	59.8	47.8	12
RM 560A-60	60	80	80	63	51	12

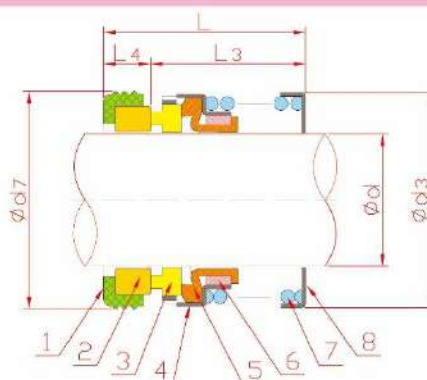

**Application:**

压力: 1MPa      Pressure: 1MPa  
 线速度: 12米/秒      Speed: 12M/S  
 温度: -30°C ~ 200°C      Temperature: -30°C ~ 200°C



RM 560A-65	65	85	85	64	51	13
RM 560A-70	70	92	92	60	49	11
RM 560A-80	80	105	105	70	58	12
RM 560A-90	90	115	115	75	61	14
RM 560A-100	100	125	125	75	61	14

型号	d	d3	d7	L	L3	L4
RM 560B- <sup>3</sup> / <sub>8</sub> "	9.525	21.5	22.225	28.6	22.2	6.4
RM 560B- <sup>1</sup> / <sub>2</sub> "	12.700	22.8	25.400	28.6	22.2	6.4
RM 560B- <sup>5</sup> / <sub>8</sub> "	15.875	26.5	31.750	32.5	23.8	8.7
RM 560B- <sup>3</sup> / <sub>4</sub> "	19.050	30	34.925	32.5	23.8	8.7
RM 560B- <sup>7</sup> / <sub>8</sub> "	22.225	37.5	38.100	34.1	25.4	8.7
RM 560B-1"	25.400	39.5	41.275	36.5	27	9.5
RM 560B-1 <sup>1</sup> / <sub>8</sub> "	28.575	44	44.450	38.1	28.6	9.5
RM 560B-1 <sup>1</sup> / <sub>4</sub> "	31.750	46.5	47.625	38.1	28.6	9.5
RM 560B-1 <sup>3</sup> / <sub>8</sub> "	34.925	54.5	50.800	39.7	30.2	9.5
RM 560B-1 <sup>1</sup> / <sub>2</sub> "	38.100	56.5	53.975	39.7	30.2	9.5
RM 560B-1 <sup>5</sup> / <sub>8</sub> "	41.275	56.5	60.325	47.6	36.5	11.1
RM 560B-1 <sup>3</sup> / <sub>4</sub> "	44.450	63	63.500	47.6	36.5	11.1
RM 560B-1 <sup>7</sup> / <sub>8</sub> "	47.625	72	66.675	50.8	39.7	11.1
RM 560B-2"	50.800	72	69.850	50.8	39.7	11.1
RM 560B-2 <sup>1</sup> / <sub>8</sub> "	53.975	76	76.200	57.1	42.8	14.3
RM 560B-2 <sup>1</sup> / <sub>4</sub> "	57.150	80	79.375	57.1	42.8	14.3
RM 560B-2 <sup>3</sup> / <sub>8</sub> "	60.325	80	82.550	60.3	46.0	14.3
RM 560B-2 <sup>1</sup> / <sub>2</sub> "	63.500	85	85.725	60.3	46.0	14.3
RM 560B-2 <sup>5</sup> / <sub>8</sub> "	66.675	92	85.725	65.1	49.2	15.9
RM 560B-2 <sup>3</sup> / <sub>4</sub> "	69.850	92	88.900	65.1	49.2	15.9
RM 560B-2 <sup>7</sup> / <sub>8</sub> "	73.025	99	95.300	68.3	52.4	15.9
RM 560B-3"	76.200	99	98.425	68.3	52.4	15.9

# RM 560D



RM 560D

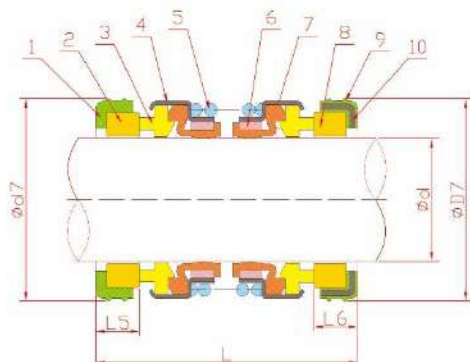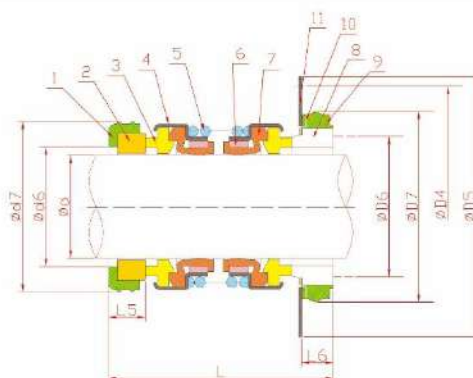

**Application:**

压力: 0.3MPa      Pressure: 0.3MPa  
 线速度: 10米/秒      Speed: 10M/S  
 温度: -30°C ~ 200°C      Temperature: -30°C ~ 200°C

**Specification:**

**Specification:**

No.	配件/DESCRIPTION	材料/MATERIAL
1	橡胶套A/Cup Gasket A	NBR / HNBR / VITON
2	静环A/Stationary ring A	Alumina ceramic/SIC
3	动环/Rotary ring	Graphite carbon/SIC
4	传动套/Retainer	SUS304
5	弹簧/Spring	SUS304
6	紧圈/Drive ring	SUS304
7	橡胶波纹管/Bellows	NBR / HNBR / VITON
8	静环B/Stationary ring B	Alumina ceramic/SIC
9	橡胶套B/Cup Gasket B	NBR / HNBR / VITON
10	骨架/Framework	SUS304/Lron

No.	配件/DESCRIPTION	材料/MATERIAL
1	橡胶套A/Cup Gasket A	NBR / HNBR / VITON
2	静环A/Stationary ring A	Alumina ceramic/SIC
3	动环/Rotary ring	Graphite carbon/SIC
4	传动套/Retainer	SUS304
5	弹簧/Spring	SUS304
6	紧圈/Drive ring	SUS304
7	橡胶波纹管/Bellows	NBR / HNBR / VITON
8	静环B/Stationary ring B	Alumina ceramic/SIC
9	橡胶套B/Cup Gasket B	NBR / HNBR / VITON
10	骨架/Framework	SUS304/Lron
11	挡圈/Closing ring	SUS304/Lron

型号	d	d7	D7	L	L5	L6
560D-13	13	25	25	36	5	5
560D-14	14	30	30	36	5	5
560D-15	15	30	30	36	5	5
560D-16	16	30	30	36	5	5

型号	d	d6	d7	D4	D5	D7	L	L5	L6
560D-18	18	21	35	50	62	38	49	7	7
560D-19	19	21	35	50	62	38	49	7	7
560D-20	20	23	38	60	72	44	49	7	7
560D-25	25	28	44	60	72	50	51	7	7
560D-30	30	33	50	70	82	57	59	8	9
560D-35	35	38	58	80	94	64	61	9	9
560D-40	40	43	64	85	100	70	64	9	10
560D-45	45	48	66	90	105	70	65	9	10
560D-50	50	53	72	95	109	80	69	9	10



## RM BIA 560C




RM BIA 560C

**Specification:**

No.	配件/DESCRIPTION	材料/MATERIAL
1	橡胶套/Cup Gasket	NBR / HNBR / VITON
2	静环/Stationary ring	Alumina ceramic/SiC
3	动环/Rotary ring	Graphite carbon/SiC
4	传动套/Retainer	SUS304
5	橡胶波纹管/Bellows	NBR / HNBR / VITON
6	紧圈/Drive ring	SUS304
7	弹簧/Spring	SUS304
8	弹簧座/Spring seat	SUS304

型号	d	d3	d7	L	L3	L4
RM BIA-14	14	27	30	23.7	18.7	5
RM BIA-16	16	28.5	32	26	21	5
RM BIA-18	18	30.5	35	30	22.5	7.5
RM BIA-20	20	32.5	35	29	21	8
RM BIA-25	25	39	40	33.5	25.5	8
RM BIA-28	28	42	43	33.5	25.5	8
RM BIA-30	30	44	45	34.5	25.5	9
RM BIA-32	32	46	48	42.5	33.5	9
RM BIA-33	33	47	48	42.5	33.5	9
RM BIA-35	35	49	50	42.5	33.5	9
RM BIA-38	38	54	56	42.5	33.5	9
RM BIA-40	40	56	58	42.5	33.5	9
RM BIA-43	43	59	61	46	36.5	9.5
RM BIA-45	45	61	63	47.5	38	9.5
RM BIA-48	48	64	66	47.5	38	9.5
RM BIA-50	50	66	70	47.5	38	9.5
RM BIA-53	53	69	73	50.5	41	9.5
RM BIA-55	55	71	75	50.5	41	9.5
RM BIA-58	58	78	78	51.5	42	9.5
RM BIA-60	60	80	80	51.5	42	9.5
RM BIA-65	65	85	85	52	42	10
RM BIA-70	70	90	92	56	45	11

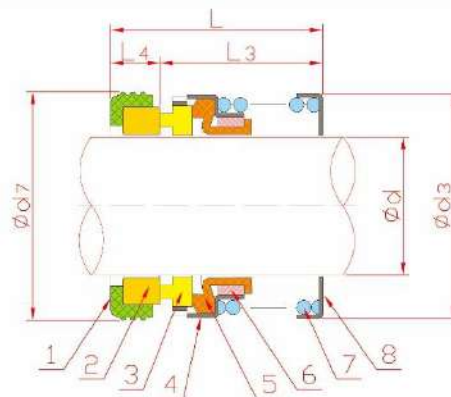

**Application:**


压力: < 1.0MPa      Pressure: < 1.0MPa  
 线速度: < 10米/秒      Speed: < 10M/S  
 温度: -20°C ~ 200°C      Temperature: -20°C ~ 200°C

型号	d	d3	d7	L	L3	L4
RM 560C-16	16	26.5	27	36	25.7	10.3
RM 560C-18	18	30.5	33	37.5	27.2	10.3
RM 560C-20	20	34	35	37.5	27.2	10.3
RM 560C-22	22	34	37	38.2	27.2	11
RM 560C-24	24	40	39	40	29	11
RM 560C-25	25	40	40	40	29	11
RM 560C-28	28	44.5	43	42.5	31.5	11
RM 560C-30	30	46.5	45	42.5	31.5	11
RM 560C-32	32	46.5	48	42.5	31.5	11
RM 560C-33	33	50.5	48	42.5	31.5	11
RM 560C-35	35	51.5	50	42.5	31.5	11
RM 560C-38	38	54	56	45	34	11
RM 560C-40	40	58	58	45	32.3	12.7
RM 560C-43	43	61.5	61	45	32.3	12.7
RM 560C-45	45	61.5	63	45	32.3	12.7
RM 560C-48	48	65.5	66	45	32.3	12.7
RM 560C-50	50	70.5	70	47.5	34.8	12.7
RM 560C-53	53	74	73	47.5	33.3	14.2
RM 560C-55	55	76	75	47.5	33.3	14.2
RM 560C-58	58	79	78	52.5	38.3	14.2
RM 560C-60	60	82	80	52.5	38.3	14.2
RM 560C-63	63	87	83	52.5	38.3	14.2
RM 560C-65	65	87	85	52	36	16
RM 560C-68	68	91.5	90	52	36	16
RM 560C-70	70	91.5	92	60	44	16
RM 560C-73	73	99	93	60	44	16
RM 560C-75	75	99	97	60	44	16

# RM 156



RM 156

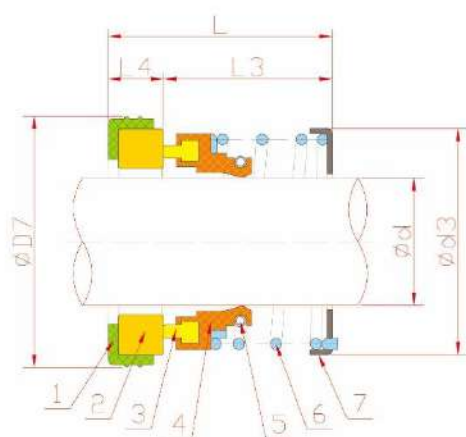

■ Application:

压力: 0.5MPa      Pressure: 0.5MPa  
 线速度: 10米/秒      Speed: 10M/S  
 温度: -30°C ~ 200°C      Temperature: -30°C ~ 200°C

型号	d	d3	d7	L	L3	L4
RM 156-8	8	16.0	18/21	18	13.5	4.5
RM 156-9	9	20.0	21	23	16	7.0
RM 156-10	10	20.0	22/24	23	16	7.0
RM 156-11	11	20.0	24	23	16	7.0
RM 156-12	12	22.5	26	24	17	7.0
RM 156-13	13	22.5	26	24	17	7.0
RM 156-14	14	24.5	28/30	25	18	7.0
RM 156-15	15	24.5	28/30	25	18	7.0
RM 156-16	16	28.5	32	27	19	8.0
RM 156-17	17	28.5	32	27	19	8.0
RM 156-18	18	31.5	35	29	21	8.0
RM 156-19	19	31.5	35	29	21	8.0
RM 156-20	20	33.5	38	31	23	8.0
RM 156-22	22	34.5	40	32	24	8.0
RM 156-25	25	37.5	44	33	24	9.0
RM 156-28	28	40.5	46	34	25	9.0
RM 156-30	30	44.5	50	35	26	9.0
RM 156-32	32	47.5	54	37	28	9.0
RM 156-35	35	50.5	58	40	30	10.0
RM 156-38	38	53.5	60	42	32	10.0
RM 156-40	40	56.5	64	43	33	10.0
RM 156-45	45	61.5	66	45	35	10.0
RM 156-50	50	66.5	72	47	37	10.0

■ Specification:

No.	配件/DESCRIPTION	材料/MATERIAL
1	橡胶套/Cup Gasket	NBR
2	静环/Stationary ring	Alumina ceramic/SiC
3	动环/Rotary ring	Graphite carbon/SiC
4	橡胶波纹管/Bellows	NBR
5	拉簧/Extension spring	SUS304
6	弹簧/Spring	SUS304
7	弹簧座/Spring seat	SUS304



# RM E RM70




## RM E

**Specification:**

No.	配件/DESCRIPTION	材料/MATERIAL
1	橡胶套/Cup Gasket	NBR / HNBR / VITON
2	静环/Stationary ring	Alumina ceramic/SIC
3	动环/Rotary ring	Graphite carbon/SIC
4	橡胶波纹管/Bellows	NBR / HNBR / VITON
5	传动套/Retainer	SUS304
6	紧圈/Drive ring	SUS304
7	弹簧/Spring	SUS304
8	橡胶方圈/Rubber square ring	NBR / HNBR / VITON

**Application:**

压力: 0.6MPa                      Pressure: 0.6MPa  
 线速度: 10米/秒                Speed:10M/S  
 温度: -30℃ ~ 200℃            Temperature: -30℃~200℃

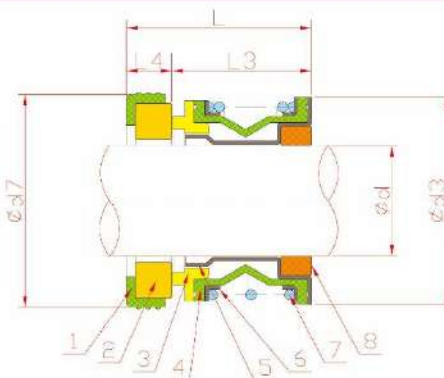

型号	d	d3	d7	L	L3	L4
RM E-3/8"	9.52	23.80	22.22	22.22	16.02	6.20
RM E-1/2"	12.70	26.97	25.40	22.80	16.60	6.20
RM E-5/8"	15.88	30.94	30.10	26.50	17.30	8.70
RM E-5/8H	15.88	30.94	31.75	30.00	19.70	10.3
RM E-3/4"	19.05	34.11	34.93	30.00	19.70	10.3
RM E-7/8"	22.23	42.85	41.28	31.73	20.63	11.1
RM E-1"	25.40	42.85	41.28	31.73	20.63	11.1




## RM 70

**Specification:**

No.	配件/DESCRIPTION	材料/MATERIAL
1	橡胶套/Cup Gasket	NBR / HNBR / VITON
2	静环/Stationary ring	Alumina ceramic/SIC
3	动环/Rotary ring	Graphite carbon/SIC
4	传动套/Retainer	SUS304
5	橡胶波纹管/Bellows	NBR / HNBR / VITON
6	紧圈/Drive ring	SUS304
7	弹簧/Spring	SUS304
8	弹簧座/Spring seat	SUS304

**Application:**

压力: 0.6MPa                      Pressure: 0.6MPa  
 线速度: 10米/秒                Speed:10M/S  
 温度: -30℃ ~ 200℃            Temperature: -30℃~200℃

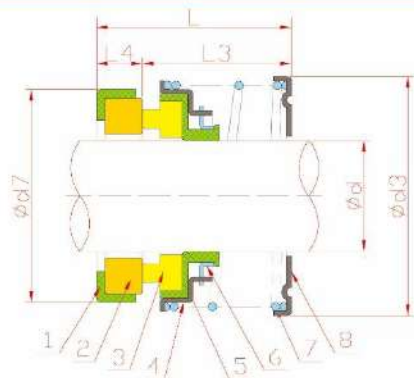

型号	d	d3	d7	L	L3	L4
RM 70-13	13	32	29.5	32	24.0	8.0
RM 70-14	14	32	29.5	32	24.0	8.0
RM 70-15A	15	32	29.5	26	18.0	8.0
RM 70-15	15	32	29.5	32	24.0	8.0
RM 70-16A	16	32	29.5	26	18.0	8.0
RM 70-16	16	32	29.5	32	24.0	8.0
RM 70-1"	25.4	43	41.275	39.7	30.2	9.5

RM 103 RM 208




**RM 103**

■ Specification:

No.	配件/DESCRIPTION	材料/MATERIAL
1	橡胶套/Cup Gasket	NBR / HNBR / VITON
2	静环/Stationary ring	Alumina ceramic/SiC
3	动环/Rotary ring	Graphite carbon/SiC
4	传动套/Retainer	SUS304
5	橡胶波纹管/Bellows	NBR / HNBR / VITON
6	弹簧/Spring	SUS304
7	弹簧座/Spring seat	SUS304

■ Application:

压力: 0.8MPa                      Pressure: 0.8MPa  
 线速度: 5米/秒                      Speed:5M/S  
 温度: -30°C ~ 200°C                      Temperature: -30°C~200°C

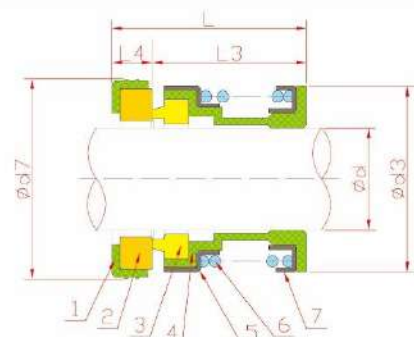

型号	d	d3	d7	L	L3	L4
RM 103-10	10	22	26	20.5	15	5.5
RM 103-12	12	23.5	26	20.5	15	5.5
RM 103-12L	12	23.5	26	22.5	15	7.5
RM 103-14	14	27	30	20.5	15	5.5
RM 103-16	16	30	35	20.5	15	5.5
RM 103-17	17	30	35	20.5	15	5.5
RM 103-18	18	30	35	20.5	15	5.5




**RM 208**

■ Specification:

No.	配件/DESCRIPTION	材料/MATERIAL
1	橡胶套/Cup Gasket	NBR / HNBR / VITON
2	静环/Stationary ring	Alumina ceramic/SiC
3	动环/Rotary ring	Graphite carbon/SiC
4	橡胶波纹管/Bellows	NBR / HNBR / VITON
5	传动套/Retainer	SUS304
6	紧圈/Drive ring	SUS304
7	弹簧/Spring	SUS304

■ Application:

压力: 1.2MPa                      Pressure: 1.2MPa  
 线速度: 10米/秒                      Speed:10M/S  
 温度: -30°C ~ 200°C                      Temperature: -30°C~200°C

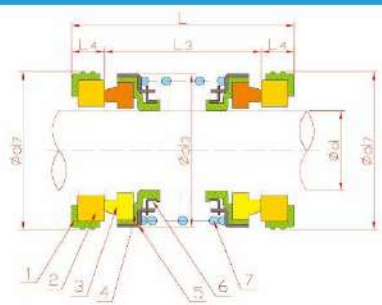

型号	d	d3	d7	L	L3	L4
RM 208-10	10	20	21.0	30	19	5.5
RM 208-12	12	22	23/26	30/32	19/21	5.5
RM 208-14	14	25	26/28	35/38	24/27	5.5
RM 208-15	15	27	28/30	38	27	5.5
RM 208-16	16	27	28/30	38	27	5.5
RM 208-17	17	32	33/35	38/48	26/32	6/8
RM 208-18	18	32	33/35	38/48	26/32	6/8
RM 208-20	20	34	35/36	40/48	28/32	6/8
RM 208-22	22	36	37/38	45	33/29	6/8
RM 208-25	25	39	40/41	48	34/32	7/8
RM 208-28	28	42	43	51	35	8
RM 208-30	30	44	45	51	35	8
RM 208-35	35	49	50	51	35	8
RM 208-40	40	56	58	58/61	39/42	9.5
RM 208-45	45	61	63	58/61	39/42	9.5





## RM 104

## RM 108




**RM 104**

**Specification:**

No.	配件/DESCRIPTION	材料/MATERIAL
1	橡胶套/Cup Gasket	NBR / HNBR / VITON
2	静环/Stationary ring	Graphite carbon/SIC
3	动环/Rotary ring	Alumina ceramic/SIC
4	传动套/Retainer	SUS304
5	橡胶波纹管/Bellows	NBR / HNBR / VITON
6	弹簧/Spring	SUS304
7	弹簧座/Spring seat	SUS304

**Application:**

压力: 0.8MPa                      Pressure: 0.8MPa  
 线速度: 5米/秒                      Speed: 5M/S  
 温度: -30°C ~ 200°C                      Temperature: -30°C ~ 200°C




型号	d	d3	d7	L	L3	L4
RM 104-9	9	20	22	20	14.5	5.5
RM 104-10	10	20	22	20	14.5	5.5
RM 104-11	11	22	24	20	14.5	5.5
RM 104-12	12	22	24	20	14.5	5.5
RM 104-14	14	24	26	25	18	7
RM 104-15	15	26	28	25	18	7
RM 104-16	16	26	28	25	18	7
RM 104-17	17	30.5	34	25	18	7
RM 104-18	18	30.5	34	25	18	7
RM 104-19	19	33	36	25	18	7
RM 104-20	20	33	36	25	18	7
RM 104-22	22	36	38	25	18	7
RM 104-25	25	39	41	37	28	9
RM 104-30	30	44	46	37	28	9
RM 104-35	35	50.5	51	37	28	9
RM 104-40	40	56	60	40	29.5	10.5
RM 104-45	45	64	65	40	29.5	10.5



**RM 108**

型号	d	d3	d7	L	L3	L4
RM 108-8	8.0	17.0	18.0	20.0	15.5	4.5
RM 108-9	9.0	20.0	21.0	20.0	15.5	4.5
RM 108-10	10.0	20.0	21.0	20.0	15.5	4.5
RM 108-11	11.0	22.0	23.0	20.0	15.5	4.5
RM 108-12	12.0	22.0	23.0	20.0	15.5	4.5
RM 108-14	14.0	25.0	25.0	25.0	19.5	5.5
RM 108-15	15.0	27.0	27.0	25.0	19.5	5.5
RM 108-16	16.0	27.0	27.0	25.0	19.5	5.5
RM 108-17	17.0	32.0	33.0	25.0	18.0	7.0
RM 108-18	18.0	32.0	33.0	25.0	18.0	7.0
RM 108-19	19.0	33.0	35.0	25.0	18.0	7.0
RM 108-20	20.0	33.0	35.0	25.0	18.0	7.0
RM 108-22	22.0	36.0	37.0	28.0	21.0	7.0
RM 108-25	25.0	39.0	40.0	32.0	25.0	7.0
RM 108-28	28.0	42.0	43.0	35.0	28.0	7.0
RM 108-30	30.0	44.0	45.0	35.0	28.0	7.0
RM 108-35	35.0	49.0	50.0	37.0	30.0	7.0
RM 108-40	40.0	56.0	58.0	40.0	32.0	8.0
RM 108-45	45.0	61.0	63.0	40.0	32.0	8.0
RM 108-50	50.0	67.0	70.0	45.0	36.5	8.5
RM 108-55	55.0	72.0	75.0	45.0	36.5	8.5

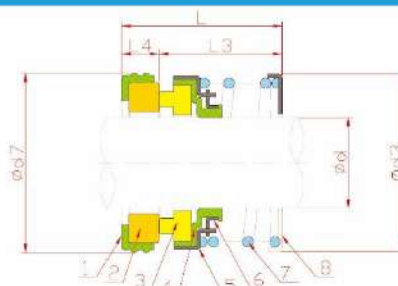

**Specification:**

No.	配件/DESCRIPTION	材料/MATERIAL
1	橡胶套/Cup Gasket	NBR / HNBR / VITON
2	静环/Stationary ring	Alumina ceramic/SIC
3	动环/Rotary ring	Graphite carbon/SIC
4	橡胶波纹管/Bellows	NBR / HNBR / VITON
5	传动套/Retainer	SUS304
6	紧圈/Drive ring	SUS304
7	弹簧/Spring	SUS304
8	弹簧座/Spring seat	SUS304

**Application:**

压力: 1MPa                      Pressure: 1MPa  
 线速度: 10米/秒                      Speed: 10M/S  
 温度: -30°C ~ 200°C                      Temperature: -30°C ~ 200°C

RM 166 RM 166T




RM 166

Specification:

No.	配件/DESCRIPTION	材料/MATERIAL
1	橡胶套/Cup Gasket	NBR / HNBR / VITON
2	静环/Stationary ring	Alumina ceramic/SiC
3	动环/Rotary ring	Graphite carbon/SiC
4	橡胶波纹管/Bellows	NBR / HNBR / VITON
5	传动套/Retainer	SUS304
6	弹簧/Spring	SUS304
7	弹簧座/Spring seat	SUS304

Application:

压力: 1MPa Pressure: 1MPa  
 线速度: 10米/秒 Speed: 10M/S  
 温度: -30°C ~ 200°C Temperature: -30°C~200°C

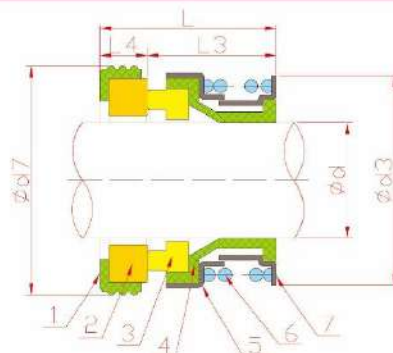

型号	d	d3	d7	L	L3	L4
RM 166-3/8"	9.53	23.3	22.2	23.8	16.7	7.1
RM 166-1/2"	12.00	23.3	24.0	20.8	16.3	4.5
RM 166-1/2"	12.70	23.3	25.4	23.0	16.7	6.3
RM 166-14	14.00	30.4	30.0	27.1	18.4	8.7
RM 166-5/8"	15.88	30.4	31.8	28.5	18.2	10.3
RM 166-3/4"	19.05	33.0	34.9	28.5	18.2	10.3
RM 166-7/8"	22.23	36.3	38.1	30.9	20.6	10.3
RM 166-1"	25.40	39.4	41.3	31.7	20.6	11.1




RM 166T

Specification:

No.	配件/DESCRIPTION	材料/MATERIAL
1	橡胶套/Cup Gasket	NBR / HNBR / VITON
2	静环/Stationary ring	Alumina ceramic/SiC
3	动环/Rotary ring	Graphite carbon/SiC
4	橡胶波纹管/Bellows	NBR / HNBR / VITON
5	传动套/Retainer	SUS304
6	紧圈/Drive ring	SUS304
7	弹簧/Spring	SUS304
8	弹簧座/Spring seat	SUS304

Application:

压力: 1MPa Pressure: 1MPa  
 线速度: 10米/秒 Speed: 10M/S  
 温度: -30°C ~ 200°C Temperature: -30°C~200°C

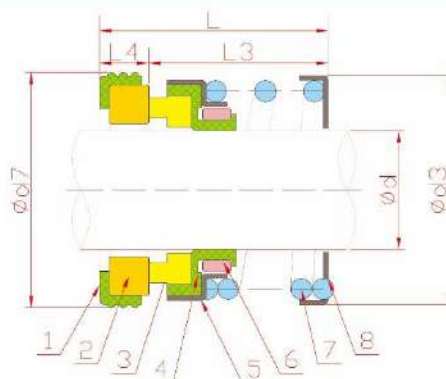


型号	d	d3	d7	L	L3	L4
RM 166T-3/8"	9.53	23.3	24.6	34.14	25.4	8.74
RM 166T-1/2"	12.70	23.3	27.8	34.14	25.4	8.74
RM 166T-5/8"	15.88	30.4	30.9	35.71	25.4	10.31
RM 166T-3/4"	19.05	33.1	33.1/34.1	31.75/35.71	25.4	6.35/10.31
RM 166T-3/4"A	19.05	33.1	33.1	25.4	19.05	6.35
RM 166T-7/8"	22.23	36.3	37.3	35.71	25.4	10.31
RM 166T-25	25.00	39.4	44	41.3	31	10.3
RM 166T-1"	25.40	39.4	41.3/40.5	43.31	33	10.31
RM 166T-30	30.00	48	51	44	32	12




## RM 580 RM FBD(G3)



RM 580

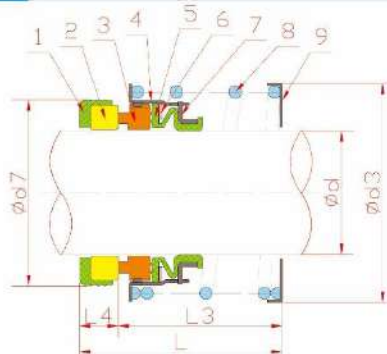

RM FBD(G3)

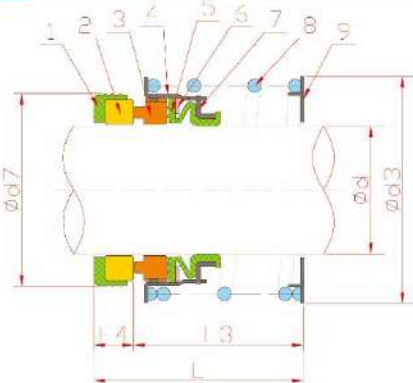

**Specification:**

No.	配件/DESCRIPTION	材料/MATERIAL
1	橡胶套/Cup Gasket	NBR / HNBR / VITON
2	静环/Stationary ring	Alumina ceramic/SiC
3	动环/Rotary ring	Graphite carbon/SiC
4	传动套/Retainer	SUS304
5	橡胶波纹管/Bellows	NBR / HNBR / VITON
6	挡圈/Closing ring	SUS304
7	紧圈/Drive ring	SUS304
8	弹簧/Spring	SUS304
9	弹簧座/Spring seat	SUS304

**Application:**

压力: 2.8MPa      Pressure: 2.8MPa  
 线速度: 13米/秒      Speed: 13M/S  
 温度: -30℃ ~ 200℃      Temperature: -30℃ ~ 200℃

型号	d	d3	d7	L	L3	L4
RM 580-3/8"	9.525	28	24.60	33.7	25	8.7
RM 580-1/2"	12.700	32	27.80	33.7	25	8.7
RM 580-5/8"	15.875	35	30.95	35.3	25	10.3
RM 580-3/4"	19.050	40	34.15	35.3	25	10.3
RM 580-7/8"	22.225	43	37.30	35.3	25	10.3
RM 580-1"	25.400	47	40.50	36.9	25	11.9
RM 580-1 1/8"	28.575	56	47.65	44.9	33	11.9
RM 580-1 1/4"	31.750	59	50.80	44.9	33	11.9
RM 580-1 3/8"	34.925	63	54.00	44.9	33	11.9
RM 580-1 1/2"	38.100	67	57.15	44.9	33	11.9
RM 580-1 5/8"	41.275	71	60.35	44.9	33	11.9
RM 580-1 3/4"	44.450	74	63.50	52.9	41	11.9
RM 580-1 7/8"	47.625	77	66.70	52.9	41	11.9
RM 580-2"	50.800	81	69.85	54.5	41	13.5
RM 580-2 1/8"	53.970	84	73.05	54.5	41	13.5
RM 580-2 1/4"	57.150	88	76.20	54.5	41	13.5
RM 580-2 3/4"	60.320	91	79.40	54.5	41	13.5
RM 580-2 1/2"	63.500	94	82.55	54.5	41	13.5

**Application:**

压力: ≤0.5MPa      Pressure: ≤0.5MPa  
 线速度: ≤16米/秒      Speed: ≤16M/S  
 温度: -20℃ ~ 100℃      Temperature: -20℃ ~ 100℃

型号	d	d3	d7	L	L3	L4
RM FBD-16	16	34	30	33	25	8
RM FBD-18	18	36.8	32	33	25	8
RM FBD-20	20	38.8	34	33	25	8
RM FBD-22	22	41.5	36	33	25	8
RM FBD-25	25	44.5	39	34	26	8
RM FBD-28	28	48.5	43	34	26	8
RM FBD-30	30	52	48	34	26	8
RM FBD-35	35	57	53	40	30	10
RM FBD-40	40	67	58	44	34	10
RM FBD-45	45	73	63	46	36	10
RM FBD-50	50	79	68	51	41	10
RM FBD-55	55	84	73	53	41	12
RM FBD-60	60	90	79	53	41	12
RM FBD-65	65	98.5	86	61	49	12
RM FBD-70	70	103.5	91	64	52	12
RM FBD-75	75	110.5	96	64	52	12
RM FBD-80	80	120	105	70	56	14
RM FBD-85	85	125	110	70	56	14
RM FBD-90	90	132	115	70	56	14
RM FBD-95	95	137	120	70	56	14
RM FBD-100	100	144	125	76	62	14
RM FBD-110	110	157	135	78	62	16
RM FBD-120	120	169.5	145	88	72	16

## RM 551




RM 551

NO.	配件/Description	材料/MATERIAL
1	O形圈/Oring	NBR / HNBR / VITON
2	静环/Stationaryring	Graphite carbon/SIC
3	动环/ROTaryring	SIC/TC
4	传动套/Retainer	SUS304
5	O形圈/Oring	NBR / HNBR / VITON
6	挡圈/Closingr	SUS304
7	弹簧/Spring	SUS304


■ Application:

压力: 1.2MPa      Pressure: 1.2MPa  
 线速度: 15米/秒      Speed: 15M/S  
 温度: -30℃ ~ 200℃      Temperature: -30℃~200℃

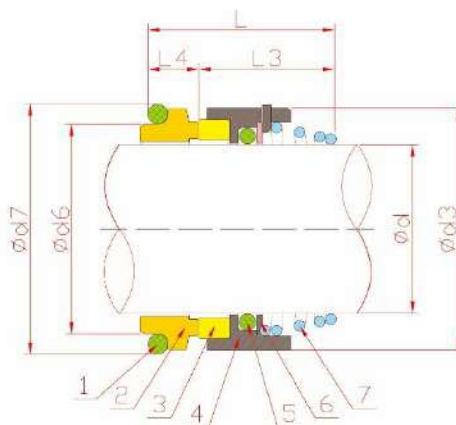




# RM 551



551A



551B(G4)



551C(G9)  
(DIN24960)



551D(G6)  
(DIN24960)

型号 Model	RM 551A							RM 551B					RM 551C					RM 551D						
	d	d3	d6	d7	L	L3	L4	d6	d7	L	L3	L4	d6	d7	L	L3	d8	L4	d6	d7	L	L3	L4	
RM 551-8	8	18	13	17.1	20.5	15	5.5	15.1	19.2	18.9	11.9	7							17	21	25.5	15.5	3	10
RM 551-10	10	19	14	18.1	20.5	15	5.5	15.1	19.2	22.1	15.5	6.6												
RM 551-11	11	20	16.5	20.6	23.5	18	5.5																	
RM 551-12	12	21	16.5	20.6	23.5	18	5.5	17.5	21.6	21.1	15.5	5.6							19	23	26	16	3	10
RM 551-13	13	22	19	23.1	28	22	6																	
RM 551-14	14	23	19	23.1	28	22	6	20.5	24.6	21.1	15.5	5.6							21	25	26.5	16.5	3	10
RM 551-15	15	24	21	26.9	29	22	7	20.5	24.6	24.1	17.5	6.6												
RM 551-16	16	26	21	26.9	30	23	7	22	28	25	17.5	7.5							23	27	28	18	3	10
RM 551-17	17	26	21	26.9	30	23	7																	
RM 551-18	18	29	25	30.9	32	24	8	24	30	26.5	18.5	8							27	33	31	19.5	3	11.5
RM 551-19	19	31	25	30.9	33	25	8	29.5	35	27.5	20	7.5												
RM 551-20	20	31	25	30.9	33	25	8	29.5	35	27.5	20	7.5							29	35	33.5	22	3	11.5
RM 551-22	22	33	30	35.4	33	25	8	29.5	35	29	21.5	7.5							31	37	33	21.5	3	11.5
RM 551-23	23	36	30	35.4	35	27	8																	
RM 551-24	24	35	30	35.4	35	27	8	32	38	30.5	23	7.5							33	39	35	23.5	3	11.5
RM 551-25	25	36	33	38.2	35.5	27	8.5	32	38	32	24.5	7.5							34	40	38	26.5	3	11.5
RM 551-26	26	39	33	38.2	35.5	27	8.5	34	40	32.5	24.5	8												
RM 551-28	28	40	38	43.3	38	29	9	36	42	33.5	24.5	9							37	43	38	26.5	3	11.5
RM 551-30	30	43	38	43.3	39	30	9	39.2	45	35	24.5	10.5							39	45	38	26.5	3	11.5
RM 551-32	32	46	38	43.3	39	30	9	42.2	48	38.5	28	10.5							42	48	40	28.5	3	11.5
RM 551-33	33	47	45	53.5	50.5	39	11.5	42.2	50	39	27.5	11.5							42	48	40	28.5	3	11.5
RM 551-34	34	48	45	53.5	50.5	39	11.5																	
RM 551-35	35	49	45	53.5	50.5	39	11.5	46.2	52	39	28	11							44	50	40	28.5	3	11.5
RM 551-36	36	50	45	53.5	50.5	39	11.5																	
RM 551-38	38	53	52	60.5	50.5	39	11.5	49.2	55	41.3	31	10.3							49	56	47.5	33.5	4	14
RM 551-40	40	56	52	60.5	50.5	39	11.5	52.2	58	44.8	34	10.8							51	58	50	36	4	14
RM 551-42	42	59	52	60.5	50.5	39	11.5	53.3	62	47	35	12												
RM 551-43	43	59	52	60.5	52.5	41	11.5	53.3	62	47	35	12							54	61	52.5	38.5	4	14
RM 551-44	44	60	57	65.5	52.5	41	11.5																	
RM 551-45	45	61	57	65.5	52.5	41	11.5	55.3	64	48.1	36.5	11.6							56	63	53.5	39.5	4	14
RM 551-48	48	64	57	65.5	52.5	41	11.5	59.8	68.4	53.6	42	11.6							58	66	60	46	4	14
RM 551-50	50	66	64	72.5	56.5	45	11.5	60.8	69.3	54.6	43	11.6							62	70	60	45	4	15
RM 551-53	53	69																	65	73	62	47	4	15
RM 551-55	55	71	64	72.5	58.5	47	11.5	66.5	75.4	60.3	47	13.3							67	75	64	49	4	15
RM 551-58	58	76						69.5	78.4	63.3	52	11.3							70	78	70	55	4	15
RM 551-60	60	78	72	79.3	60.5	49	11.5	71.5	80.4	64.3	51	13.3							72	80	70	55	4	15
RM 551-63	63	83																	75	83	70	55	4	15
RM 551-65	65	84	77	84.5	62.5	51	11.5	76.5	85.4	65	52	13							77	85	70	55	4	15
RM 551-68	68	88						82.5	91.5	66.7	53	13.7							82	90	73	55	4	18
RM 551-70	70	90	82	89.5	62.5	51	11.5	83	92	67	54	13							83	92	75	57	4	18
RM 551-75	75	95	87	94.5	68.5	57	11.5	90.2	99	69	54.2	14.8							88	97	80	62	4	18
RM 551-80	80	100	92	99.5	70.5	59	11.5	95.2	104	73	58.2	14.8							95	105	80	62	4	18
RM 551-85	85	109	96.5	105.5	72.5	59	13.5																	
RM 551-90	90	114	102.5	111.5	75.5	62	13.5																	
RM 551-95	95	119	107.5	116.5	75.5	62	13.5																	
RM 551-100	100	124	110.5	119.5	88.5	75	13.5																	



# RM MG1





RM MG1

**Specification:**

No.	配件/DESCRIPTION	材料/MATERIAL
1	橡胶套/Cup Gasket	NBR / HNBR / VITON
2	静环/Stationary ring	Alumina ceramic/SiC
3	动环/Rotary ring	Graphite carbon/SiC
4	橡胶波纹管/Bellows	NBR / HNBR / VITON
5	弹簧座A/Spring seat A	SUS304
6	弹簧/Spring	SUS304
7	弹簧座B/Spring seat B	SUS304

**Application:**

压力: 1.2MPa      Pressure: 1.2MPa  
 线速度: 10米/秒      Speed: 10M/S  
 温度: -30°C ~ 200°C      Temperature: -30°C ~ 200°C

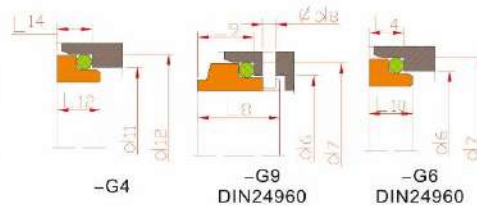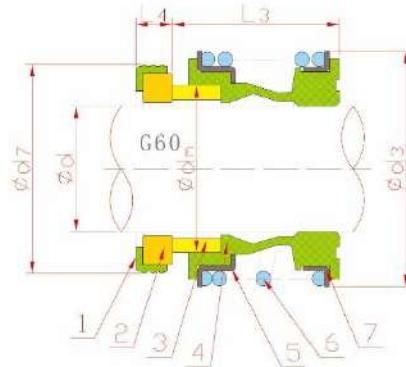

型号	d	d3	d6	d7	d8	d11	d12	dm	L3	L4	L8	L9	L10	L12	L14
RM MG1-8	8	21	17	21	3	/	/	/	14.0	6.0	/	/	/	/	/
RM MG1-10	10	22.5	17	21	3	15.5	19.2	15.7	14.5	6.6	17.5	10.0	7.5	7.5	6.6
RM MG1-12	12	25.0	19	23	3	17.5	21.6	17.7	15.0	6.6	17.5	10.0	7.5	6.5	5.6
RM MG1-14	14	28.5	21	25	3	20.5	24.6	19.7	17.0	6.6	17.5	10.0	7.5	6.5	5.6
RM MG1-15	15	28.5	/	/	/	20.5	24.6	20.8	17.0	/	/	/	/	7.5	6.6
RM MG1-16	16	28.5	23	27	3	22.0	28.0	21.0	17.0	6.6	17.5	10.0	7.5	8.5	7.5
RM MG1-18	18	32.0	27	33	3	24.0	30.0	23.7	19.5	7.5	19.5	11.5	8.5	9.0	8.0
RM MG1-19	19	37.0	/	/	/	/	/	26.7	21.5	/	/	/	/	/	/
RM MG1-20	20	37.0	29	35	3	29.5	35.0	26.7	21.5	7.5	19.5	11.5	8.5	8.5	7.5
RM MG1-22	22	37.0	31	37	3	29.5	35.0	27.7	21.5	7.5	19.5	11.5	8.5	8.5	7.5
RM MG1-24	24	42.5	33	39	3	32.0	38.0	31.2	22.5	7.5	19.5	11.5	8.5	8.5	7.5
RM MG1-25	25	42.5	34	40	3	32.0	38.0	31.2	23.0	7.5	19.5	11.5	8.5	8.5	7.5
RM MG1-28	28	49.0	37	43	3	36.0	42.0	35.0	26.5	7.5	19.5	11.5	8.5	10.0	9.0
RM MG1-30	30	49.0	39	45	3	39.2	45.0	37.0	26.5	7.5	19.5	11.5	8.5	11.5	10.5
RM MG1-32	32	53.5	42	48	3	42.2	48.0	40.2	27.5	7.5	19.5	11.5	8.5	11.5	10.5
RM MG1-33	33	53.5	42	48	3	44.2	50.0	40.2	27.5	7.5	19.5	11.5	8.5	12.0	11.0
RM MG1-35	35	57.0	44	50	3	46.2	52.0	43.2	28.5	7.5	19.5	11.5	8.5	12.0	11.0
RM MG1-38	38	59.0	49	56	4	49.2	55.0	46.2	30.0	9.0	22.0	14.0	10.0	11.3	10.3
RM MG1-40	40	62.0	51	58	4	52.2	58.0	48.8	30.0	9.0	22.0	14.0	10.0	11.8	10.8
RM MG1-42	42	65.5	/	/	/	/	/	51.8	30.0	/	/	/	/	13.2	12.0
RM MG1-43	43	65.5	54	61	4	53.3	62.0	51.8	30.0	9.0	22.0	14.0	10.0	13.2	12.0
RM MG1-45	45	68.0	56	63	4	55.3	64.0	53.8	30.0	9.0	22.0	14.0	10.0	12.8	11.6
RM MG1-48	48	70.5	59	66	4	59.7	68.4	56.8	30.5	9.0	22.0	14.0	10.0	12.8	11.6
RM MG1-50	50	74.0	62	70	4	60.8	69.3	58.8	30.5	9.5	23.0	15.0	10.5	12.8	11.6
RM MG1-53	53	78.5	65	73	4	63.8	72.3	62.2	33.0	11.0	23.0	15.0	12.0	13.5	12.3
RM MG1-55	55	81.0	67	75	4	66.5	75.4	64.2	35.0	11.0	23.0	15.0	12.0	14.5	13.3
RM MG1-58	58	85.5	70	78	4	69.5	78.4	67.2	37.0	11.0	23.0	15.0	12.0	14.5	13.3
RM MG1-60	60	88.5	72	80	4	71.5	80.4	70.0	38.0	11.0	23.0	15.0	12.0	14.5	13.3
RM MG1-65	65	93.5	77	85	4	76.5	85.4	75.0	40.0	11.0	23.0	15.0	12.0	14.2	13.0
RM MG1-68	68	96.5	81	90	4	82.7	91.5	78.0	40.0	11.3	26.0	18.0	12.5	14.9	13.7
RM MG1-70	70	99.5	83	92	4	83.0	92.0	80.0	40.0	11.3	26.0	18.0	12.5	14.2	13.0
RM MG1-75	75	107	88	97	4	90.2	99.0	85.5	40.0	11.3	26.0	18.0	12.5	15.2	14.0
RM MG1-80	80	112	95	105	4	95.2	104.0	90.5	40.0	12.0	26.2	18.2	13.0	16.2	15.0
RM MG1-85	85	120	100	110	4	100.2	109.0	96.0	41.0	14.0	26.2	18.2	15.0	16.0	14.8
RM MG1-90	90	127	105	115	4	105.2	114.0	102	45.0	14.0	26.2	18.2	15.0	16.0	14.8
RM MG1-95	95	132	110	120	4	111.6	120.3	107	46.0	14.0	25.2	17.2	15.0	17.0	15.8
RM MG1-100	100	137	115	125	4	114.5	123.3	112	47.0	14.0	25.2	17.2	15.0	17.0	15.8

# RM MG12




**RM MG12**

**Specification:**

No.	配件/DESCRIPTION	材料/MATERIAL
1	橡胶套/Cup Gasket	NBR / HNBR / VITON
2	静环/Stationary ring	Alumina ceramic/SiC
3	动环/Rotary ring	Graphite carbon/SiC
4	橡胶波纹管/Bellows	NBR / HNBR / VITON
5	弹簧座A/Spring seat A	SUS304
6	弹簧/Spring	SUS304
7	弹簧座B/Spring seat B	SUS304

**Application:**

压力: 1.2MPa      Pressure: 1.2MPa  
 线速度: 10米/秒      Speed: 10M/S  
 温度: -30°C ~ 200°C      Temperature: -30°C ~ 200°C

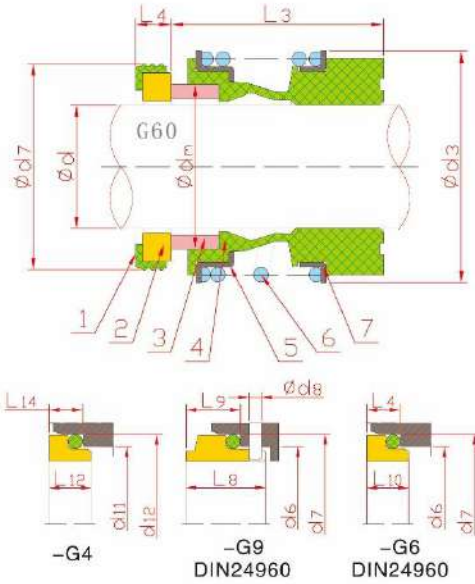

型号	d	d3	d6	d7	d8	d11	d12	dm	L3	L4	L8	L9	L10	L12	L14
RM MG12-10	10	22.5	17	21	3	15.5	19.2	15.7	25.9	6.6	17.5	10.0	7.5	7.5	6.6
RM MG12-12	12	25.0	19	23	3	17.5	21.6	17.0	25.9	6.6	17.5	10.0	7.5	6.5	5.6
RM MG12-14	14	28.5	21	25	3	20.5	24.6	19.7	28.4	6.6	17.5	10.0	7.5	6.5	5.6
RM MG12-15	15	28.5	/	/	/	20.5	24.6	20.8	28.4	/	/	/	/	7.5	6.6
RM MG12-16	16	28.5	23	27	3	22.0	28.0	21.0	28.4	6.6	17.5	10.0	7.5	8.5	7.5
RM MG12-18	18	32.0	27	33	3	24.0	30.0	23.7	30.0	7.5	19.5	11.5	8.5	9.0	8.0
RM MG12-19	19	37.0	/	/	/	/	/	26.7	30.0	/	/	/	/	/	/
RM MG12-20	20	37.0	29	35	3	29.5	35.0	26.7	30.0	7.5	19.5	11.5	8.5	8.5	7.5
RM MG12-22	22	37.0	31	37	3	29.5	35.0	27.7	30.0	7.5	19.5	11.5	8.5	8.5	7.5
RM MG12-24	24	42.5	33	39	3	32.0	38.0	31.2	32.5	7.5	19.5	11.5	8.5	8.5	7.5
RM MG12-25	25	42.5	34	40	3	32.0	38.0	31.2	32.5	7.5	19.5	11.5	8.5	8.5	7.5
RM MG12-28	28	49.0	37	43	3	36.0	42.0	35.0	35.0	7.5	19.5	11.5	8.5	10.0	9.0
RM MG12-30	30	49.0	39	45	3	39.2	45.0	37.0	35.0	7.5	19.5	11.5	8.5	11.5	10.5
RM MG12-32	32	53.5	42	48	3	42.2	48.0	40.2	35.0	7.5	19.5	11.5	8.5	11.5	10.5
RM MG12-33	33	53.5	42	48	3	44.2	50.0	40.2	35.0	7.5	19.5	11.5	8.5	12.0	11.0
RM MG12-35	35	57.0	44	50	3	46.2	52.0	42.2	35.0	7.5	19.5	11.5	8.5	12.0	11.0
RM MG12-38	38	59.0	49	56	4	49.2	55.0	46.2	36.0	9.0	22.0	14.0	10.0	11.3	10.3
RM MG12-40	40	62.0	51	58	4	52.2	58.0	48.8	36.0	9.0	22.0	14.0	10.0	11.8	10.8
RM MG12-42	42	65.5	/	/	/	/	/	51.8	36.0	/	/	/	/	13.2	12.0
RM MG12-43	43	65.5	54	61	4	53.3	62.0	51.8	36.0	9.0	22.0	14.0	10.0	13.2	12.0
RM MG12-45	45	68.0	56	63	4	55.3	64.0	53.8	36.0	9.0	22.0	14.0	10.0	12.8	11.6
RM MG12-48	48	70.5	59	66	4	59.7	68.4	56.8	36.0	9.0	22.0	14.0	10.0	12.8	11.6
RM MG12-50	50	74.0	62	70	4	60.8	69.3	58.8	38.0	9.5	23.0	15.0	10.5	12.8	11.6
RM MG12-53	53	78.5	65	73	4	63.8	72.3	62.2	36.5	11.0	23.0	15.0	12.0	13.5	12.3
RM MG12-55	55	81.0	67	75	4	66.5	75.4	64.2	36.5	11.0	23.0	15.0	12.0	14.5	13.3
RM MG12-58	58	85.5	70	78	4	69.5	78.4	67.2	41.5	11.0	23.0	15.0	12.0	14.5	13.3
RM MG12-60	60	88.5	72	80	4	71.5	80.4	70.0	41.5	11.0	23.0	15.0	12.0	14.5	13.3
RM MG12-65	65	93.5	77	85	4	76.5	85.4	75.0	41.5	11.0	23.0	15.0	12.0	14.9	13.0
RM MG12-68	68	96.5	81	90	4	82.7	91.5	78.0	41.2	11.3	26.0	18.0	12.5	14.9	13.7
RM MG12-70	70	99.5	83	92	4	83.0	92.0	80.0	48.7	11.3	26.0	18.0	12.5	14.2	13.0
RM MG12-75	75	107	88	97	4	90.2	99.0	85.5	48.7	11.3	26.0	18.0	12.5	15.2	14.0
RM MG12-80	80	112	95	105	4	95.2	104.0	90.5	48.0	12.0	26.2	18.2	13.0	16.2	15.0
RM MG12-85	85	120	100	110	4	100.2	109.0	96.0	46.0	14.0	26.2	18.2	15.0	16.0	14.8
RM MG12-90	90	127	105	115	4	105.2	114.0	102	51.0	14.0	26.2	18.2	15.0	16.0	14.8
RM MG12-95	95	132	110	120	4	111.6	120.3	107	51.0	14.0	25.2	17.2	15.0	17.0	15.8
RM MG12-100	100	137	115	125	4	114.5	123.3	112	51.0	14.0	25.2	17.2	15.0	17.0	15.8




# RM MG13



**RM MG13**

**Specification:**

No.	配件/DESCRIPTION	材料/MATERIAL
1	橡胶套/Cup Gasket	NBR / HNBR / VITON
2	静环/Stationary ring	Alumina ceramic/SiC
3	动环/Rotary ring	Graphite carbon/SiC
4	橡胶波纹管/Bellows	NBR / HNBR / VITON
5	弹簧座A/Spring seat A	SUS304
6	弹簧/Spring	SUS304
7	弹簧座B/Spring seat B	SUS304

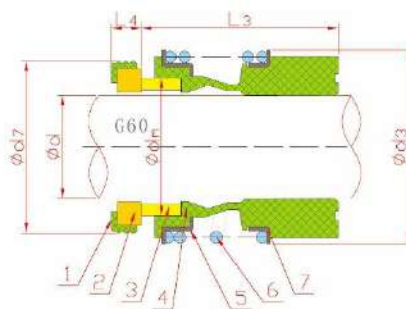


型号	d	d3	d6	d7	d8	d11	d12	dm	L3	L4	L8	L9	L10	L12	L14
RM MG13-10	10	22.5	17	21	3	15.5	19.2	15.7	33.4	6.6	17.5	10	7.5	7.5	6.6
RM MG13-12	12	25	19	23	3	17.5	21.6	17.7	33.4	6.6	17.5	10	7.5	6.5	5.6
RM MG13-14	14	28.5	21	25	3	20.5	24.6	19.7	33.4	6.6	17.5	10	7.5	6.5	5.6
RM MG13-15	15	28.5	/	/	/	20.5	24.6	20.8	33.4	/	/	/	/	7.5	6.6
RM MG13-16	16	28.5	23	27	3	22	28	21	33.4	6.6	17.5	10	7.5	8.5	7.5
RM MG13-18	18	32	27	33	3	24	30	23.7	37.5	7.5	19.5	11.5	8.5	9	8
RM MG13-19	19	37	/	/	/	/	/	26.7	37.5	/	/	/	/	/	/
RM MG13-20	20	37	29	35	3	29.5	35	26.7	37.5	7.5	19.5	11.5	8.5	8.5	7.5
RM MG13-22	22	37	31	37	3	29.5	35	27.7	37.5	7.5	19.5	11.5	8.5	8.5	7.5
RM MG13-24	24	42.5	33	39	3	32	38	31.2	42.5	7.5	19.5	11.5	8.5	8.5	7.5
RM MG13-25	25	42.5	34	40	3	32	38	31.2	42.5	7.5	19.5	11.5	8.5	8.5	7.5
RM MG13-28	28	49	37	43	3	36	42	35	42.5	7.5	19.5	11.5	8.5	10	9
RM MG13-30	30	49	39	45	3	39.2	45	37	42.5	7.5	19.5	11.5	8.5	11.5	10.5
RM MG13-32	32	53.5	42	48	3	42.2	48	40.2	47.5	7.5	19.5	11.5	8.5	11.5	10.5
RM MG13-33	33	53.5	42	48	3	44.2	50	40.2	47.5	7.5	19.5	11.5	8.5	12	11
RM MG13-35	35	57	44	50	3	46.2	52	43.2	47.5	7.5	19.5	11.5	8.5	12	11
RM MG13-38	38	59	49	56	4	49.2	55	46.2	46	9	22	14	10	11.3	10.3
RM MG13-40	40	62	51	58	4	52.2	58	48.8	46	9	22	14	10	11.8	10.8
RM MG13-42	42	65.5	/	/	/	/	/	51.8	51	/	/	/	/	13.2	12
RM MG13-43	43	65.5	54	61	4	53.3	62	51.8	51	9	22	14	10	13.2	12
RM MG13-45	45	68	56	63	4	55.3	64	53.8	51	9	22	14	10	12.8	11.6
RM MG13-48	48	70.5	59	66	4	59.7	68.4	56.8	51	9	22	14	10	12.8	11.6
RM MG13-50	50	74	62	70	4	60.8	69.3	58.8	50.5	9.5	23	15	10.5	12.8	11.6
RM MG13-53	53	78.5	65	73	4	63.8	72.3	62.2	59	11	23	15	12	13.5	12.3
RM MG13-55	55	81	67	75	4	66.5	75.4	64.2	59	11	23	15	12	14.5	13.3
RM MG13-58	58	85.5	70	78	4	69.5	78.4	67.2	59	11	23	15	12	14.5	13.3
RM MG13-60	60	88.5	72	80	4	71.5	80.4	70	59	11	23	15	12	14.5	13.3
RM MG13-65	65	93.5	77	85	4	76.5	85.4	75	69	11	23	15	12	14.2	13
RM MG13-68	68	96.5	81	90	4	82.7	91.5	78	68.7	11.3	26	18	12.5	14.9	13.7
RM MG13-70	70	99.5	83	92	4	83	92	80	68.7	11.3	26	18	12.5	14.2	13
RM MG13-75	75	107	88	97	4	90.2	99	85.5	68.7	11.3	26	18	12.5	15.2	14
RM MG13-80	80	112	95	105	4	95.2	104	90.5	78	12	26.2	18.2	13	16.2	15
RM MG13-85	85	120	100	110	4	100.2	109	96	76	14	26.2	18.2	15	16	14.8
RM MG13-90	90	127	105	115	4	105.2	114	102	76	14	26.2	18.2	15	16	14.8
RM MG13-95	95	132	110	120	4	111.6	120.3	107	76	14	25.2	17.2	15	17	15.8
RM MG13-100	100	137	115	125	4	114.5	123.3	112	76	14	25.2	17.2	15	17	15.8



# RM 2100



RM 2100

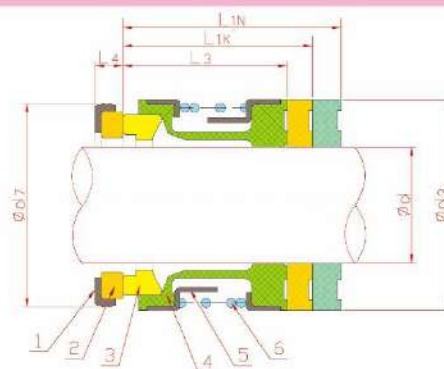

**Specification:**

型号	d	d3	d7	L3	L4	L1K	L1N(DIN)
RM 2100-10	10	20	21	15	5	27.5	35
RM 2100-12	12	22	23	15	6	26.5	34
RM 2100-14	14	24	25	15	6	29.0	34
RM 2100-15	15	25	26	15	6	29.0	34
RM 2100-16	16	26	27	15	6	29.0	34
RM 2100-18	18	32	33	20	6	31.5	39
RM 2100-20	20	34	35	20	6	31.5	39
RM 2100-22	22	36	37	20	6	31.5	39
RM 2100-24	24	38	39	20	6	34.0	44
RM 2100-25	25	39	40	20	6	34.0	44
RM 2100-28	28	42	43	26	6	36.5	44
RM 2100-30	30	44	45	26	7	35.5	43
RM 2100-32	32	46	48	26	7	35.5	48
RM 2100-33	33	47	48	26	7	35.5	48
RM 2100-35	35	49	50	26	8	34.5	47
RM 2100-38	38	54	56	30	8	37.0	47
RM 2100-40	40	56	58	30	8	37.0	47
RM 2100-43	43	59	61	30	8	37.0	52
RM 2100-45	45	61	63	30	8	37.0	52
RM 2100-48	48	64	66	30	10	35.0	50
RM 2100-50	50	66	70	30	10	37.5	50
RM 2100-53	53	69	73	30	10	37.5	60
RM 2100-55	55	71	75	30	10	37.5	60
RM 2100-58	58	78	78	33	10	42.5	60
RM 2100-60	60	80	80	33	12	40.5	58
RM 2100-63	63	83	83	33	12	40.5	58
RM 2100-65	65	85	85	33	12	40.5	68
RM 2100-68	68	88	90	33	12	40.5	68
RM 2100-70	70	90	92	33	12	48.0	68
RM 2100-75	75	99	97	40	12	48.0	88
RM 2100-80	80	104	105	40	14	47.5	77.5
RM 2100-85	85	109	110	40	14	47.5	77.5
RM 2100-90	90	114	115	40	14	52.5	77.5
RM 2100-95	95	119	120	40	14	52.5	77.5
RM 2100-100	100	124	125	40	14	52.5	77.5

**Application:**

压力: 0~1.2MPa      Pressure: 0~1.2MPa  
 线速度: ≤15米/秒      Speed: ≤15米/秒  
 温度: -40℃~150℃      Temperature: -40℃~150℃

No.	配件/DESCRIPTION	材料/MATERIAL
1	橡胶套/Cup Gasket	NBR / VITON
2	静环/Stationary ring	Alumina ceramic/SiC
3	动环/Rotary ring	Graphite carbon/SiC
4	橡胶波纹管/Bellows	NBR / VITON
5	传动套/Retainer	SUS304
6	弹簧/Spring	SUS304

型号	d	d3	d7	L3	L4
RM 2100-3/8"	9.525	20	22.23	15	7.9
RM 2100-1/2"	12.700	24	25.40	15	7.9
RM 2100-5/8"	15.875	26	31.75	15	10.3
RM 2100-3/4"	19.050	32	34.93	20	10.3
RM 2100-7/8"	22.225	36	38.10	20	10.3
RM 2100-1"	25.400	39	41.28	20	11.1
RM 2100-1 1/8"	28.575	42	44.45	26	11.1
RM 2100-1 1/4"	31.750	46	47.63	26	11.1
RM 2100-1 3/8"	34.925	49	50.80	26	11.1
RM 2100-1 1/2"	38.100	54	53.98	30	11.1
RM 2100-1 5/8"	41.275	56	60.33	30	12.7
RM 2100-1 3/4"	44.450	61	63.50	30	12.7
RM 2100-1 7/8"	47.625	64	66.68	30	12.7
RM 2100-2"	50.800	66	69.85	30	12.7
RM 2100-2 1/8"	53.975	69	76.20	30	14.3
RM 2100-2 1/4"	57.150	77	79.38	33	14.3
RM 2100-2 3/8"	60.325	80	82.55	33	14.3
RM 2100-2 1/2"	63.500	83	85.73	33	14.3
RM 2100-2 5/8"	66.675	88	85.73	33	15.9
RM 2100-2 3/4"	69.850	89	88.9	33	15.9
RM 2100-2 7/8"	73.025	96	95.25	33	15.9
RM 2100-3"	76.200	99	98.43	40	15.9
RM 2100-3 1/8"	79.375	103	101.60	40	19.8
RM 2100-3 1/4"	82.550	104	104.78	40	19.8
RM 2100-3 3/8"	85.725	108	107.95	40	19.8
RM 2100-3 1/2"	88.900	112	111.13	40	19.8
RM 2100-3 5/8"	92.075	114	114.30	40	19.8
RM 2100-3 3/4"	95.250	118	117.48	40	19.8
RM 2100-3 7/8"	98.425	122	120.65	40	19.8
RM 2100-4"	101.600	124	123.83	40	19.8



## RM FT RM K




RM FT

型号/Model	d	d4	d1	d2	D	L	L1	L2
RM FT-10	10	15	27	29	23	18	4	7.5
RM FT-12	12	20	32	35	25	19.2	5	8.5
RM FT-16	16	22	41	41.5	31	21.8	5	9.5
RM FT-20	20	30	45	43.8	35	22.5	5	11
RM FT-25	25	35	52	51	44	27.0	7	11.5
RM FT-30	30	40	58	57	48	29.0	8	12.5

■ Application:

Pressure: 0.5MPa  
Speed:15m/s  
Temperature: -30℃~200℃

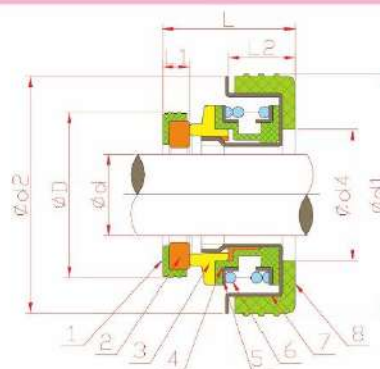

■ Specification:

NO.	配件/DESCRIPTION	材料/MATERIAL
1	橡胶套/Cup Gasket	NBR / HNBR
2	动环/Rotary ring	Alumina ceramic/SiC
3	静环/Stationary ring	Graphite carbon/SiC
4	橡胶波纹管/Bellows	NBR / HNBR
5	弹簧座/Spring seat	SUS304
6	弹簧/Spring	SUS304
7	底座/Bed	SUS304
8	橡胶套/Cup Gasket	NBR / HNBR



RM K

型号/Model	d	d1	d2	L	L2
RM K-12	12	29	36	14	8
RM K-14A	14	34	40.6	15.5	7
RM K-14B	14	30	36	16.5	7
RM K-14C	14	35	40.6	15.5	7
RM K-16A	16	38	43.6	16.5	8
RM K-16B	16	37	42.5	16.5	8
RM K-16C	16	36	42	16.5	8
RM K-17	17	35	44	16.5	6.5
RM K-19	19	40	49	15.5	8
RM K-20	20	35	46	16.5	8
RM K-28	28	49	56.5	27.5	9.5

■ Application:

Pressure: 0.6MPa  
Speed:5m/s  
Temperature: -30℃~200℃

■ Specification:

NO.	配件/DESCRIPTION	材料/MATERIAL
1	静环/Stationary ring	Graphite carbon
2	橡胶波纹管/Bellows	NBR
3	弹簧/Spring	SUS304
4	弹簧座/Spring seat	SUS304

For more information pls visit us in [www.rimiseal.com](http://www.rimiseal.com)

There are Mechanical seal Catalog (2) Automotive seal catalog (3)