





# Metric series



Technical

Dimension





Bore Diameter: d		Outer Diameter: D		Flange Diameter: Df		Radius: r <sub>s</sub> (min)		Open Bearings				Seal, Shield Bearings						
								Width: B		Flange Width: Bf		Bearing Reference						
mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	Open	Flange Open	Shield	Flange Shield	Seal		
																2RS	2RU	TTS
0.6	0.0236	2.5	0.0984	—	—	0.05	0.0020	1.0	0.0394	—	—	68/0.6	—	—	—	—	—	—
1.0	0.0394	3	0.1181	3.8	0.1496	0.05	0.0020	1.0	0.0394	0.3	0.0118	681	F681	—	—	—	—	—
		3	0.1181	—	—	0.05	0.0020	1.5	0.0591	—	—	MR31	—	—	—	—	—	—
		4	0.1575	5.0	0.1969	0.10	0.0039	1.6	0.0630	0.5	0.0197	691	F691	—	—	—	—	—
1.2	0.0472	4	0.1575	4.8	0.1890	0.10	0.0039	1.8	0.0709	0.4	0.0157	MR41X	MF41X	MR41XZZ	—	—	—	—
1.5	0.0591	4	0.1575	5.0	0.1969	0.05	0.0020	1.2	0.0472	0.4	0.0157	681X	F681X	681XZZ	F681XZZ	—	—	—
		5	0.1969	6.5	0.2559	0.15	0.0059	2.0	0.0787	0.6	0.0236	691X	F691X	691XZZ	F691XZZ	—	—	—
		6	0.2362	7.5	0.2953	0.15	0.0059	2.5	0.0984	0.6	0.0236	601X	F601X	601XZZ	F601XZZ	—	—	—
2.0	0.0787	4	0.1575	—	—	0.05	0.0020	1.2	0.0472	—	—	672	—	672ZZ	—	—	—	—
		5	0.1969	6.1	0.2402	0.08	0.0031	1.5	0.0591	0.5	0.0197	682	F682	682ZZ	F682ZZ	—	—	—
		5	0.1969	6.2	0.2441	0.10	0.0039	2.0	0.0787	0.6	0.0236	MR52	MF52	MR52ZZ	MF52ZZ	—	—	—
		6	0.2362	7.5	0.2953	0.15	0.0059	2.3	0.0906	0.6	0.0236	692	F692	692ZZ	F692ZZ	—	—	TTS
		6	0.2362	7.2	0.2853	0.15	0.0059	2.5	0.0984	0.6	0.0236	MR62	MF62	MR62ZZ	—	—	—	
		7	0.2756	8.2	0.3228	0.15	0.0059	2.5	0.0984	0.6	0.0236	MR72	MF72	MR72ZZS	MF72ZZS	—	—	TTS
		7	0.2756	8.5	0.3346	0.15	0.0059	2.8	0.1102	0.7	0.0276	602	F602	602ZZS	F602ZZS	—	—	TTS
2.5	0.0984	6	0.2362	7.1	0.2795	0.08	0.0031	1.8	0.0709	0.5	0.0197	682X	F682X	682XZZ	F682XZZ	—	—	—
		7	0.2756	8.5	0.3346	0.15	0.0059	2.5	0.0984	0.7	0.0276	692X	F692X	692XZZS	F692XZZS	—	—	TTS
		8	0.3150	9.2	0.3622	0.20	0.0079	2.5	0.0984	0.6	0.0236	MR82X	MF82X	—	—	—	—	—
		8	0.3150	9.5	0.3740	0.15	0.0059	2.8	0.1102	0.7	0.0276	602X	F602X	602XZZ	F602X	—	—	—
3.0	0.1181	6	0.2362	7.2	0.2835	0.10	0.0039	2.0	0.0787	0.6	0.0236	MR63	MF63	MR63ZZ	MF63ZZ	—	—	—
		7	0.2756	8.1	0.3189	0.10	0.0039	2.0	0.0787	0.5	0.0197	683	F683	683ZZ	F683ZZ	—	—	TTS <sup>4</sup>
		8	0.3150	9.2	0.3622	0.15	0.0059	2.5	0.0984	0.6	0.0236	MR83	MF83	MR83ZZ	—	—	—	
		8	0.3150	9.5	0.3740	0.15	0.0059	3.0	0.1181	0.7	0.0276	693	F693	693ZZ	F693ZZ	2RS	—	—
		9	0.3543	10.2 <sup>1</sup>	0.4016	0.20	0.0079	2.5	0.0984	0.6	0.0236	MR93	MF93	MR93ZZ	MF93ZZ	—	—	—
		9	0.3543	10.5	0.4134	0.15	0.0059	3.0	0.1181	0.7	0.0276	603	F603	603ZZ	F603ZZ	—	—	—
		10	0.3937	11.5	0.4528	0.15	0.0059	4.0	0.1575	1.0	0.0394	623	F623	623ZZ	F623ZZ	2RS	2RU	—
		13	0.5118	—	—	0.20	0.0079	5.0	0.1969	—	—	633	—	633ZZ	—	2RS	2RU	—
4.0	0.1575	7	0.2756	8.2	0.3228	0.10	0.0039	2.0	0.0787	0.6	0.0236	MR74	MF74	—	—	—	—	—
		7	0.2756	8.2	0.3228	0.10	0.0039	—	—	—	—	—	—	MR74ZZ	MF74ZZ	—	—	—
		—	—	—	—	0.15	0.0059	—	—	—	—	—	—	MR84	MF84	—	—	—
		8	0.3150	9.2	0.3622	0.10	0.0039	2.0	0.0787	0.6	0.0236	—	—	MR84ZZ	MF84ZZ	—	—	—
		9	0.3543	10.3	0.4055	0.10	0.0039	2.5	0.0984	0.6	0.0236	684	F684	684ZZ	F684ZZ	2RS	2RU	TTS
		—	—	—	—	0.20	0.0079	—	—	—	—	—	—	MR104	MF104	—	—	—
		10	0.3937	11.2 <sup>1</sup>	0.4409	0.15	0.0059	3.0	0.1181	0.6	0.0236	—	—	MR104ZZ	MF104ZZ	2RS	2RU	—
		11	0.4331	12.5	0.4921	0.15	0.0059	4.0	0.1575	1.0	0.0394	694	F694	694ZZ	F694ZZ	2RS	2RU	—
		12	0.4724	13.5	0.5315	0.20	0.0079	4.0	0.1575	1.0	0.0394	604	F604	604ZZ	F604ZZ	2RS	2RU	—
		13	0.5118	15.0	0.5906	0.20	0.0079	5.0	0.1969	1.0	0.0394	624	F624	624ZZ	F624ZZ	2RS	2RU	—
16	0.6299	18.0	0.7087	0.30	0.0118	5.0	0.1969	1.0	0.0394	634	F634	634ZZ	F634ZZ	2RS	2RU	TTS		

1) \*This dimension is increased by 0.4mm for shielded or seal version.

4) TTS<sup>4</sup> is used smaller ball, load rating is lower than standard.




2) Bearings also available with single shield or seal : suffix Z, RS, RU or TS

3) Bearings also available with stainless material : suffix S or H

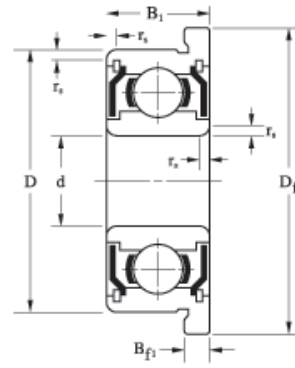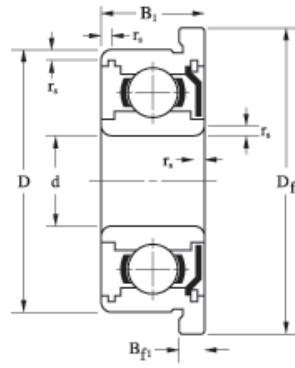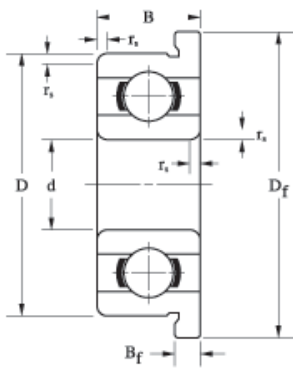

Width: B <sub>1</sub>		Flange Width:Bf1		Load Rating				Cage Type	Ball Complement			Weight (Reference)			
				Cr(N)	Cor(N)	Max. Speed			Qty.:Z	Size:Dw		Open	Flange Open	Shield	Flange Shield
						Grease	Oil			mm	inch				
mm	inch	mm	inch			x1000rpm		pcs.	mm	inch					
—	—	—	—	68	16	142	160	W	5	0.500	0.0197	0.02	—	—	—
—	—	—	—	96	26	130	150	W	6	0.600	0.0236	0.03	0.04	—	—
—	—	—	—	96	26	130	150	W	6	0.600	0.0236	0.05	—	—	—
—	—	—	—	141	37	100	120	W	5	0.800	0.0315	0.11	0.14	—	—
2.5	0.0984	—	—	112	33	110	130	W	7	0.600	0.0236	0.10	0.12	0.14	—
2.0	0.0787	0.6	0.0236	112	33	100	120	W	7	0.600	0.0236	0.10	0.12	0.14	0.17
2.6	0.1024	0.8	0.0315	169	50	85	100	W	6	1.000	0.0394	0.20	0.26	0.25	0.33
3.0	0.1181	0.8	0.0315	330	99	75	90	W	6	1.200	0.0472	0.31	0.38	0.40	0.50
2.0	0.0787	—	—	124	40	91	104	W	8	0.600	0.0236	0.05	—	0.07	—
2.3	0.0906	0.6	0.0236	169	50	85	100	W	6	0.800	0.0315	0.15	0.19	0.20	0.24
2.5	0.0984	0.6	0.0236	169	50	85	100	W	6	0.800	0.0315	0.14	0.19	0.20	0.25
3.0	0.1181	0.8	0.0315	330	99	75	90	W,J,TW	6	1.200	0.0472	0.28	0.35	0.35	0.45
2.5	0.0984	—	—	330	99	75	90	W,J	6	1.200	0.0472	0.28	0.34	0.33	—
3.0	0.1181	0.6	0.0236	386	129	63	75	W	7	1.200	0.0472	0.43	0.50	0.53	0.60
3.5	0.1378	0.9	0.0354	386	129	60	71	W	7	1.200	0.0472	0.50	0.60	0.60	0.73
2.6	0.1024	0.8	0.0315	209	74	71	80	W	8	0.800	0.0315	0.20	0.24	0.35	0.42
3.5	0.1378	0.9	0.0354	386	129	63	75	W	7	1.200	0.0472	0.40	0.50	0.55	0.68
—	—	—	—	558	180	60	67	W	6	1.588	0.0625	0.52	0.60	—	—
4.0	0.1575	0.9	0.0354	552	177	60	71	W	6	1.588	0.0625	0.61	0.72	0.85	0.99
2.5	0.0984	0.6	0.0236	209	74	71	80	W	8	0.800	0.0315	0.20	0.26	0.28	0.34
3.0	0.1181	0.8	0.0315	311	112	63	75	W	8	1.000	0.0394	0.32	0.37	0.45	0.53
3.0	0.1181	—	—	395	141	60	67	J	7	1.200	0.0472	0.51	0.59	0.67	—
4.0	0.1575	0.9	0.0354	558	180	60	67	W,J,TW	6	1.588	0.0625	0.60	0.71	0.80	0.94
4.0	0.1575	0.8	0.0315	571	189	56	67	W	6	1.588	0.0625	0.75	0.83	1.15	1.30
5.0	0.1969	1.0	0.0394	571	189	56	67	W	6	1.588	0.0625	0.84	0.96	1.13	1.61
4.0	0.1575	1.0	0.0394	631	219	50	60	J,TW	7	1.588	0.0625	1.45	1.65	1.65	1.85
5.0	0.1969	—	—	1301	488	40	48	J	7	2.381	0.0937	3.27	—	3.43	—
—	—	—	—	311	115	60	67	W	8	1.000	0.0394	0.23	0.30	—	—
2.5	0.0984	0.6	0.0236	255	108	60	67	W	11	0.800	0.0315	—	—	0.33	0.40
3.0	0.1181	0.6	0.0236	395	141	56	67	W,J,TW	7	1.200	0.0472	0.39	0.47	0.56	0.64
4.0	0.1575	1.0	0.0394	641	227	53	63	W,J,TW	7	1.588	0.0625	0.65	0.74	1.00	1.15
4.0	0.1575	0.8	0.0315	711	272	48	56	J	8	1.588	0.0625	0.96	1.04	1.33	1.50
4.0	0.1575	1.0	0.0394	957	350	48	56	J	7	2.000	0.0787	1.69	1.91	1.75	1.97
4.0	0.1575	1.0	0.0394	957	350	48	56	J	7	2.000	0.0787	2.19	2.42	2.34	2.57
5.0	0.1969	1.0	0.0394	1301	488	40	48	J	7	2.381	0.0937	3.10	3.44	3.20	3.54
5.0	0.1969	1.0	0.0394	1340	523	36	43	J	7	2.381	0.0937	5.24	5.66	5.44	5.86

# Metric series (continued)



Bore Diameter: d		Outer Diameter: D		Flange Diameter: Df		Radius r_s(min)		Open Bearings				Seal, Shield Bearings							
mm	inch	mm	inch	mm	inch	mm	inch	Width: B		Flange Width: Bf		Bearing Reference				Seal			
								mm	inch	mm	inch	Open	Flange Open	Shield	Flange Shield	2RS	2RU	TTS	
5.0	0.1969	8	0.3150	9.2	0.3622	0.10	0.0039	2.0	0.0787	0.6	0.0236	MR85	MF85	-	-	-	-	-	
		8	0.3150	9.2	0.3622	0.10	0.0039	-	-	-	-	-	-	MR85ZZ	MF85ZZ	-	-	TTS	
			9	0.3543	10.2	0.4016	0.15	0.0059	2.5	0.0984	0.6	0.0236	MR95	MF95	MR95ZZS	MF95ZZS	-	-	TTS
			10	0.3937	11.2*	0.4409	0.15	0.0059	3.0	0.1181	0.6	0.0236	MR105	MF105	MR105ZZ	MF105ZZ	2RS	2RU	-
			11	0.4331	12.6	0.4961	0.15	0.0059	-	-	-	-	-	-	MR115ZZ	MF115ZZ	2RS	2RU	-
			11	0.4331	12.5	0.4921	0.15	0.0059	3.0	0.1181	0.8	0.0315	685	F685	685ZZ	F685ZZ	2RS	2RU	-
			13	0.5118	15.0	0.5906	0.20	0.0079	4.0	0.1575	1.0	0.0394	695	F695	695ZZ	F695ZZ	2RS	2RU	TTS <sup>4)</sup>
			14	0.5512	16.0	0.6299	0.20	0.0079	5.0	0.1969	1.0	0.0394	605	F605	605ZZ	F605ZZ	2RS	2RU	-
			16	0.6299	18.0	0.7087	0.30	0.0118	5.0	0.1969	1.0	0.0394	625	F625	625ZZ	F625ZZ	2RS	2RU	TTS
			19	0.7480	22.0	0.8661	0.30	0.0118	6.0	0.2362	1.5	0.0591	635	F635	635ZZ	F635ZZ	2RS	2RU	-
6.0	0.2362	10	0.3937	11.2	0.4409	0.10	0.0039	2.5	0.0984	0.6	0.0236	MR106	MF106	MR106ZZ	MF106ZZ	-	-	TTS <sup>4)</sup>	
						0.15	0.0059					MR106	MF106						
			12	0.4724	13.2*	0.5197	0.15	0.0059	3.0	0.1181	0.6	0.0236	MR126	MF126	MR126ZZ	MF126ZZ	2RS	2RU	-
			13	0.5118	15.0	0.5906	0.15	0.0059	3.5	0.1378	1.0	0.0394	686	F686	686ZZ	F686ZZ	2RS	2RU	TTS
			15	0.5906	17.0	0.6693	0.20	0.0079	5.0	0.1969	1.2	0.0472	696	F696	696ZZ	F696ZZ	2RS	2RU	TTS
			16	0.6299	-	-	0.20	0.0079	5.0	0.1969	-	-	-	-	696AZZ	-	2RS	2RU	-
			17	0.6693	19.0	0.7480	0.30	0.0118	6.0	0.2362	1.2	0.0472	606	F606	606ZZ	F606ZZ	2RS	2RU	-
			19	0.7480	22.0	0.8661	0.30	0.0118	6.0	0.2362	1.5	0.0591	626	F626	626ZZ	F626ZZ	2RS	2RU	TTS <sup>4)</sup>
			22	0.8661	-	-	0.30	0.0118	7.0	0.2756	-	-	636	-	636ZZ	-	2RS	2RU	-
	7.0	0.2756	11	0.4331	12.2	0.4803	0.10	0.0039	2.5	0.0984	0.6	0.0236	MR117	MF117	MR117ZZS	MF117ZZS	-	-	TTS
						0.20	0.0079					MR117	MF117						
			13	0.5118	14.2*	0.5591	0.15	0.0059	3.0	0.1181	0.6	0.0236	MR137	MF137	MR137ZZ	MF137ZZ	-	-	TTS
			14	0.5512	16.0	0.6299	0.15	0.0059	3.5	0.1378	1.0	0.0394	687	F687	687ZZ	F687ZZ	2RS	2RU	TTS
			17	0.6693	19.0	0.7480	0.30	0.0118	5.0	0.1969	1.2	0.0472	697	F697	697ZZ	F697ZZ	2RS	2RU	-
			19	0.7480	22.0	0.8661	0.30	0.0118	6.0	0.2362	1.5	0.0591	607	F607	607ZZ	F607ZZ	2RS	2RU	TTS <sup>4)</sup>
			22	0.8661	25.0	0.9843	0.30	0.0118	7.0	0.2756	1.5	0.0591	627	F627	627ZZ	F627ZZ	2RS	2RU	TTS
			26	1.0236	-	-	0.30	0.0118	9.0	0.3543	-	-	637	-	637ZZ	-	2RS	2RU	-
8.0	0.3150	12	0.4724	13.2*	0.5197	0.10	0.0039	2.5	0.0984	0.6	0.0236	MR128	MF128	MR128ZZ	MF128ZZ	-	-	TTS	
						0.20	0.0079					MR128	MF128						
			14	0.5512	15.6	0.6142	0.15	0.0059	3.5	0.1378	0.8	0.0315	MR148	MF148	MR148ZZ	MF148ZZ	2RS	2RU	-
			16	0.6299	18.0	0.7087	0.20	0.0079	4.0	0.1575	1.0	0.0394	688	F688	688ZZ	F688ZZ	2RS	2RU	TTS
			19	0.7480	22.0	0.8661	0.30	0.0118	6.0	0.2362	1.5	0.0591	698	F698	698ZZ	F698ZZ	2RS	2RU	-
			22	0.8661	25.0	0.9843	0.30	0.0118	7.0	0.2756	1.5	0.0591	608	F608	608ZZ	F608ZZ	2RS	2RU	TTS
			24	0.9449	-	-	0.30	0.0118	8.0	0.3150	-	-	628	-	628ZZ	-	2RS	2RU	-
			28	1.1024	-	-	0.30	0.0118	9.0	0.3543	-	-	638	-	638ZZ	-	2RS	2RU	-
9.0	0.3543	14	0.5512	15.5	0.6102	0.10	0.0039	3.0	0.1181	0.8	0.0315	679	F679	679ZZS	F679ZZS	-	-	TTS	
				17	0.6693	19.0	0.7480	0.20	0.0079	4.0	0.1575	1.0	0.0394	689	F689	689ZZ	F689ZZ	2RS	2RU
			20	0.7874	23.0	0.9055	0.30	0.0118	6.0	0.2362	1.5	0.0591	699	F699	699ZZ	F699ZZ	2RS	2RU	-
			24	0.9449	27.0	1.0630	0.30	0.0118	7.0	0.2756	1.5	0.0591	609	F609	609ZZ	F609ZZ	2RS	2RU	-
			26	1.0236	-	-	0.60 <sup>5)</sup>	0.0236 <sup>5)</sup>	8.0	0.3150	-	-	629	-	629ZZ	-	2RS	2RU	-
			30	1.1811	-	-	0.60	0.0236	10.0	0.3937	-	-	639	-	639ZZ	-	2RS	2RU	-

1) \*This dimension is increased by 0.4mm for shielded or seal version.





2) Bearings also available with single shield or seal : suffix Z, RS, RU or TS

3) Bearings also available with stainless material : suffix S or H

4) TTS<sup>4)</sup> is used smaller ball, load rating is lower than standard.

5) Value<sup>5)</sup> isn't based upon JIS B 1521.



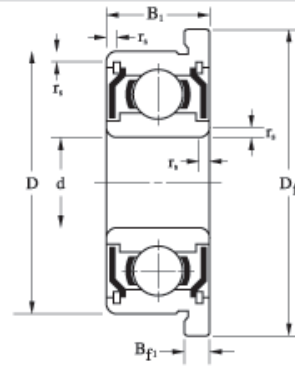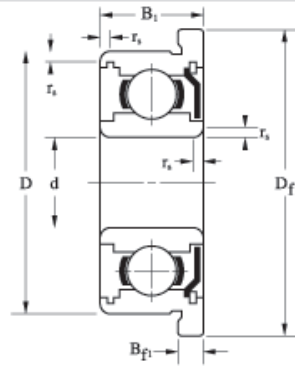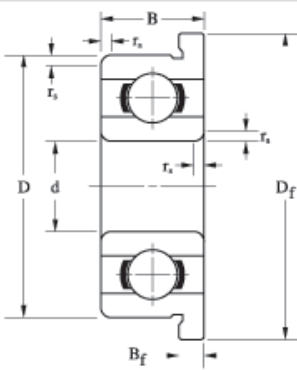

Width: B1		Flange Width: Bf1		Load Rating				Cage Type	Ball Complement			Weight (Reference)			
mm	inch	mm	inch	Cr(N)	Cor(N)	Max. Speed			Qty.:Z	Size:Dw		Open	Flange Open	Shield	Flange Shield
						Grease	Oil			mm	inch				
—	—	—	—	308	120	53	63	W	8	1.000	0.0394	0.25	0.33	—	—
2.5	0.0984	0.6	0.0236	218	90	53	63	W	9	0.800	0.0315	—	—	0.34	0.42
3.0	0.1181	0.6	0.0236	431	169	50	60	W	8	1.200	0.0472	0.54	0.62	0.58	0.66
4.0	0.1575	0.8	0.0315	431	169	50	60	W	8	1.200	0.0472	0.91	1.00	1.26	1.38
4.0	0.1575	0.8	0.0315	716	282	45	53	J	8	1.588	0.0625	—	—	0.62	0.81
5.0	0.1969	1.0	0.0394	716	282	45	53	J,TW	8	1.588	0.0625	1.16	1.33	1.93	2.15
4.0	0.1575	1.0	0.0394	1077	432	43	50	J	8	2.000	0.0787	2.39	2.73	2.31	2.65
5.0	0.1969	1.0	0.0394	1329	507	40	50	J,TW	7	2.381	0.0937	3.46	3.83	3.75	4.12
5.0	0.1969	1.0	0.0394	1729	675	36	43	J,TW	7	2.778	0.1094	4.95	5.37	5.10	5.52
6.0	0.2362	1.5	0.0591	2336	896	32	40	J,TW	6	3.500	0.1378	8.50	9.26	8.89	9.65
3.0	0.1181	0.6	0.0236	496	218	45	53	W	10	1.200	0.0472	0.55	0.64	0.70	0.79
4.0	0.1575	0.8	0.0315	716	295	43	50	W,J,TW	8	1.588	0.0625	1.25	1.44	1.66	1.86
5.0	0.1969	1.1	0.0433	1082	442	40	50	J,TW	8	2.000	0.0787	1.87	2.21	2.68	3.06
5.0	0.1969	1.2	0.0472	1340	523	40	45	J	7	2.381	0.0937	3.85	4.24	3.65	4.04
5.0	0.1969	—	—	1340	523	40	45	J	7	2.381	0.0937	—	—	4.59	—
6.0	0.2362	1.2	0.0472	2263	846	38	45	J	6	3.500	0.1378	5.94	6.47	6.89	7.42
6.0	0.2362	1.5	0.0591	2336	896	32	40	J,TW	6	3.500	0.1378	8.12	9.25	8.65	9.78
7.0	0.2756	—	—	3333	1423	30	36	J,TW	7	3.969	0.1563	13.9	—	14.5	—
3.0	0.1181	0.6	0.0236	455	202	43	50	W	9	1.200	0.0472	0.59	0.69	0.71	0.81
4.0	0.1575	0.8	0.0315	541	276	40	48	W	12	1.200	0.0472	1.52	1.64	2.01	2.17
5.0	0.1969	1.1	0.0433	1173	513	40	50	J	9	2.000	0.0787	2.03	2.40	2.95	3.35
5.0	0.1969	1.2	0.0472	1605	719	36	43	J	9	2.381	0.0937	5.26	5.79	5.01	5.54
6.0	0.2362	1.5	0.0591	2336	896	36	43	J,TW	6	3.500	0.1378	7.80	8.93	8.24	9.37
7.0	0.2756	1.5	0.0591	3287	1379	30	36	J,TW	7	3.969	0.1563	12.7	14.0	13.1	14.4
9.0	0.3543	—	—	4563	1983	28	34	J	7	4.762	0.1875	24.2	—	25.8	—
3.5	0.1378	0.8	0.0315	543	274	40	48	W	12	1.200	0.0472	0.70	0.81	0.99	1.14
4.0	0.1575	0.8	0.0315	817	386	38	45	J	10	1.588	0.0625	1.90	2.13	2.19	2.42
5.0	0.1969	1.1	0.0433	1252	592	36	43	J,TW	10	2.000	0.0787	3.11	3.53	4.05	4.51
6.0	0.2362	1.5	0.0591	2237	917	36	43	J	7	3.175	0.1250	7.12	8.50	7.57	8.70
7.0	0.2756	1.5	0.0591	3293	1379	34	40	J,TW	7	3.969	0.1563	11.8	13.1	12.9	14.2
8.0	0.3150	—	—	3333	1423	28	34	J	7	3.969	0.1563	17.1	—	18.5	—
9.0	0.3543	—	—	4563	1983	28	34	J	7	4.762	0.1875	28.1	—	30.3	—
4.5	0.1772	0.8	0.0315	919	468	36	42	J	12	1.588	0.0625	1.35	1.57	1.98	2.20
5.0	0.1969	1.1	0.0433	1327	668	36	43	J	11	2.000	0.0787	3.41	3.85	4.38	4.87
6.0	0.2362	1.5	0.0591	2467	1081	34	40	J	8	3.175	0.1250	8.38	9.57	8.54	9.73
7.0	0.2756	1.5	0.0591	3356	1444	32	38	J	7	3.969	0.1563	14.7	16.1	16.0	17.4
8.0	0.3150	—	—	4563	1983	28	34	J	7	4.762	0.1875	19.0	—	21.8	—
10.0	0.3937	—	—	4659	2080	24	30	J	7	4.762	0.1875	36.2	—	37.1	—