

BHT FB 450°

BECO PLUS



6000



	∅ (B)	∅ (D)	(W)	/	kN	450°C	kN	20°C
6000 BHT FB 450° BECO PLUS	10	26	8	90	1,22		1,96	
6001 BHT FB 450° BECO PLUS	12	28	8	85	1,47		2,36	
6002 BHT FB 450° BECO PLUS	15	32	9	80	1,78		2,85	
6003 BHT FB 450° BECO PLUS	17	35	10	75	2,03		3,25	
6004 BHT FB 450° BECO PLUS	20	42	12	70	3,12		5,00	
6005 BHT FB 450° BECO PLUS	25	47	12	65	3,65		5,85	
6006 BHT FB 450° BECO PLUS	30	55	13	60	5,00		8,00	
6007 BHT FB 450° BECO PLUS	35	62	14	55	6,50		10,4	
6008 BHT FB 450° BECO PLUS	40	68	15	50	7,37		11,8	
6009 BHT FB 450° BECO PLUS	45	75	16	45	8,93		14,3	
6010 BHT FB 450° BECO PLUS	50	80	16	40	9,75		15,6	
6011 BHT FB 450° BECO PLUS	55	90	18	40	13,25		21,2	
6012 BHT FB 450° BECO PLUS	60	95	18	40	14,50		23,2	
6013 BHT FB 450° BECO PLUS	65	100	18	40	15,62		25,0	
6014 BHT FB 450° BECO PLUS	70	110	20	40	19,69		31,5	
6015 BHT FB 450° BECO PLUS	75	115	20	40	21,25		34,0	

6200

	∅ (B)	∅ (D)	(W)	/	kN	450°C	kN	20°C
6200 BHT FB 450° BECO PLUS	10	30	9	90	1,62		2,60	
6201 BHT FB 450° BECO PLUS	12	32	10	85	1,93		3,10	
6202 BHT FB 450° BECO PLUS	15	35	11	80	2,34		3,75	
6203 BHT FB 450° BECO PLUS	17	40	12	75	2,97		4,75	
6204 BHT FB 450° BECO PLUS	20	47	14	70	4,09		6,55	
6205 BHT FB 450° BECO PLUS	25	52	15	65	5,00		8,00	
6206 BHT FB 450° BECO PLUS	30	62	16	60	7,00		11,2	
6207 BHT FB 450° BECO PLUS	35	72	17	55	9,56		15,3	
6208 BHT FB 450° BECO PLUS	40	80	18	50	11,2		18,0	
6209 BHT FB 450° BECO PLUS	45	85	19	45	12,7		20,4	
6210 BHT FB 450° BECO PLUS	50	90	20	40	15,0		24,0	
6211 BHT FB 450° BECO PLUS	55	100	21	40	18,1		29,0	
6212 BHT FB 450° BECO PLUS	60	110	22	40	22,5		36,0	
6213 BHT FB 450° BECO PLUS	65	120	23	40	25,9		41,5	
6214 BHT FB 450° BECO PLUS	70	125	24	40	27,5		44,0	
6215 BHT FB 450° BECO PLUS	75	130	25	40	30,6		49,0	

6300

	∅ (B)	∅ (D)	(W)	/	kN	450°C	kN	20°C
6300 BHT FB 450° BECO PLUS	10	35	11	90	2,15		3,45	
6301 BHT FB 450° BECO PLUS	12	37	12	85	2,60		4,15	
6302 BHT FB 450° BECO PLUS	15	42	13	80	3,38		5,40	
6303 BHT FB 450° BECO PLUS	17	47	14	75	4,09		6,55	
6304 BHT FB 450° BECO PLUS	20	52	15	70	5,30		8,50	
6305 BHT FB 450° BECO PLUS	25	62	17	65	7,13		11,4	
6306 BHT FB 450° BECO PLUS	30	72	19	60	10,1		16,3	
6307 BHT FB 450° BECO PLUS	35	80	21	55	11,8		19,0	
6308 BHT FB 450° BECO PLUS	40	90	23	50	15,6		25,0	
6309 BHT FB 450° BECO PLUS	45	100	25	45	20,0		32,0	
6310 BHT FB 450° BECO PLUS	50	110	27	40	23,7		38,0	
6311 BHT FB 450° BECO PLUS	55	120	29	40	29,6		47,5	
6312 BHT FB 450° BECO PLUS	60	130	31	40	32,5		52,0	
6313 BHT FB 450° BECO PLUS	65	140	33	40	37,5		60,0	
6314 BHT FB 450° BECO PLUS	70	150	35	40	42,5		68,0	
6315 BHT FB 450° BECO PLUS	75	160	37	40	47,8		76,5	

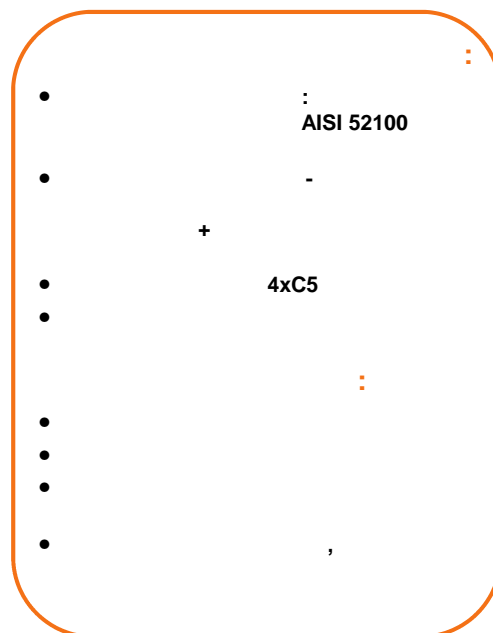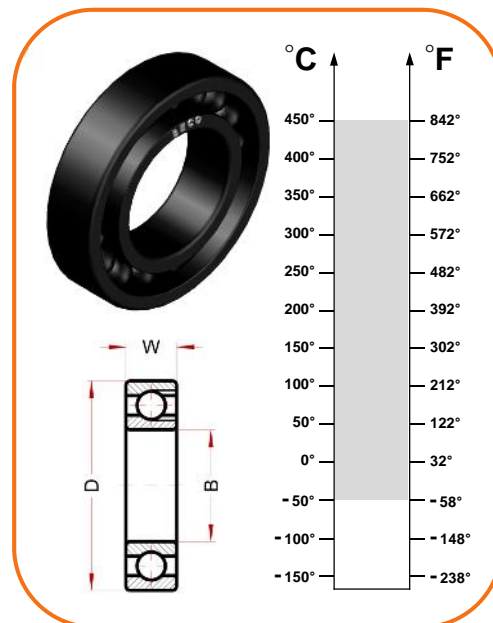

12100 Cuneo - Italy
Via Volta, 7
phone: 0039 0171 66883
fax: 0039 0171 648913

www.becoitalia.it